

SAMSUNG

IREX
QUALITY HAS A NAME



FURNITURE FITTINGS & HARDWARE



ENGINEERED IN KOREA DESIGNED FOR INDIA



COLLECTION 2024
FURNITURE HARDWARE



As a much more reliable business partner for you

We, SAMSUNG Precision Ind. corp., are one of the leading manufacturers of functional furniture hardware.

Our main items cover all hardware parts for kitchen and furniture, such as door hinge, door damper, drawer damper drawer runner & slide, soft-closing system, system furniture, roller system for window and so on.

We provides fine products that are engineered and manufactured with the high quality standards and will give years of satisfying service, certified with ISO 9001, FIRA, LGA, KSA, United States Testing Company, etc. It means that you are assured of consistent quality in every IREX products.





For the last 45 years, SAMSUNG PRECISION has accumulated a massive technical and manufacture know-how, allowed to develop new solutions to fulfill the requirements of market place with its patented irex system.

We, over 400 employees in Samsung Precision Ind. have come together in mind and body to put forth all efforts into making Samsung irex brand. as the better hardware company, And we are even now striving for achieving the more reliable business partner for you.

Please be kindly aware that our goal is not the best company but to be the much more reliable business partner for you.

We expect that the information here gives you a better idea of the scope and scale of your business operations.

And we thank you for your reliable partnership and your sincere support.

QUALITY GUARANTEE

We provide fine products that are engineered and manufactured with the high quality standards and will give years of satisfying service. SAMSUNG PRECISION stands behinds its products and warrants them to be free from Defects in material and workmanship.

We, therefore, guarantees the replacement of any defective product Subject to this warranty.

COMPANY OVERVIEW

We are dedicated to ourselves to make human-friendly and environment-friendly products, integrating digital technology on traditional furniture hardware.

Company	Samsung Precision Ind. Co., Ltd
Head Office / Plant	178-47 Gajwa-dong Seo-gu Incheon Korea

HISTORY

1970~1980	02.1979	Established Samsung Precision Ind.
	12.1986	Moving the head office to Incheon
	07.1987	Selected as "The prospected small and medium enterprises"
	04.1988	Switchover the incorporation to Samsung Precision Ind. Co., Ltd
1990	11.1991	Exporting HINGE PLANT to Hebeisheng in China
	05.1992	Exporting DRAWER RUNNER PLANT to Shanghai in China
	11.1993	Awarded a commendation by the minister of trade and industry
	02.1994	On a TV program "A small enterprise, big economy" on KBS
	11.1994	Certified by FILA in U.K and ANSI/BHMA in U.S.A
	01.1995	Launched a brand name "IREX"
	03.1998	Selected as "The coming Venture Business"
	03.1999	Awarded a presidential commendation (Export part)
	08.1999	Assignment as a federal supporting enterprise (Export part)
	12.1999	Certified by Korean Standards Association (KSA/ISO 9001)
2000	12.1999	Authorizing an institute of Samsung Precision Ind. Co., Ltd
	09.2000	An increase in the capital
	11.2000	Certified by KSA (KS-Cup hinge part)
	06.2001	Certified by KSA (KS-Sash roller part)
	06.2002	Certified by KSA (The Best Product-Hinge part)
	07.2003	Certified by KSA (The Best Product-Wardrobe part)
	08.2003	An overseas investment : Tianjin irex Samsung Precision Ind. Co., Ltd in China
	03.2004	Patent for eccentric screw of kitchen furniture's hinge (Patent No. 426408) (Holding 36 of national and international patents)
	06.2004	Moving the head office to Gajwa-dong, Incheon
	11.2004	Tianjin irex certified by KSA (Hinge and Sash roller part)
	02.2005	Selected as "The INNO-BIZ (Innovation Business)" by the Small and Medium Business Administration
	12.2005	Overseas Investment : Tianjin, China factory(2nd amount invested: USD 2,000,000)
	02.2006	Official Commendation from small & medium business special committee directly responsible to the President
	12.2008	Winning a prize for exporting USD 3,000,000
	08.2009	ISO 14001 Certificate acquired
	11.2010	Winning a prize for exporting USD 5,000,000

THE WINNING HONOR


GERMANY, UK, KOREA, INDIA




U.S.A industrial standard
ANSI/BIFMA



UK industrial standard
FIRA

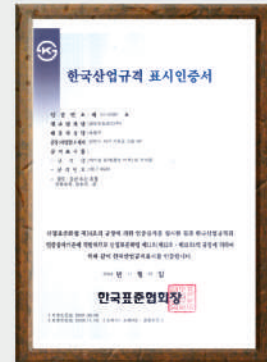

Korean industrial standard
KS

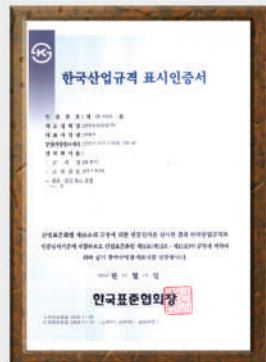

Korean industrial standard
KS



Research institute



INNO-BIZ



ISO 9001



LGA Report
(Door Damper)





“

VISION

**To become India's
most valued &
profitable sales
channel & help our
partners build their
business.**

”

*we are
not*

stuck in the ruts of
destiny, we have the
power to break free .
Clear our vision and see a
new life for ourselves.



“

MISSION

**By providing
an outstanding
selection of
premium products
and adding value to
our partners.**

”

*what
you get*

by achieving your goals is
not as important as what
you become by achieving
your goals.

ATTITUDE

Some people want it to happen, some wish it would happen, others make it happen.

LOYALTY

Look out for people, who look out for you. Loyalty is everything.

TEAM WORK

Great things in business are never done by one person.

OUTPUT

Your input determines your outlook, your outlook determines your output and your output determines your future.

OUR CORE VALUES

SAMSUNG **IREX**
QUALITY HAS A NAME

ATTITUDE

LOYALTY

**TEAM
WORK**

OUTPUT

COMPANY OUTLINE

PARTNERSHIP & SYSTEMS

FURNITURE HARDWARE



FURNITURE HARDWARE

IREX

I
R
E
X

Innovation

IREX as a brand expresses the company's will to make people & lives easier and more unique, based on innovative technology.

Relationship

The bold italic type face expresses rich and differentiated experience. Know-how, advanced technology development.

Excellence

The Red color expresses passionate corporate image and willingness to grow into a global comprehensive hardware solution organisation.

COMPANY OUTLINE

CONTENT

FURNITURE HARDWARE

16-23
HINGES

24-42
HINGES SOFT
CLOSE

43-51
BALL BEARING
SLIDE

52-57
UNDER RAIL

58-75
DRAWER SYSTEM

76-81
INTERNAL
ACCESSORIES

82-85
PVC CUTLERY

86-91
GAS SHOCK
ABSORBER

92-95
LIFT UP





KITCHEN ACCESSORIES

96-123
BASKET

124-135
KUM SERIES

136-151
BAEKUM SERIES

152-155
BUTT HINGES

156-157
BED FITTING

158
LOCKS

159
MAGNETIC CATCHER

160
CONNECTING FITTINGS

161
PLINTH

162-166
ROLLING SHUTTER

167-169
ALUMINIUM PROFILES



OSJANG

172-173
JEWELLERY BOX

174-175
TROUSER RACK

176-177
RATTAN
STORAGE BASKET

178-179
SHOE RACKS

180-181
WARDROBE LIFT

182-183
TUBE

184-185
REVOLVING
SHOE RACK

186-187
DIGITAL LOCKER

188
WARDROBE TUBE

189-200
SLIDING

201-204
PUSH TO OPEN FITTING





SAMSUNG IREX

15

HINGES

Concealed hinges also known as Cabinet Hinges or Cupboard Hinges are used in every kitchen cupboard and also elsewhere around the house, but most people don't know that there is a huge choice of types and sizes that have a variety of different uses, before replacing a hinge in your kitchen or home you'll need to identify the specific hinge that you'll need.

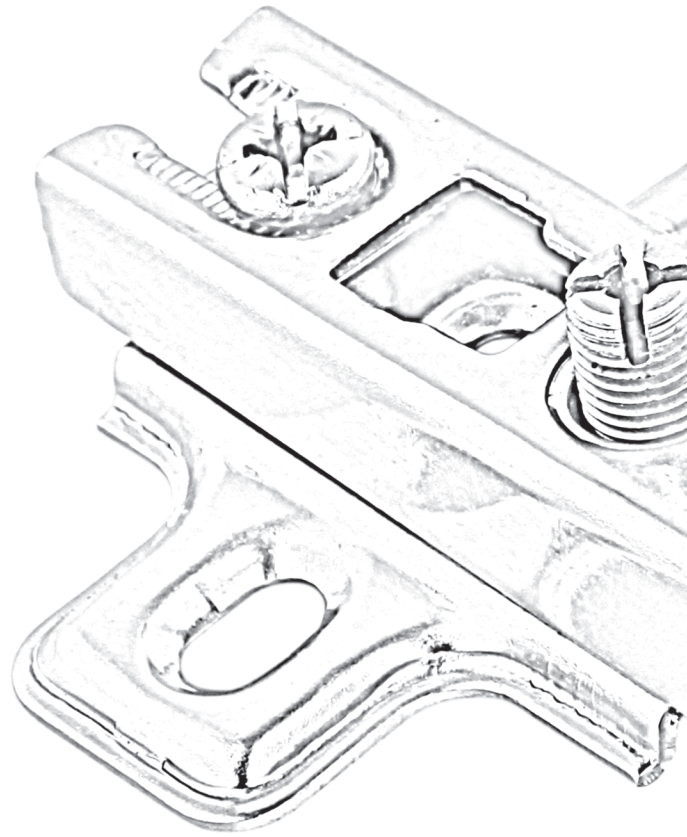

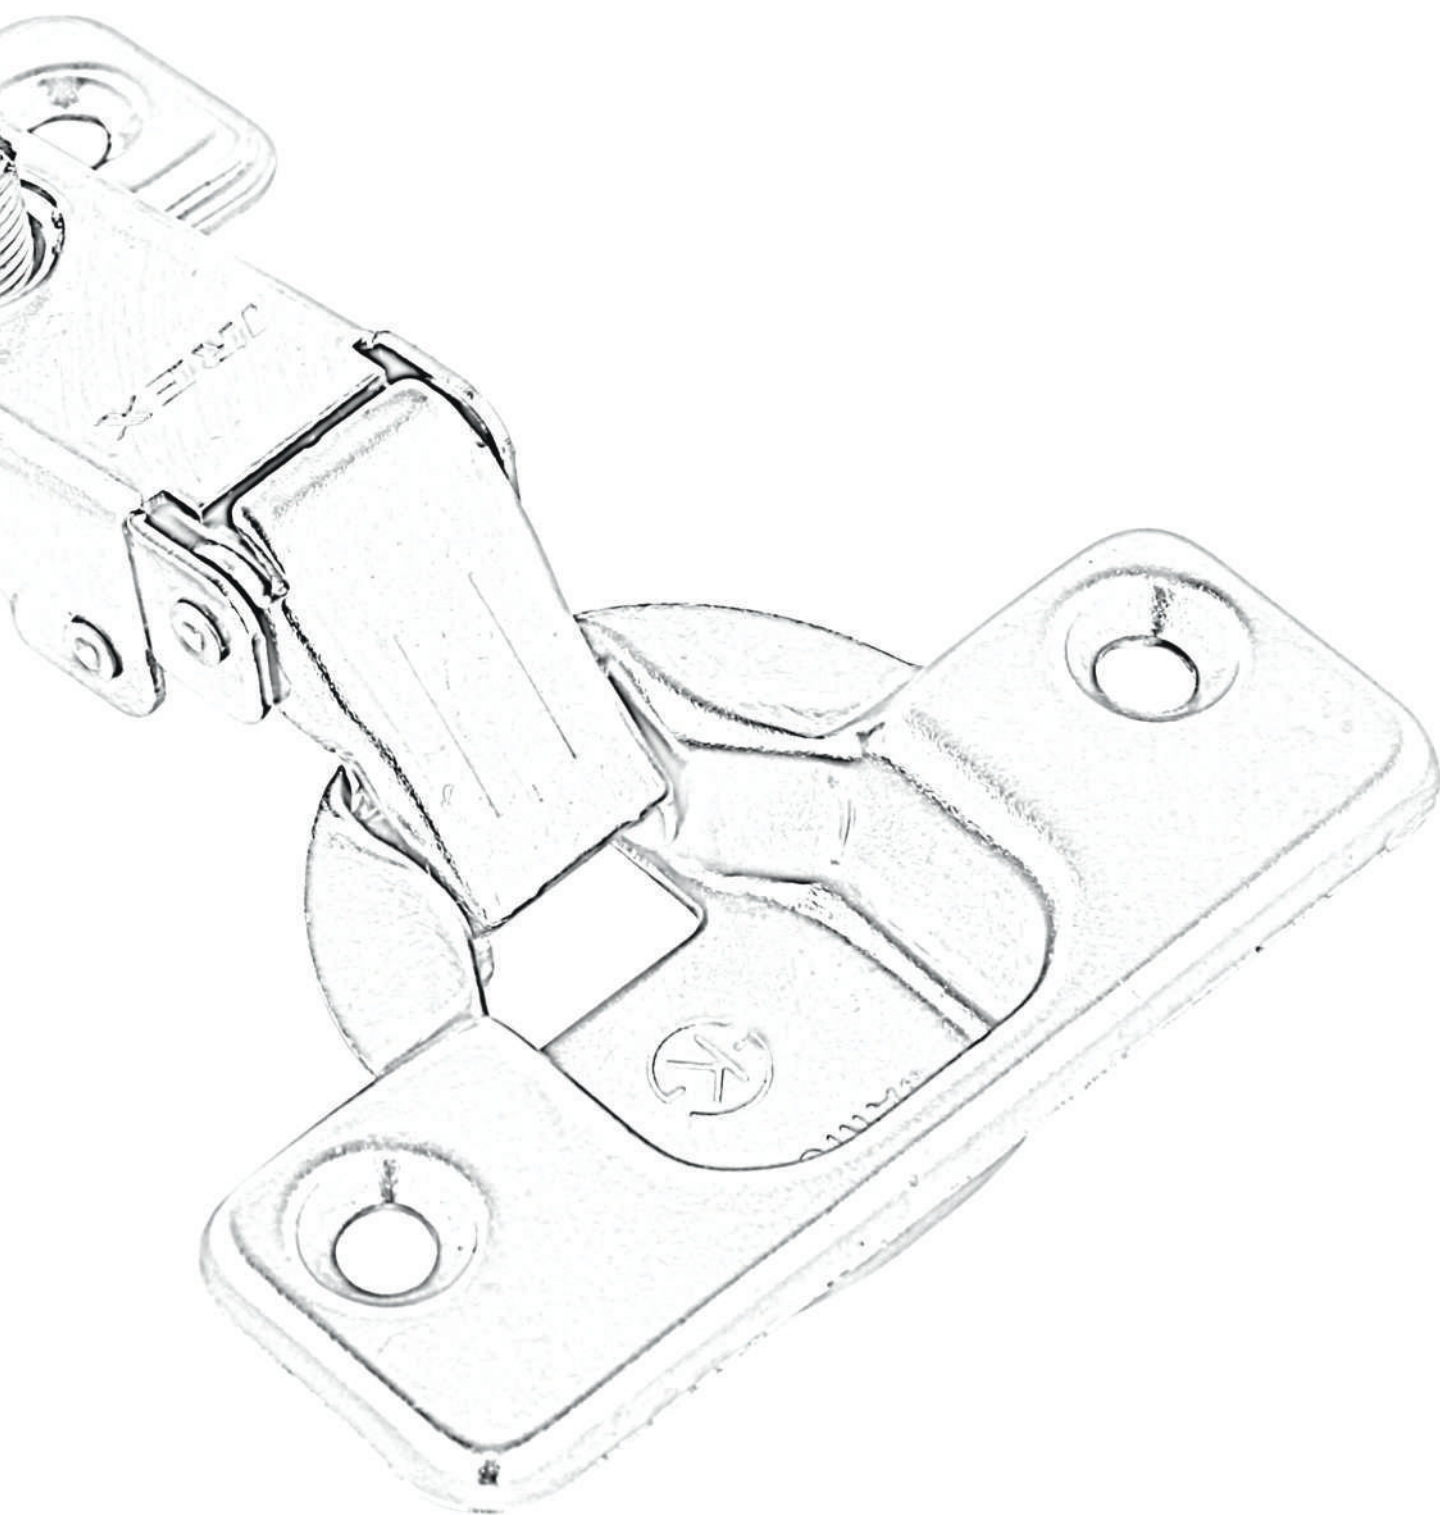

HINGES

550 SERIES



1010550 | Full Overlay- 0 Crank



1010560 | Half Overlay - 9 Crank




1010568 | Inset - 18 Crank

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1010550	Full Overlay - 0 Crank	1	Pair	50
1010560	Half Overlay - 9 Crank	1	Pair	50
1010568	Inset - 18 Crank	1	Pair	50

SLIDE ON HINGE

OPENING ANGLE 95°









Metal hinge

Nickel plated

Opening angle 95°

Self-closing with spring

Spring type : strong spring (N & W-type)

CUP DIMENSION	45 / 9.5	48 / 6	52 / 5.5
			
CUP SPACING	45 / 9.5	48 / 6	52 / 5.5
	<div>Item No</div> <div>550SBN</div>	<div>Item No</div> <div>550SCN</div>	<div>Item No</div> <div>550SHN</div>
Full Overlay Cranking 0mm			
	<div>Item No</div> <div>560SBN</div>	<div>Item No</div> <div>560SCN</div>	<div>Item No</div> <div>560SHN</div>
Half Overlay Cranking 9mm			
	<div>Item No</div> <div>568SBN</div>	<div>Item No</div> <div>568SCN</div>	<div>Item No</div> <div>568SHN</div>
Inset Cranking 18mm			

570 SERIES



1010570 | Full Overlay- 0 Crank



1010580 | Half Overlay - 9 Crank




1010588 | Inset - 18 Crank

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1010570	Full Overlay - 0 Crank	1	Pair	50
1010580	Half Overlay - 9 Crank	1	Pair	50
1010588	Inset - 18 Crank	1	Pair	50

CLIP ON HINGE

OPENING ANGLE 110°








Metal : Steel

Nickel plated

Opening angle 110°

Self-closing with spring (Standard type)

3-Dimensional adjustment
(with relevant mounting plate)

CUP DIMENSION	45 / 9.5	48 / 6	52 / 5.5
			
CUP SPACING	45 / 9.5	48 / 6	52 / 5.5
	Item No 570SB	Item No 570SC	Item No 570SH
Full Overlay Cranking 0mm			
	Item No 580SB	Item No 580SC	Item No 580SH
Half Overlay Cranking 9mm			
	Item No 588SB	Item No 588SC	Item No 588SH
Inset Cranking 18mm			

135 SERIES



1010135 | Pie Cut

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1010135	Pie Cut	1	Pair	50



135° PIE CUT HINGE

135° Hinge for folding door

Products overview



Technical Specification

- hinge for corner door
- For blind corner door thickness of 14-22mm
- Cup diameter : 35mm
- Cup depth : 11.5mm
- Closing degree : 135°
- Hinge arm material : steel / zinc alloy , nickel plated
- Hinge cup material : steel , nickel plated



- Full overlay

Arm installation/Adjustment

Item No.

Slide on

135°

Clip on with cam adjust

135°


Additional Function

Item No.


No damper

ND

Application

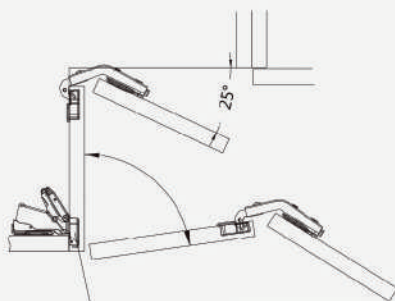

Use for folding door
use with W series 155 degree or 165 degree



Standard package (PCS/CTN)

Hinge body with plate


100

Hinge body without plate


200

Customize package available


Drilling for Cup



B




C



H


Cup Installation



Screw on

Wood screws


Euro screws



Expanding

Ø8mm expansive dowel

Ø10mm expansive dowel



Press in


Ø8mm dowel

Ø10mm dowel

HINGES

HINGES SOFT CLOSE

Soft closing function integrated on concealed hydraulic cabinet hinge plays an important role in closing process of cupboard door, to help it close gently and avoids making sound.

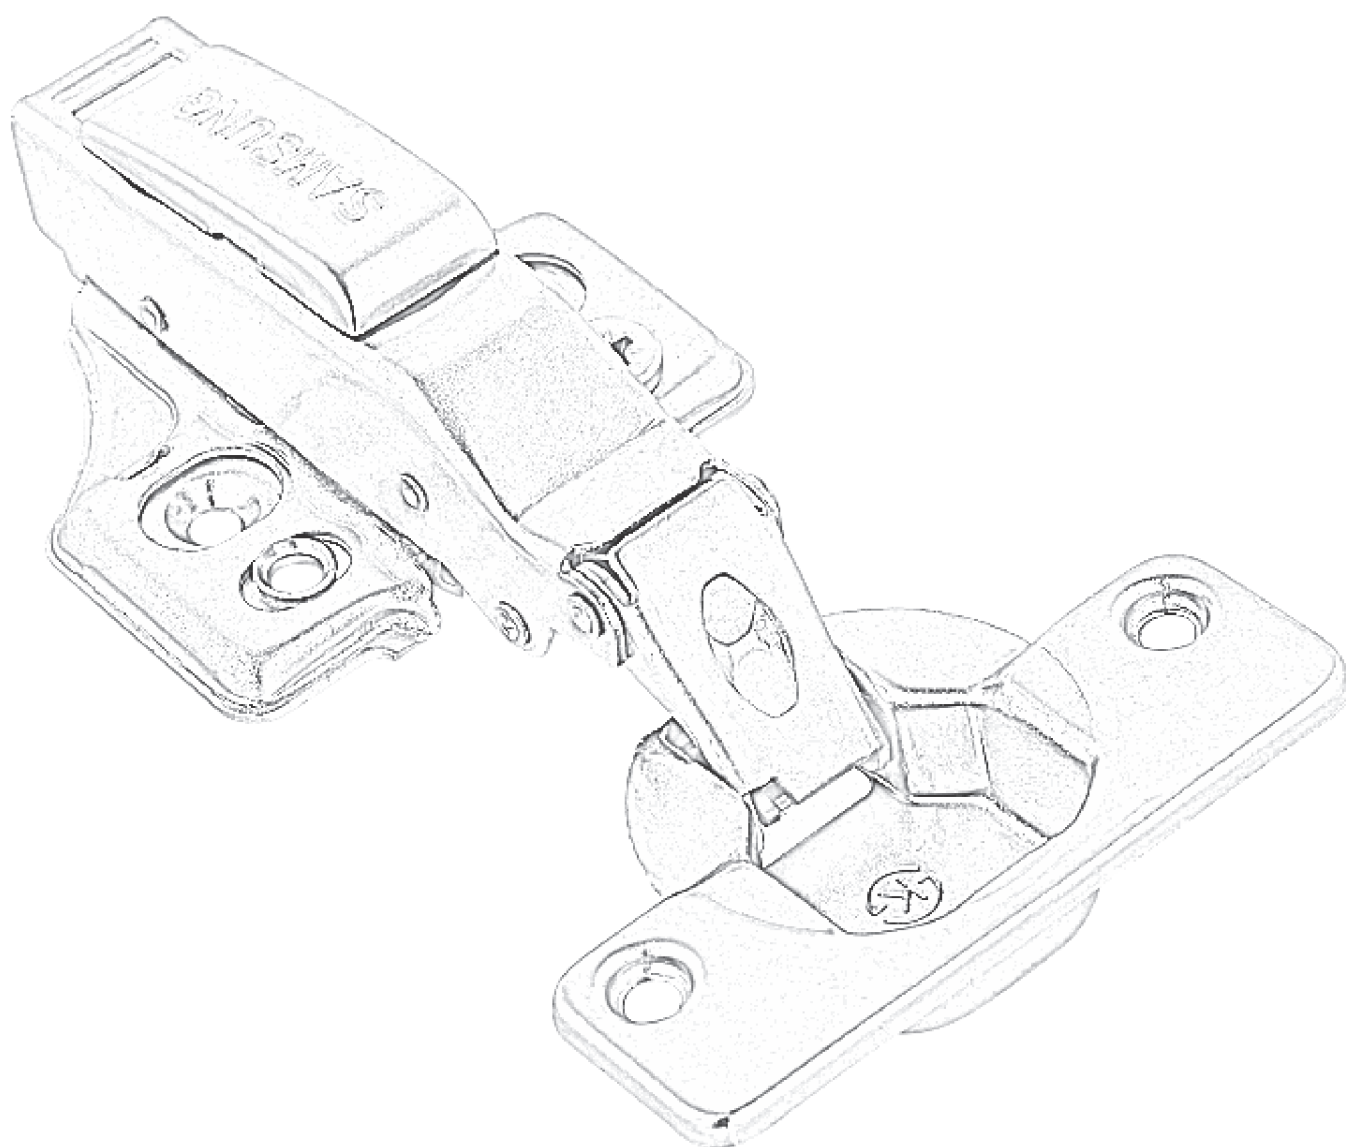

HINGES

575 SERIES



1011575 | Full Overlay - 0 Crank




1011576 | Half Overlay - 9 Crank



1011577 | Inset - 18 Crank

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1011575	Full Overlay - 0 Crank	1	Pair	50
1011576	Half Overlay - 9 Crank	1	Pair	50
1011577	Inset - 18 Crank	1	Pair	50

SOFT-CLOSING HINGE (CLIP ON) OPENING ANGLE 110°

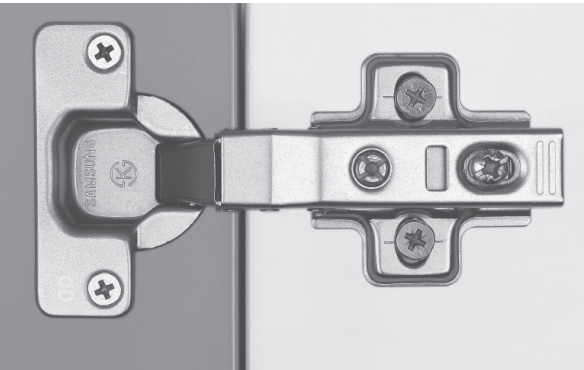

Metal hinge







Nickel plated

Opening angle 110°

Self-closing with spring (Standard type)

3-Dimensional adjustment
(with relevant mounting plate)

Dampner integrated in the hinges body

CUP DIMENSION	45 / 9.5	48 / 6	52 / 5.5
			
CUP SPACING	45 / 9.5	48 / 6	52 / 5.5
	Item No 575DSB	Item No 575DSC	Item No 575DSH
Full Overlay Cranking 0mm			
	Item No 576DSB	Item No 576DSC	Item No 576DSH
Half Overlay Cranking 9mm			
	Item No 577DSB	Item No 577DSC	Item No 577DSH
Inset Cranking 18mm			

775 SERIES



1010775 | Full Overlay- 0 Crank




1010776 | Half Overlay - 9 Crank



1010777 | Inset - 18 Crank

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1010775	Full Overlay - 0 Crank	1	Pair	50
1010776	Half Overlay - 9 Crank	1	Pair	50
1010777	Inset - 18 Crank	1	Pair	50

SOFT-CLOSING HINGE (CLIP ON) OPENING ANGLE 110°

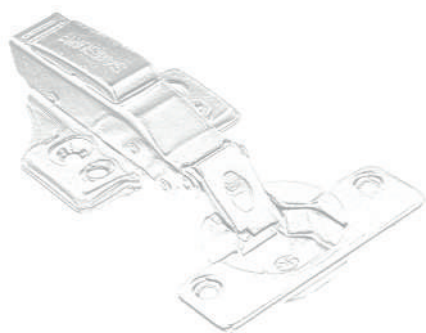

Opening angle 110°
Self-closing with spring (Standard type)
3-Dimensional adjustment
(with relevant mounting plate)
Suitable for cam mounting plates
Dampner integrated in the hinges body

CUP DIMENSION	45 / 9.5	48 / 6	52 / 5.5
CUP SPACING	45 / 9.5	48 / 6	52 / 5.5
	Item No 775DSB	Item No 775DSC	Item No 775DSH
Full Overlay Cranking 0mm			
	Item No 776DSB	Item No 776DSC	Item No 776DSH
Half Overlay Cranking 9mm			
	Item No 777DSB	Item No 777DSC	Item No 777DSH
Inset Cranking 18mm			

THICK DOOR HINGE (40 mm) SOFT CLOSE



1011775 | Full Overlay- 0 Crank



1011776 | Half Overlay - 9 Crank



1011777 | Inset - 18 Crank

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1011775	Full Overlay - 0 Crank	1	Pair	50
1011776	Half Overlay - 9 Crank	1	Pair	50
1011777	Inset - 18 Crank	1	Pair	50

THICK DOOR HINGE (40 mm) SOFT CLOSE




OPENING ANGLE 95°



- Opening angle 95°
- Self-closing with spring (Standard type)
- 3-Dimensional adjustment (with relevant mounting plate)
- Suitable for cam mounting plates
- Dampner integrated in the hinges body

H=Height of mounting plate
D=Distance by which the door over the side board
K=Distance between edge of door and edge of cup hole
A=Reveal between door and side board

- CA: one way closing
- CL: two way closing
- cold rolled steel

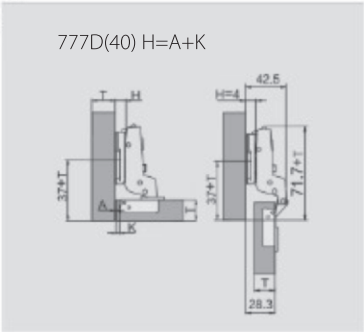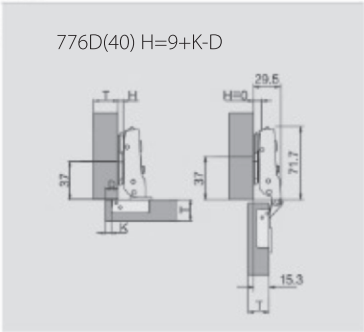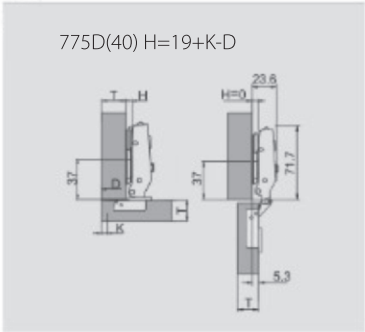

D overlay, A Reveal Calculation Table

Cranking: 0mm						
D	H	K	3	4	5	- 15
0			22	23	24	- 34
2			20	21	22	- 32
4			18	19	20	- 30

Cranking: 10mm						
D	H	K	3	4	5	- 15
0			12	13	14	- 24
2			10	11	12	- 22
4			8	9	10	- 20

Cranking: 19mm						
A	H	K	3	4	5	6 7
4			1	0	-1	-2 -3

855 SERIES



1010855 | Full Overlay - 0 Crank


ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1010855	Full Overlay - 0 Crank	1	Pair	50



WIDE ANGLE SOFT-CLOSING HINGE

(CLIP ON)

OPENING ANGLE 165°

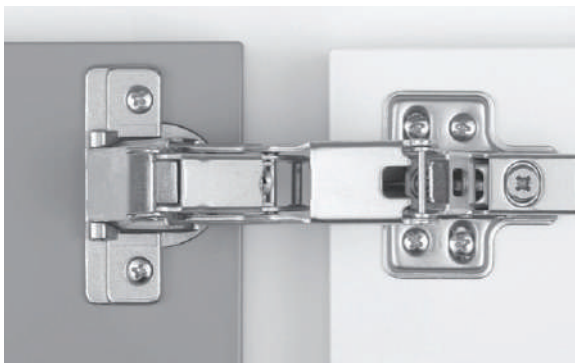

Metal hinge





Nickel plated

Opening angle 165°

Self-closing with spring (Standard type)

3-Dimensional adjustment
(with relevant mounting plate)

Dampner integrated in the hinges body

CUP DIMENSION	45 / 9.5	48 / 6	52 / 5.5
			
CUP SPACING	45 / 9.5	48 / 6	52 / 5.5
	<div>Item No</div> <div>855DSB</div>	<div>Item No</div> <div>855DSC</div>	<div>Item No</div> <div>855DSH</div>
Full Overlay Cranking 0mm			

595 SERIES



1010595 | Full Overlay - 0 Crank

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1010595	Full Overlay - 0 Crank	1	Pair	50

90° BLIND CORNER HINGE

Products overview



Technical Specification

- Concealed hinge clip on with integrated silent system
- For blind corner door thickness of 14-22mm
- Cup diameter : 35mm
- Cup depth : 11.5mm
- Closed degree : 90°
- Hinge arm material : steel , nickel plated / zinc
- Hinge cup material : steel , nickel plated



- Full overlay



Arm installation/Adjustment

Clip on zinc arm	slide on
Clip on with cam adjust (steel arm)	clip on
Clip on with cam adjust (zinc arm)	cam

Additional Function

No damper	ND
Push to open	PO

Application

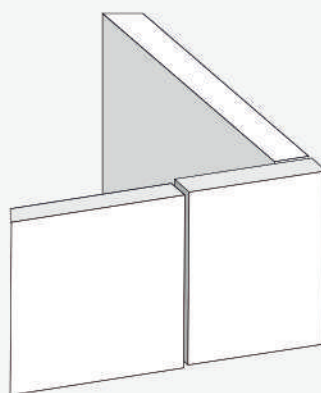

HINGES






Standard package (PCS/CTN)


Hinge body with plate	100
Hinge body without plate	200

Customize package available

Drilling for Cup




Cup Installation

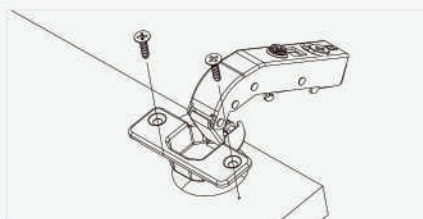


Screw on

Wood screws
Euro screws

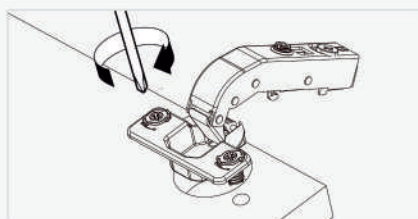

Expanding

Ø8mm expansive dowel
Ø10mm expansive dowel

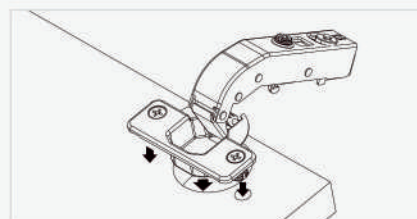

Press in

Ø8mm dowel
Ø10mm dowel

PROFILE HINGE



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1012575	FULL OVERLAY - 0 Crank	1	Pair	50

PROFILE HINGE



Hydraulic hinge
Detachable base
Opening angle:95 °
Aluminum profile specifications:19-25mm
Main material:Cold-rolled steel
Finish:Nickel Plated
Packing:100 or 200 pcs/CTN

PRODUCT ORDERING



775DSFN/0SC




776DSFN/0SC




777DSFN/0SC

INSTALLATION PARAMETERS




D \ V	19	20	21	22	23	24	25
H=0	17	18	19	20	21	22	23
H=2	15	16	17	18			
H=4	13	14	15	16			

Full overlay





D \ V	19	20	21	22
H=0	8	9	10	11
H=2	6	7	8	9
H=4	4	5	6	7

Half overlay



A \ K	3	4	5
H=0	-2.5	-1.5	-0.5

Embed

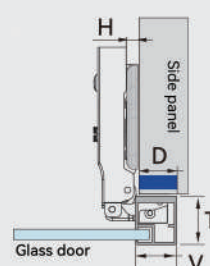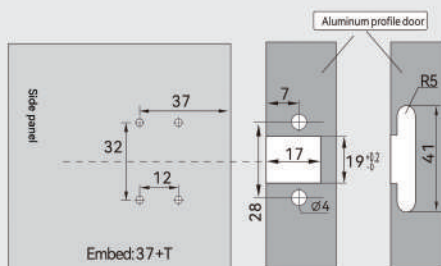

D= Door panel coverage distance

H= Hinge base height

A= Door panel clearance

V= Aluminum profile thickness

T= Aluminum profile thickness

975 SERIES



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1010975	FULL OVERLAY - 0 Crank	1	Pair	50
1010976	HALF OVERLAY - 9 Crank	1	Pair	50
1010977	INSET - 18 Crank	1	Pair	50

SEON HINGE

► INLINE soft close hinge with invisible plate



TECHNICAL SPECIFICATION


- Soft close hinge with clip on LINEAR mounting plate
- 105° opening angle for door thickness of 14-22mm
- Metal material, Cu-nickel/Cu-Black nickel plated
- Integrated steel mini damper soft close system
- Small angle soft close
- 3-dimensional adjustment (with linear mounting plate)
- Easy assembly as well as an attractive design

ARM INSTALLATION /ADJUSTMENT

Full Overlay		Half Overlay		Inset	
Arm installation/Adjustment	Item No.	Arm installation/Adjustment	Item No.	Arm installation/Adjustment	Item No.
Clip on	575DLSHN	Clip on	576DLSHN	Clip on	577DLSHN
Clip on with cam adjust	775DLSHN	Clip on with cam adjust	776DLSHN	Clip on with cam adjust	777DLSHN

HINGES

DRILLING FOR CUP

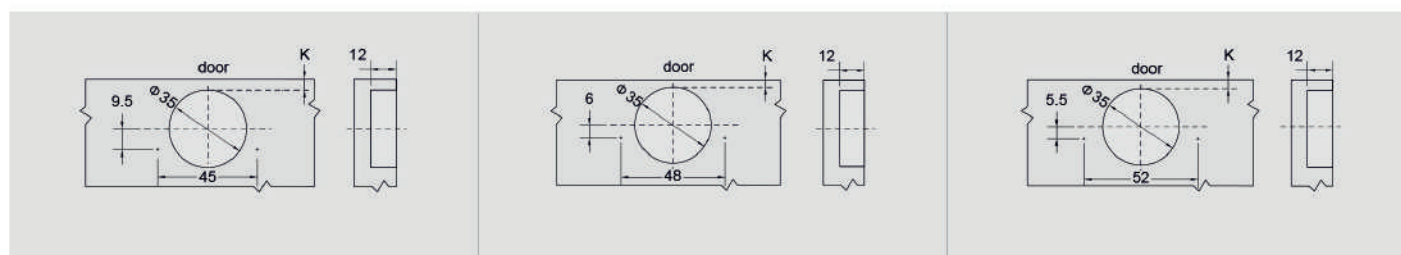

CUP INSTALLATION

Screw on	Expanding	Knock-in	Toolless fast fixed cup
Wood screws	Ø 8mm expansive dowel	Ø 8mm dowel	8mm expanding dowels cover toolless fast fixed cup
Euro screws	Ø 10mm expansive dowel	Ø 10mm dowel	

► INLINE soft close hinge with invisible plate

OVERLAY TABLE

Full Overlay

$$H=14+K-D$$

D	K	3	4	5	6	7
H	0	17	18	19	20	21

Half Overlay

$$H=4+K-D$$




D	K	3	4	5	6	7
H	0	7	8	9	10	11

Inset

$$H=-4+K+A$$

A	K	3	4	5	6	7
H	0	1	0	-1	-2	-3

MOUNTING PLATE INSTALLATION

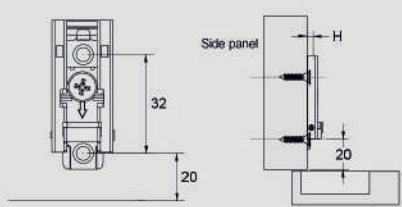 <p>Screw on</p> <p>Wood screws</p>	 <p>Knock-in</p> <p>Ø 8mm dowel</p> <p>Ø 10mm dowel</p>	 <p>Height</p> <p>Item code</p> <p>H=0</p> <p>DC0085</p>
---	---	---

DRILLING DISTANCE ON PANEL

MINIMUM REVEAL TABLE

Side panel

Door

A min

A_K	T	14	15	16	17	18	19	20	21	22
3	0.3	0.5	0.7	0.9	1.2	1.5	1.8	2.2	2.6	
4	0.3	0.5	0.7	0.9	1.1	1.4	1.8	2.1	2.5	
5	0.2	0.4	0.6	0.9	1.1	1.4	1.7	2.0	2.4	
6	0.2	0.4	0.6	0.8	1.1	1.3	1.6	2.0	2.4	
7	0.2	0.4	0.5	0.8	1.0	1.3	1.6	1.9	2.3	

K= Boring distance

T= Door thickness

A=Minimum gap (A) for door with a door edge radius

Side panel

Door




L min

L_K	T	14	15	16	17	18	19	20	21	22
3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
4	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.2
5	1.0	1.0	1.0	1.0	1.0	1.3	1.5	1.8	2.0	
6	1.0	1.3	1.5	1.8	2.0	2.3	2.5	2.8	3.0	
7	2.0	2.3	2.5	2.7	3.0	3.2	3.5	3.7	3.9	

L= Gap between door and panel



Note: above parameter based on the door edge is right-angle side, if the door is round corner edge, the parameter value will be reduce according to the edge size.

HINGE ADJUSTMENT

<p>Depth Adjustment</p> 	<p>Overlay Adjustment</p> 	<p>Height Adjustment</p> 
<p>Rotate depth screw to adjust door gap. Adjust range : 4.8mm (cam screw) 5mm (depth screw)</p>	<p>Rotate lateral screw to increase or decrease door overlay. Adjust range : 6mm</p>	<p>Linear mounting plate height adjust range 4mm</p>

INSTALLATION DIMENSIONS


Hinge dimensions and gap calculation based on factory setting(mounting plate spacing= 0-9mm) Hinge and door protrusion of full opening angle.

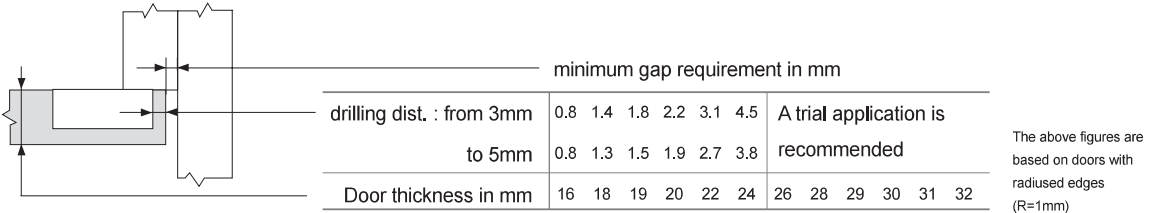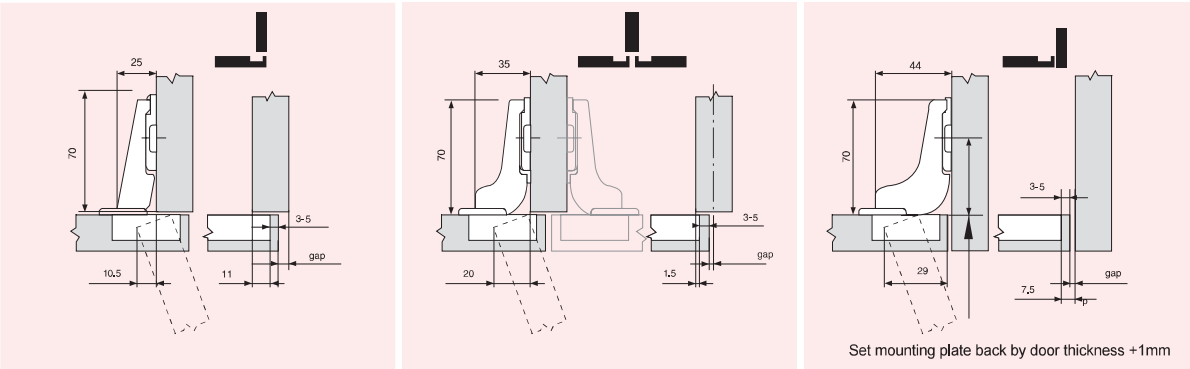


Full Overlay											Half Overlay											Inset										
A											A											A										
11	12	13	14	15	16	17	18	19	H		1.5	2.5	3.5	4.5	5.5	6.5	7.5	8.5	9.5	H		-2.5	-1.5	-0.5	0.5	H						
B											B											B										
3	4	5	6	3	4	5	6	0	3		3	4	5	6	0	3	4	5	6	0		3	4	5	6	0						
3	4	5	6	3	4	5	6	0	3		3	4	5	6	0	3	4	5	6	0		3	4	5	6	0						

A : Door overlay
B : Drilling distance
H : Mounting plate height

Installation

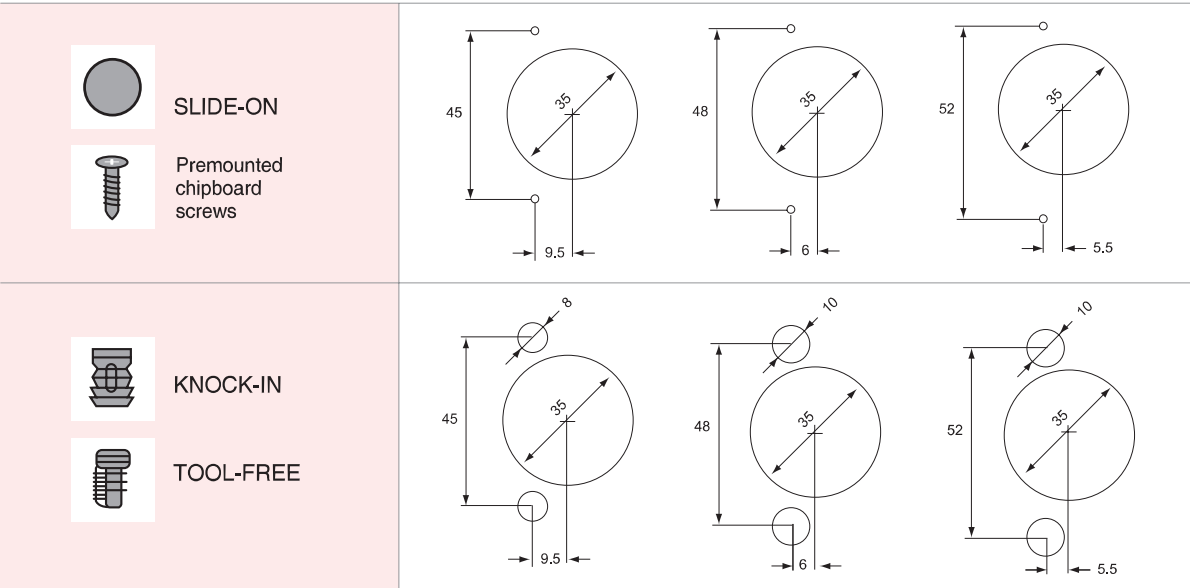

HINGE APPLICATION TABLE

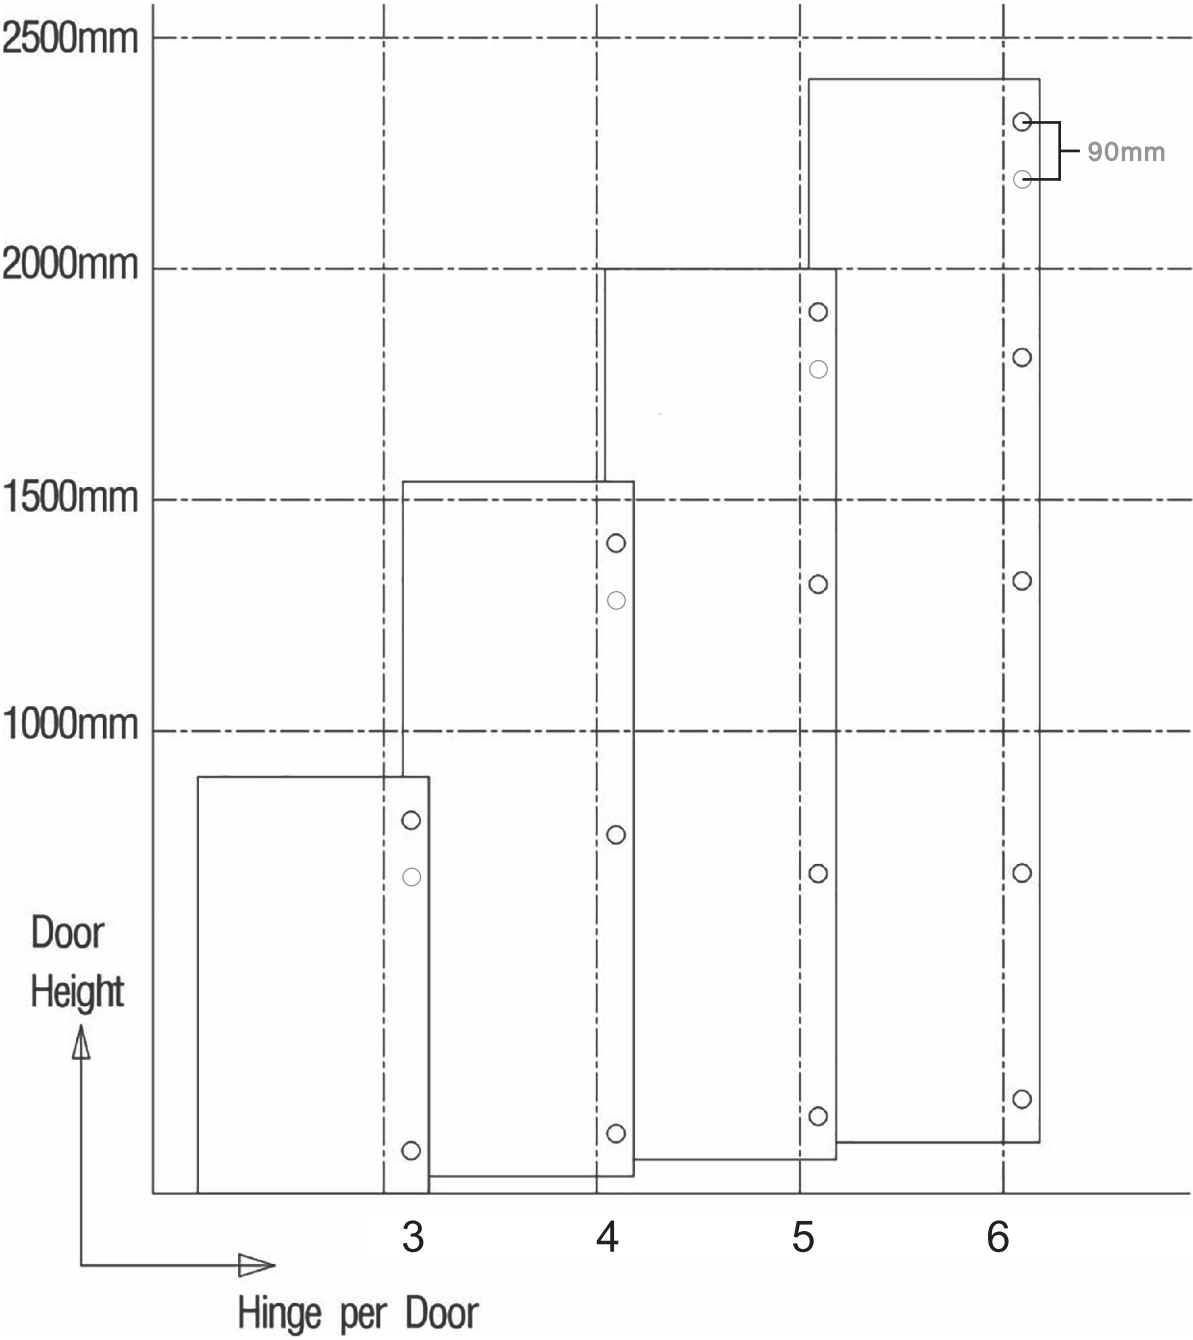

BALL BEARING SLIDE

Ball bearing slides move on a set of stainless steel ball bearings to provide smooth, quiet operation. Ball bearing slides can be purchased with a number of advanced features such as soft-close, push-to-open/close, self-close, and more.

BBS



BALL BEARING SLIDE

ZINC FINISH









ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1020250	Ball Bearing Slide 250mm (N) 45 Kg	1	Set	10
1020300	Ball Bearing Slide 300mm (N) 45 Kg	1	Set	10
1020350	Ball Bearing Slide 350mm (N) 45 Kg	1	Set	10
1020400	Ball Bearing Slide 400mm (N) 45 Kg	1	Set	10
1020450	Ball Bearing Slide 450mm (N) 45 Kg	1	Set	10
1020500	Ball Bearing Slide 500mm (N) 45 Kg	1	Set	10
1020550	Ball Bearing Slide 550mm (N) 45 Kg	1	Set	10
1020600	Ball Bearing Slide 600mm (N) 45 Kg	1	Set	10
1020650	Ball Bearing Slide 650mm (N) 45 Kg	1	Set	10
1020700	Ball Bearing Slide 700mm (N) 45 Kg	1	Set	10
1020750	Ball Bearing Slide 750mm (N) 45 Kg	1	Set	10

INSTALLATION

Size : 250mm~500mm(250mm~550mm)

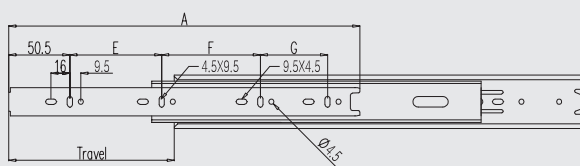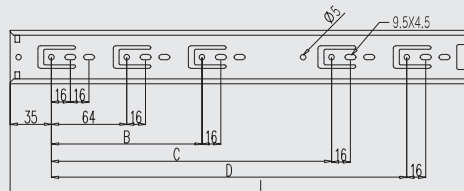


Length	Travel	A	B	C	D	E	F	REMARKS
250 mm	255	247.5	160	-	-	160	-	
300 mm	291	297.5	224	-	-	96	128	
350 mm	341	347.5	-	-	224	128	128	
400 mm	391	397.5	224	-	302	128	160	
450 mm	441	447.5	224	352	-	160	192	
500 mm	491	497.5	224	352	-	192	192	
550 mm	541	547.5	224	352	416	224	224	




BALL BEARING SLIDE

BLACK FINISH

SAMSUNG
IREX



DAMPING BALL BEARING SLIDE

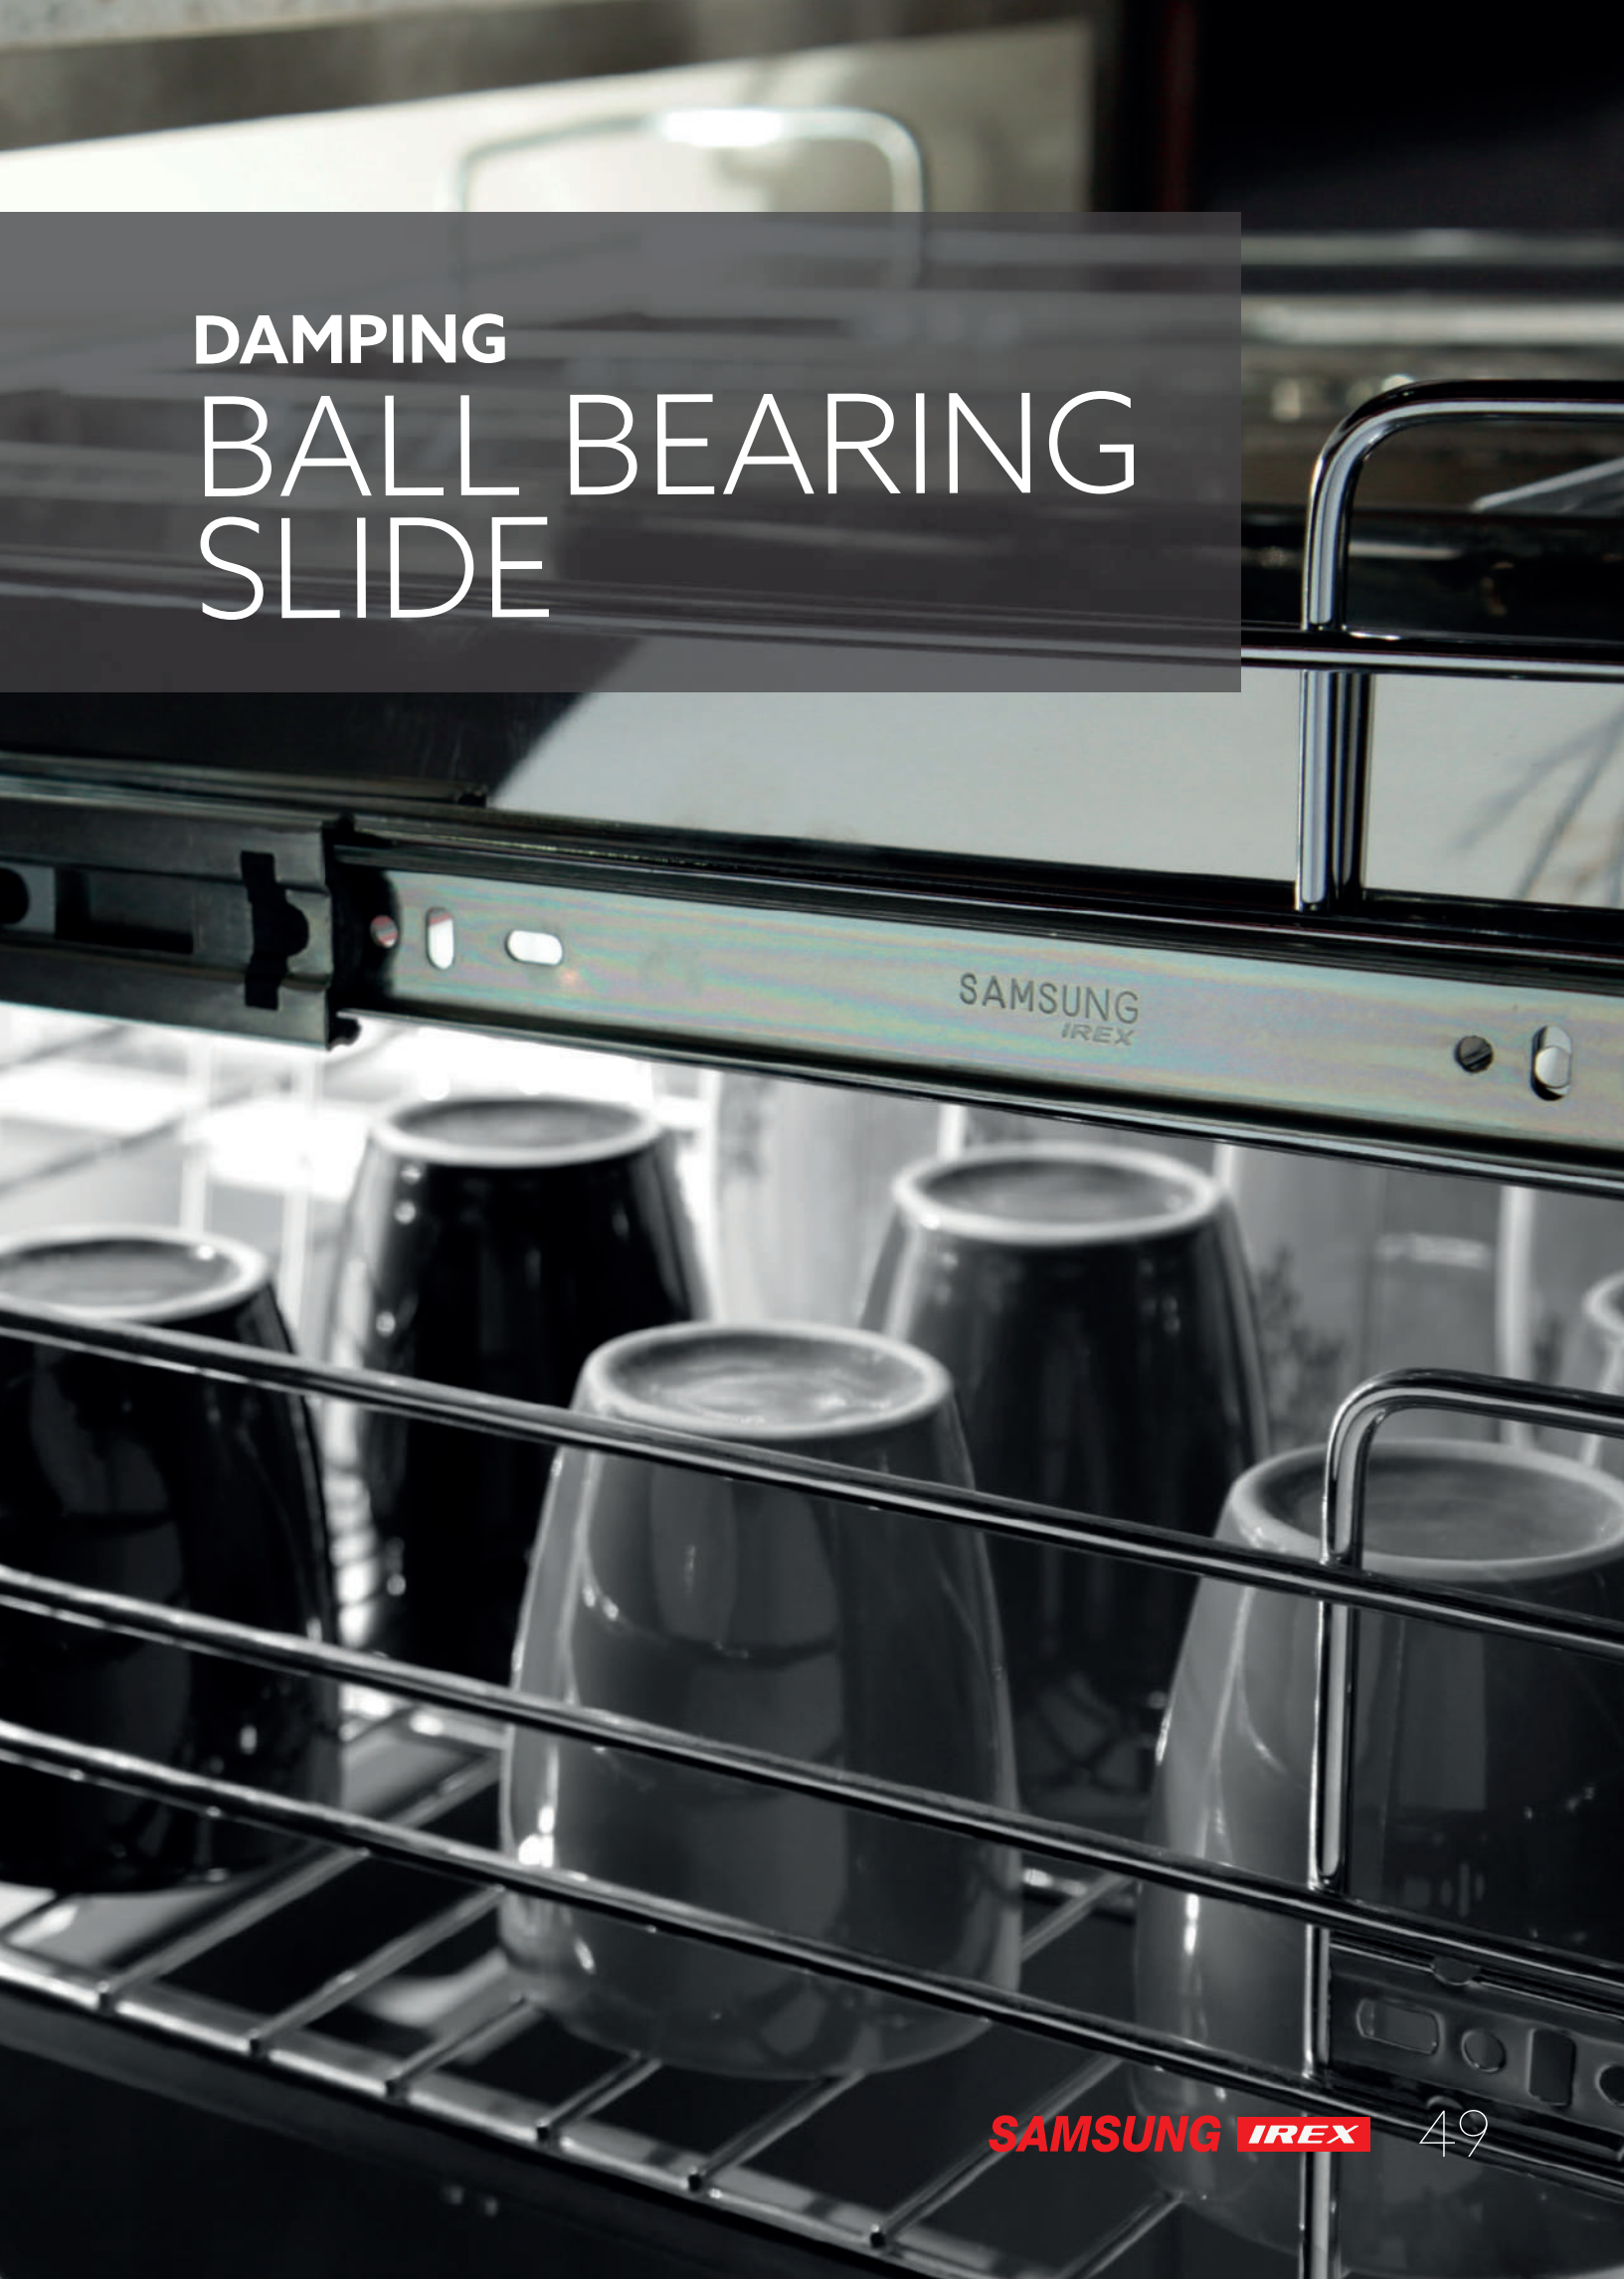







ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1022300	Damping Ball Bearing Slide 300mm (S/C) 40 Kg	1	Set	10
1022350	Damping Ball Bearing Slide 350mm (S/C) 40 Kg	1	Set	10
1022400	Damping Ball Bearing Slide 400mm (S/C) 40 Kg	1	Set	10
1022450	Damping Ball Bearing Slide 450mm (S/C) 40 Kg	1	Set	10
1022500	Damping Ball Bearing Slide 500mm (S/C) 40 Kg	1	Set	10
1022550	Damping Ball Bearing Slide 550mm (S/C) 40 Kg	1	Set	10


INSTALLATION

Size : 300mm~600mm(damping 300mm~600mm) - NEW TYPE

※ Caution – carefully fixing the bolt as of dwg.

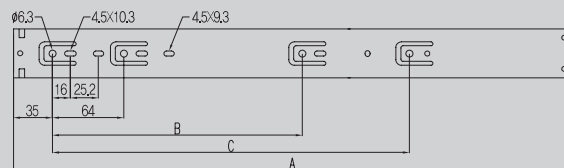

Length	A	Travel	B	C	E	F	REMARKS
300 mm	300	300	-	-	96	96	
350 mm	350	350	160	-	96	96	
400 mm	400	400	224	-	160	128	
450 mm	450	450	224	-	160	160	
500 mm	500	500	224	320	224	160	
550 mm	550	550	224	352	224	192	
600 mm	600	600	224	384	224	224	




DAMPING BBS

P20 BALL BEARING SLIDE



ARTICLE CODE	DESCRIPTION	QTY.		UNIT	PU
1025300	Push to open BBS 300 mm	30 kg	1	Set	10
1025350	Push to open BBS 350 mm	30 kg	1	Set	10
1025400	Push to open BBS 400 mm	30 kg	1	Set	10
1025450	Push to open BBS 450 mm	30 kg	1	Set	10
1025500	Push to open BBS 500 mm	30 kg	1	Set	10

INSTALLATION

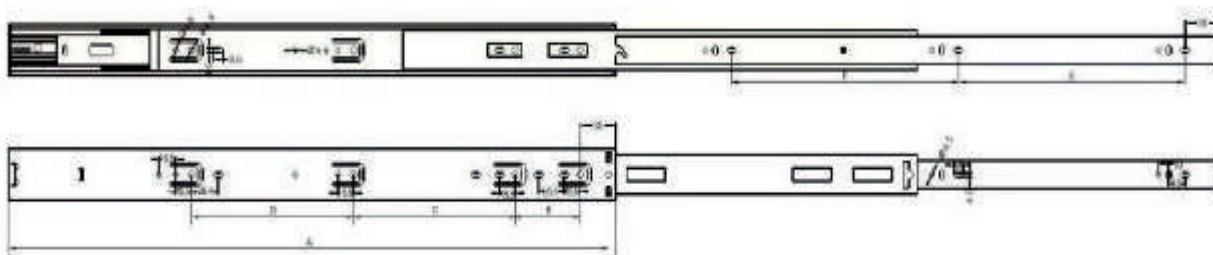

Item.no.	Hole pattern						Packing(set/ctn)
	A	B	C	D	E	F	
SSP-B-300 mm	300	64			96	128	15
SSP-B-350 mm	350	64	96		128	128	15
SSP-B-400 mm	400	64	160		128	160	15
SSP-B-450 mm	450	64	160		160	160	15
SSP-B-500 mm	500	64	160	128	160	224	15
SSP-B-550 mm	550	64	160	128	224	224	15
SSP-B-600 mm	600	64	160	160	224	240	15

P20 BBS

UNDER RAIL

An Under Rail drawer slide, is typically mounted in a horizontal position underneath the chassis of your drawer. They are ideally designed for the area where aesthetics and space issues are paramount. Under rail comes with self cleaning mechanism.



UNDER RAIL



UNDER RAIL

PART EXTENSION

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1024300	Damping Under Rail 300mm (Part Extn.With S/C) 25 Kg	1	Set	8
1024350	Damping Under Rail 350mm (Part Extn.With S/C) 25 Kg	1	Set	8
1024400	Damping Under Rail 400mm (Part Extn.With S/C) 25 Kg	1	Set	8
1024450	Damping Under Rail 450mm (Part Extn.With S/C) 25 Kg	1	Set	8
1024500	Damping Under Rail 500mm (Part Extn.With S/C) 25 Kg	1	Set	8
1024550	Damping Under Rail 550mm (Part Extn.With S/C) 25 Kg	1	Set	8

UNDER RAIL

FULL EXTENSION

UNDER RAIL



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1023250 b	Damping Under Rail 250mm (Full Extn.With S/C) 35 Kg	1	Set	8
1023300 b	Damping Under Rail 300mm (Full Extn.With S/C) 35 Kg	1	Set	8
1023350 b	Damping Under Rail 350mm (Full Extn.With S/C) 35 Kg	1	Set	8
1023400 b	Damping Under Rail 400mm (Full Extn.With S/C) 35 Kg	1	Set	8
1023450 b	Damping Under Rail 450mm (Full Extn.With S/C) 35 Kg	1	Set	8
1023500 b	Damping Under Rail 500mm (Full Extn.With S/C) 35 Kg	1	Set	8

IREX UNDER RAIL




- Load capacity: 35kg
- Perfect height and stability at side can guarantee excellent running condition of the slides
- Soft-closing function make the drawer close safely without effect of weight
- Push type installation, Put drawer on slides horizontally, push it closed, then assembling is finished
- With height-adjustment function, the gap between drawer bottom and slides can be adjusted by rotating the blue plastic wheel
- Tool-free, quick installation
- With soft close function

Hole pattern

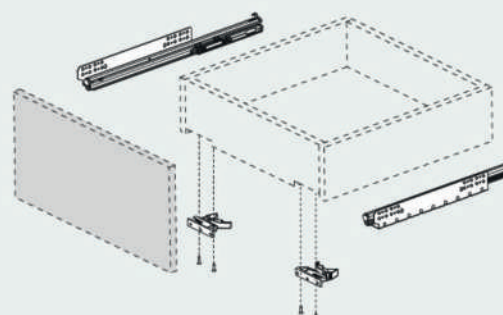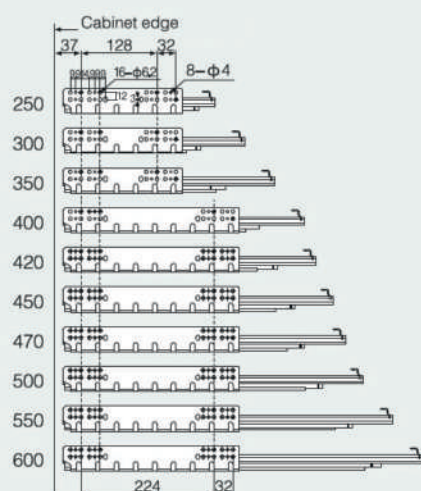

UNDER RAIL

Nominal length NL (mm)	Travel length (mm)	Min cabinet depth (Standard / Inner) LT (mm)	Packing (Set/Box)
250	234	265 / 265+X	10
300	284	315 / 315+X	10
350	334	365 / 365+X	10
400	384	415 / 415+X	10
420	404	435 / 435+X	10
450	434	465 / 465+X	10
470	454	485 / 485+X	10
500	484	515 / 515+X	10
550	534	565 / 565+X	10
600	584	615 / 615+X	10




Space required	Drawer installation	Standard drawer
	<p>SKW: Drawer width LW: Inside net width</p>	<p>NL: Nominal length SKL: Length of drawer LT: Min cabinet depth</p> <p>Inner drawer</p> <p>NL: Nominal length SKL: Length of drawer LT: Min cabinet depth X: Thickness of the front panel</p>
Hole size on rear panel of the drawer	Installation of the locking device	
Installation of the drawer	Adjustment and removal of the drawer	
<p>Fully open the slides and put the drawer on it, then push into cabinet horizontally, the drawer can be installed.</p>	<p>The drawer may be adjusted in height for +2mm by rotating the adjustable plastic.</p> <p>Hold the plastic gently according to the direction of the arrow when removing the drawer, then the drawer can be demounted easily.</p>	

IREX BOX

Drawer system having a soft close integrated mechanism which helps the drawer to close in a soft manner ensuring soundless operations. The mechanism is based upon rack and pinion along with ball bearing mechanism, which ensures smooth opening and closing of drawer.

Irex box comes with the option of extending the height of drawer by adding gallery. The product offers ranges of irex box as without gallery, single gallery and double gallery with the weight capacity of 40kg and available in depth sizes of 350mm, 400mm, 450mm, 500mm and 550mm.

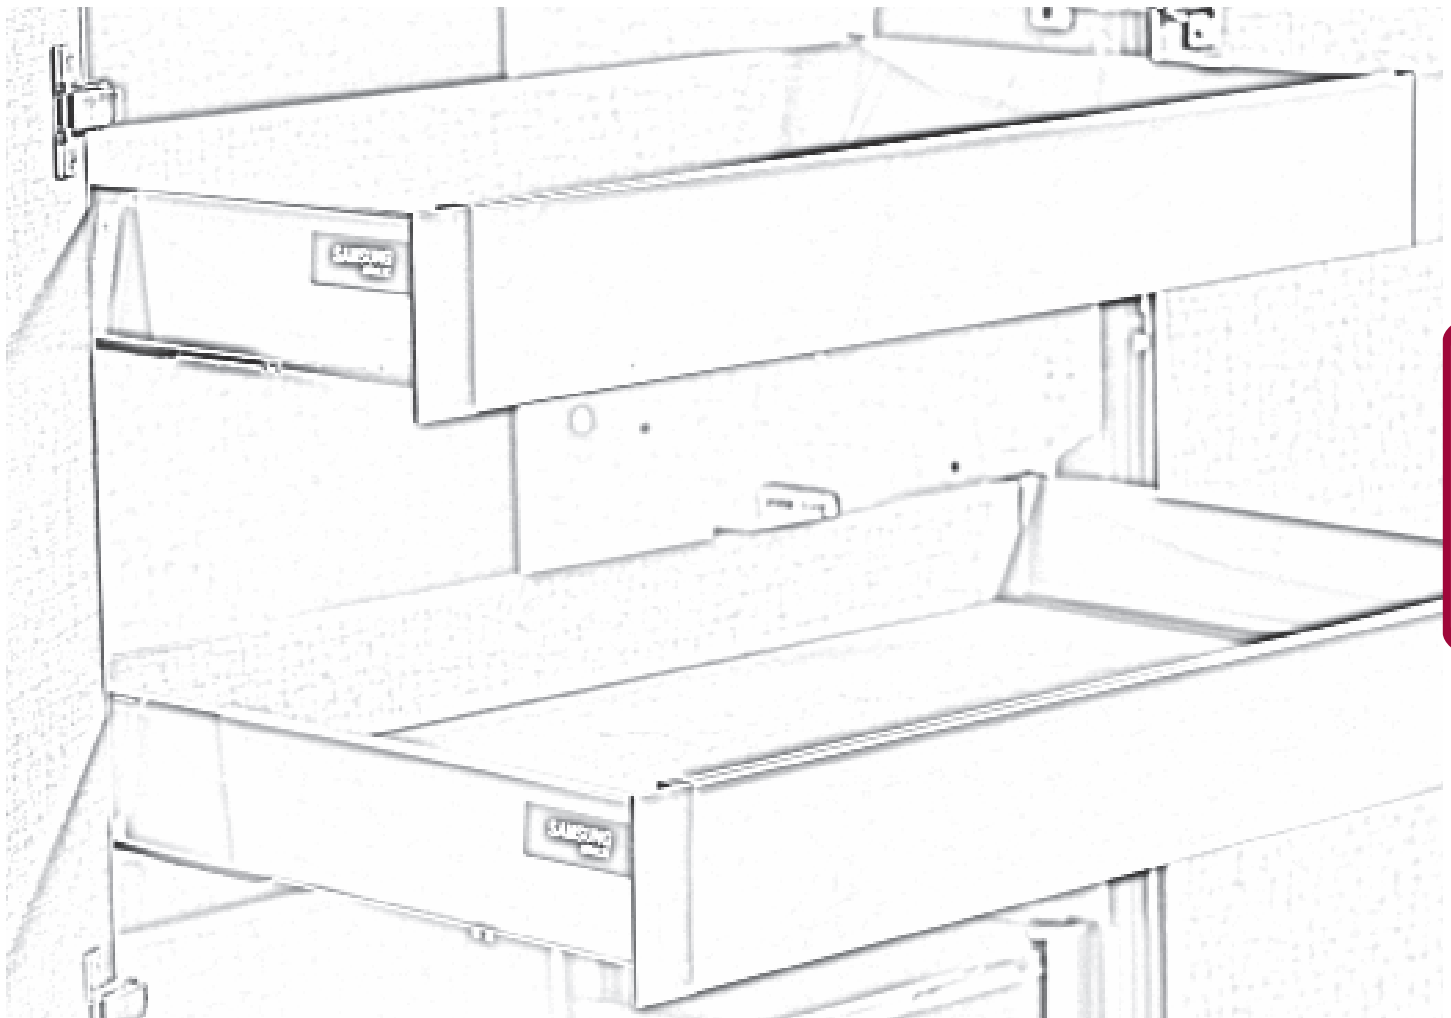


DRAWER SYSTEM

IREX BOX

W/O GALLERY



SAMSUNG
ARREX

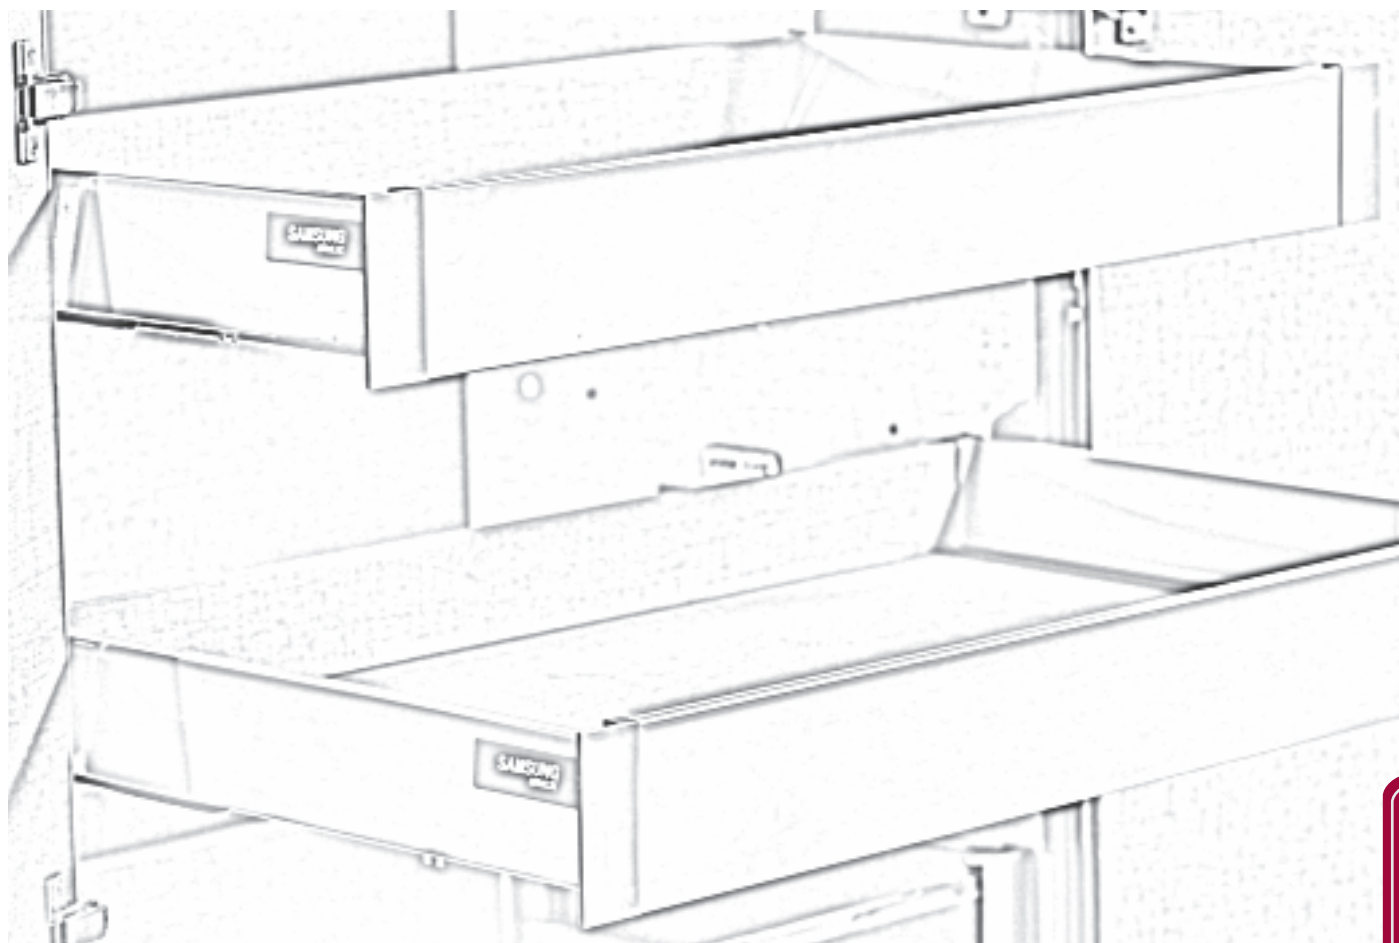


DRAWER SYSTEM

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1030350	Irex Box 350 mm 40 Kg	1	Set	4
1030400	Irex Box 400 mm 40 Kg	1	Set	4
1030450	Irex Box 450 mm 40 Kg	1	Set	4
1030500	Irex Box 500 mm 40 Kg	1	Set	4
1030550	Irex Box 550 mm 40 Kg	1	Set	4

IREX BOX

SINGLE GALLERY



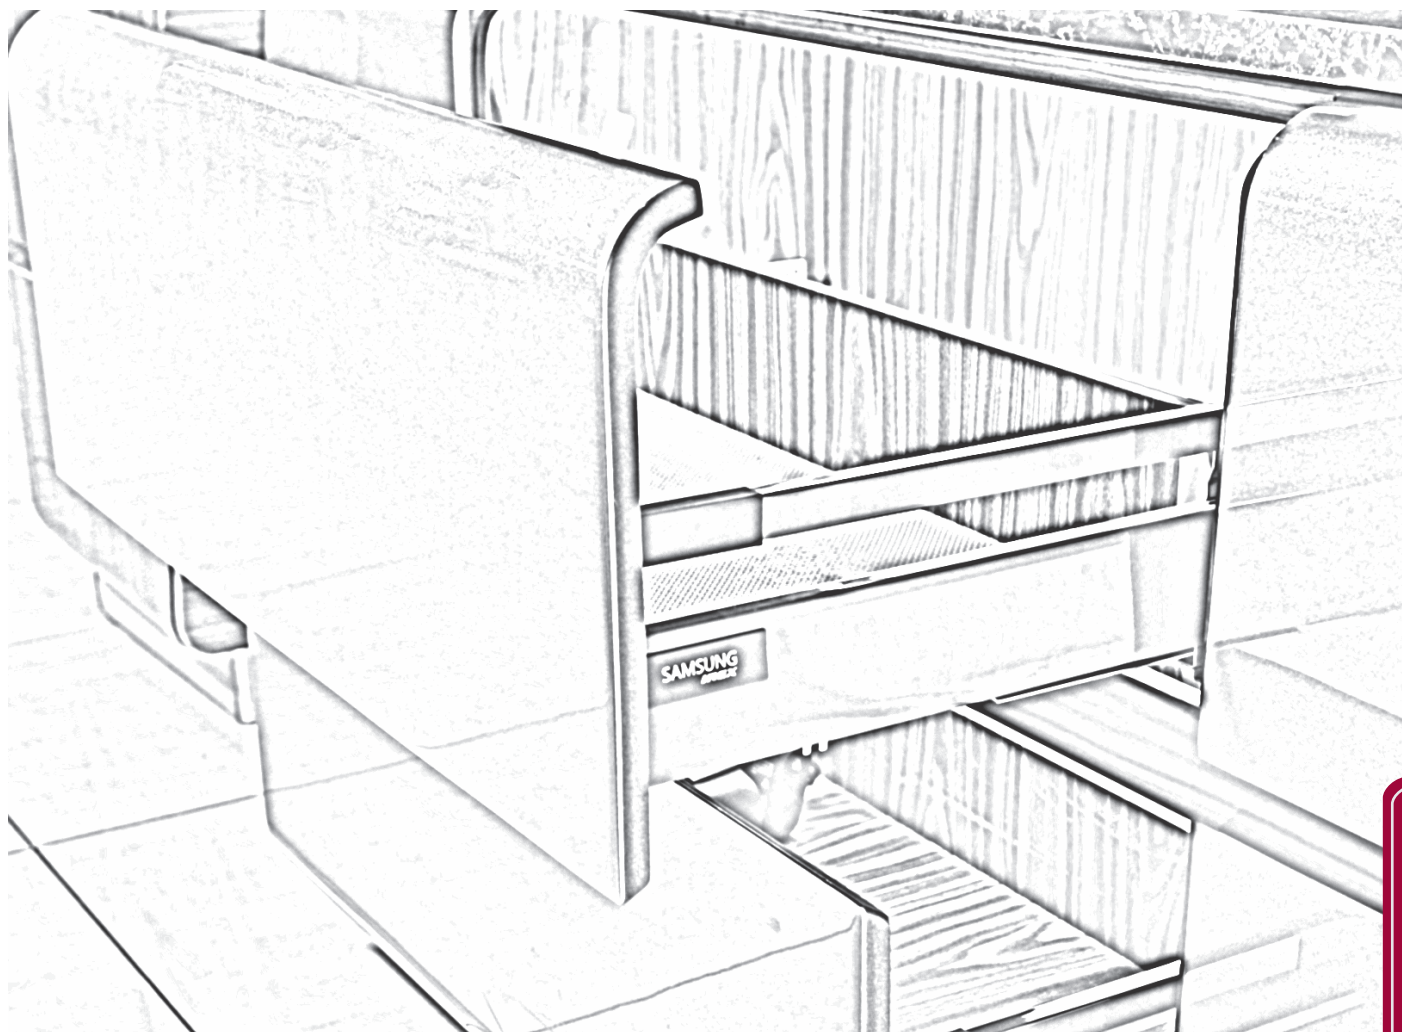


DRAWER SYSTEM

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1031350	Irex Box With Gallery 350mm 40 Kg	1	Set	4
1031400	Irex Box With Gallery 400mm 40 Kg	1	Set	4
1031450	Irex Box With Gallery 450mm 40 Kg	1	Set	4
1031500	Irex Box With Gallery 500mm 40 Kg	1	Set	4
1031550	Irex Box With Gallery 550mm 40 Kg	1	Set	4

IREX BOX

DOUBLE GALLERY

SAMSUNG
IREX

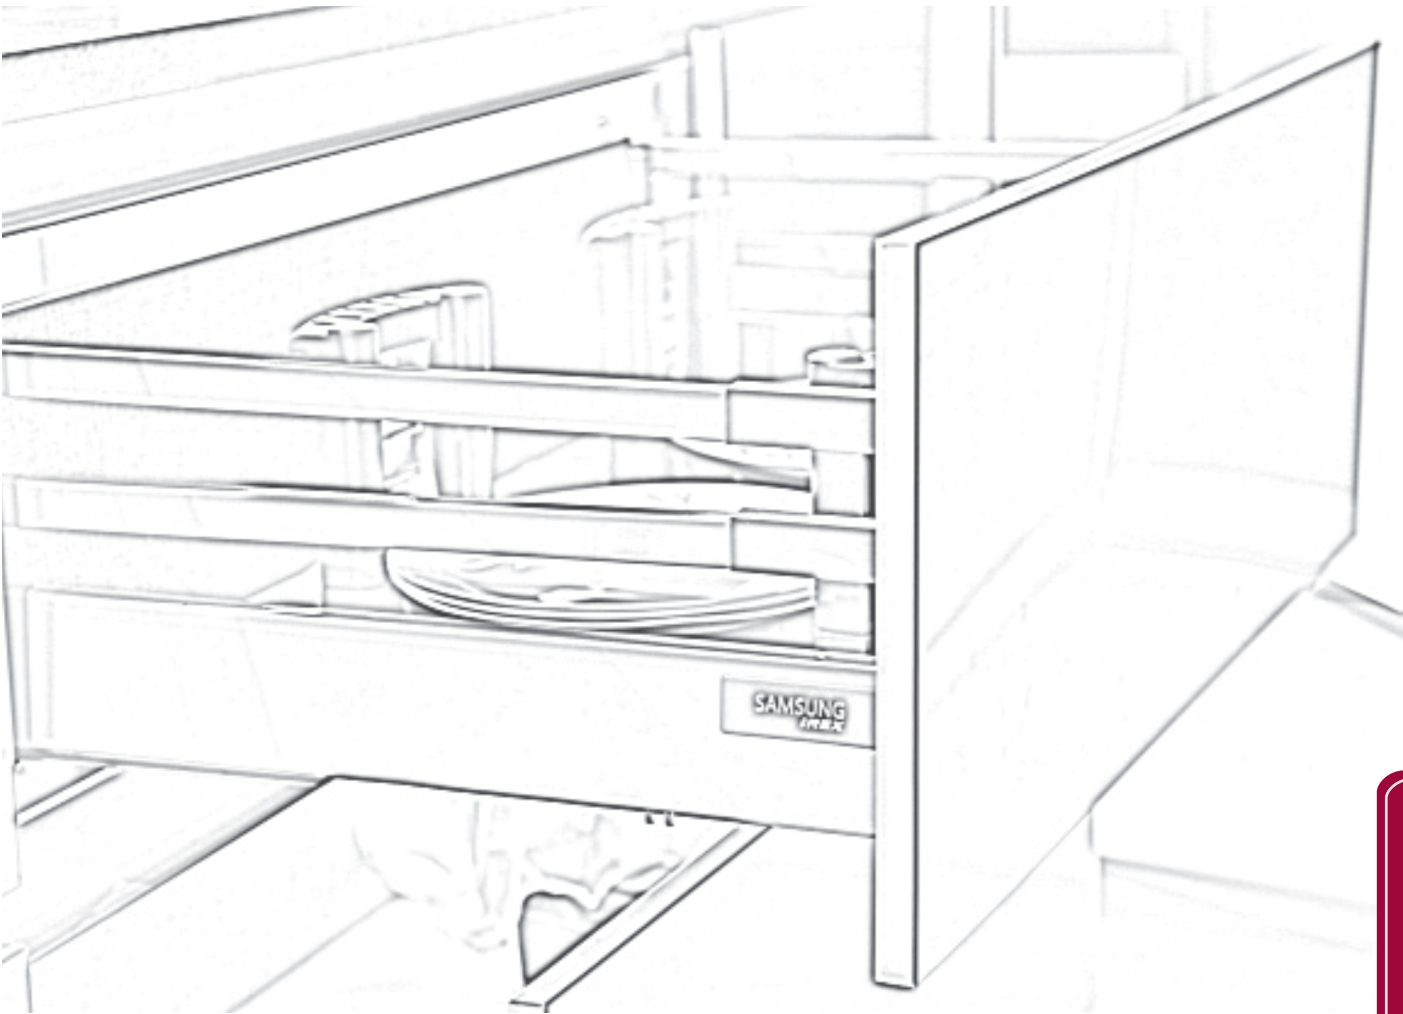


DRAWER SYSTEM


ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1032500	Irex Box With Double Gallery 500mm 40 Kg	1	Set	4
1032550	Irex Box With Double Gallery 550mm 40 Kg	1	Set	4

Cutting


1. Foundation size



2. Back plate (In, Drawer)



3. Back plate (Gallery)




* Front plate for In box : Inner shell - 85

Item name	Cutting Dimension (basis :500mm , outer dimension)	
	600mm	1000mm
Base plate (15 T standard)	495(W) x 492(D)	895(W) x 492(D)
Back plate (15 T standard)	Drawer	483(W) x 70(D)
	Gallery	483(W) x 120(D)


** Install the drawer on the rail from 1mm higher position.




Drawer's diagram

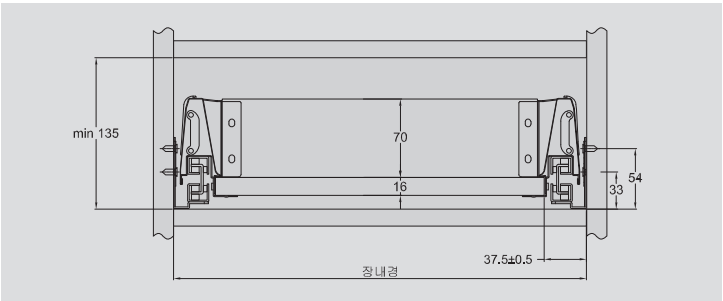


Location of side plate mounting (In box)

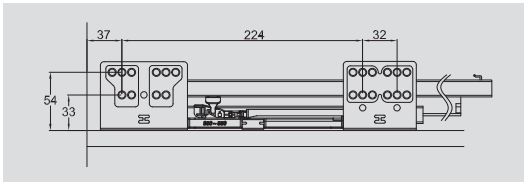


Drawer's diagram

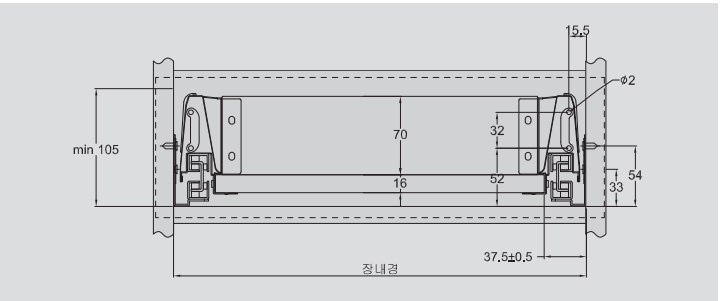


Location of side plate mounting (Drawer)

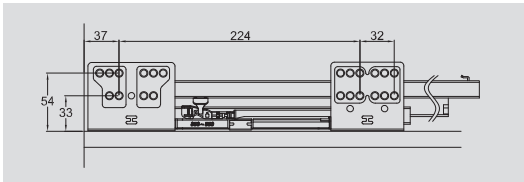



Drawer's diagram

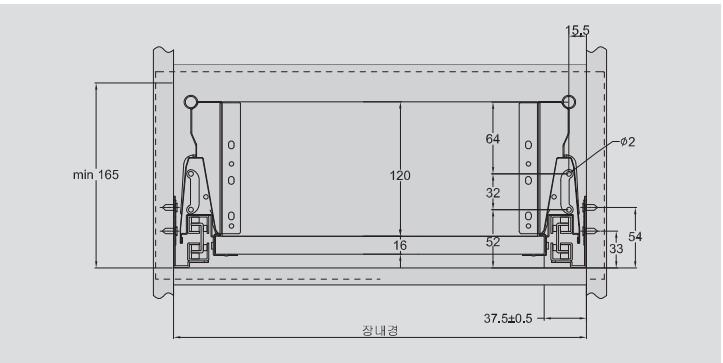



Location of side plate mounting (Gallery)

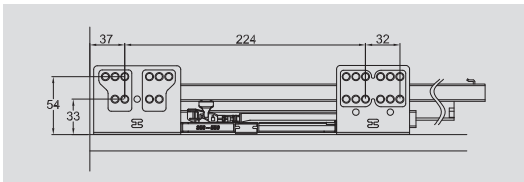



FRONT PANEL BRACKET INSTALLATION

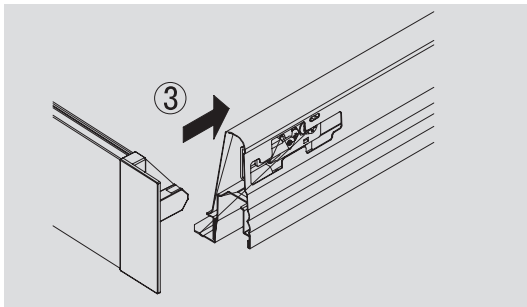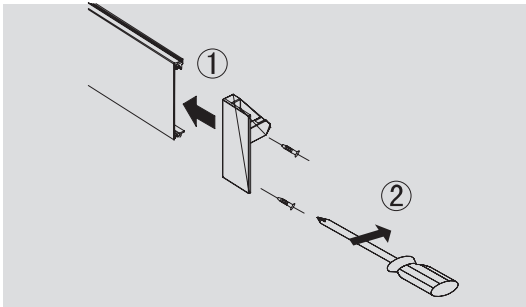




FRONT PANEL ASSEMBLE AND DISASSEMBLE INSTALLATION

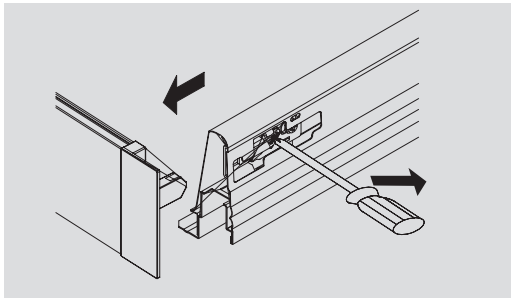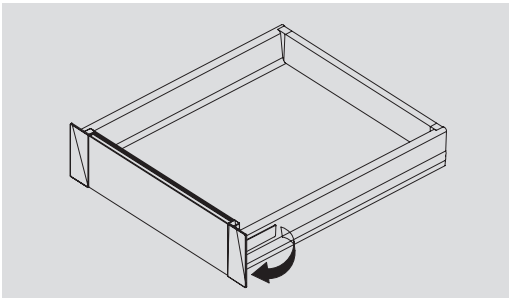

FRONT PANEL ADJUSTMENT UP/DOWN +/- 2MM, L/R +/- 2MM

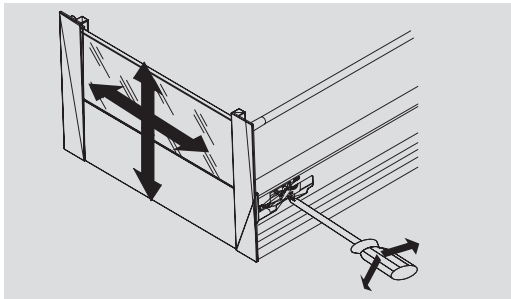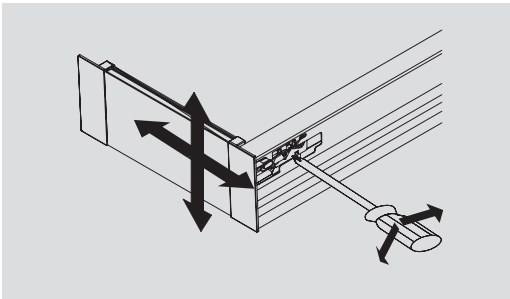

FRONT PANEL ADJUSTMENT UP/DOWN +/- 2MM, L/R +/- 2MM

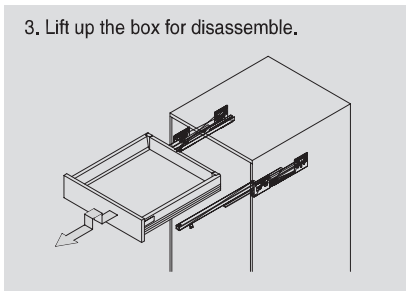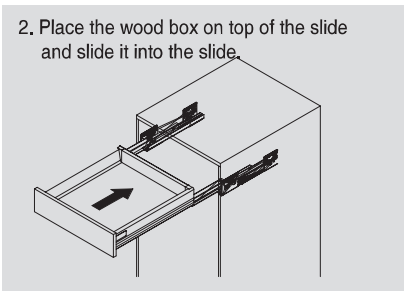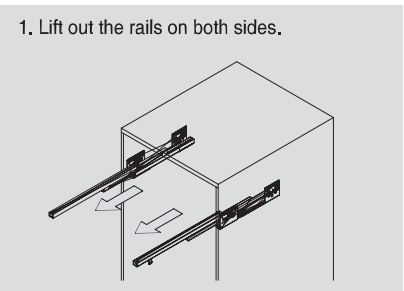

HANA BOX

Drawer system comes with slim side profile in multiple extended heights of 90mm, 120mm and 185mm with soft closing mechanism. Having a slim side profile makes the kitchen cabinet drawer more sleek, steady with underrail mechanism and thus enhance the aesthetic of the complete kitchen cabinet. Hana box comes in two colour options of white and grey slim side profiles, which in result offers option to the end customer for selection..

Hana box offers 40kg weight carrying capacity with depth of 500mm, which ensures the maximum storage and at the same time offers more ease in closing and opening of the drawer.






DRAWER SYSTEM

HANA BOX

SAMSUNG
INEX

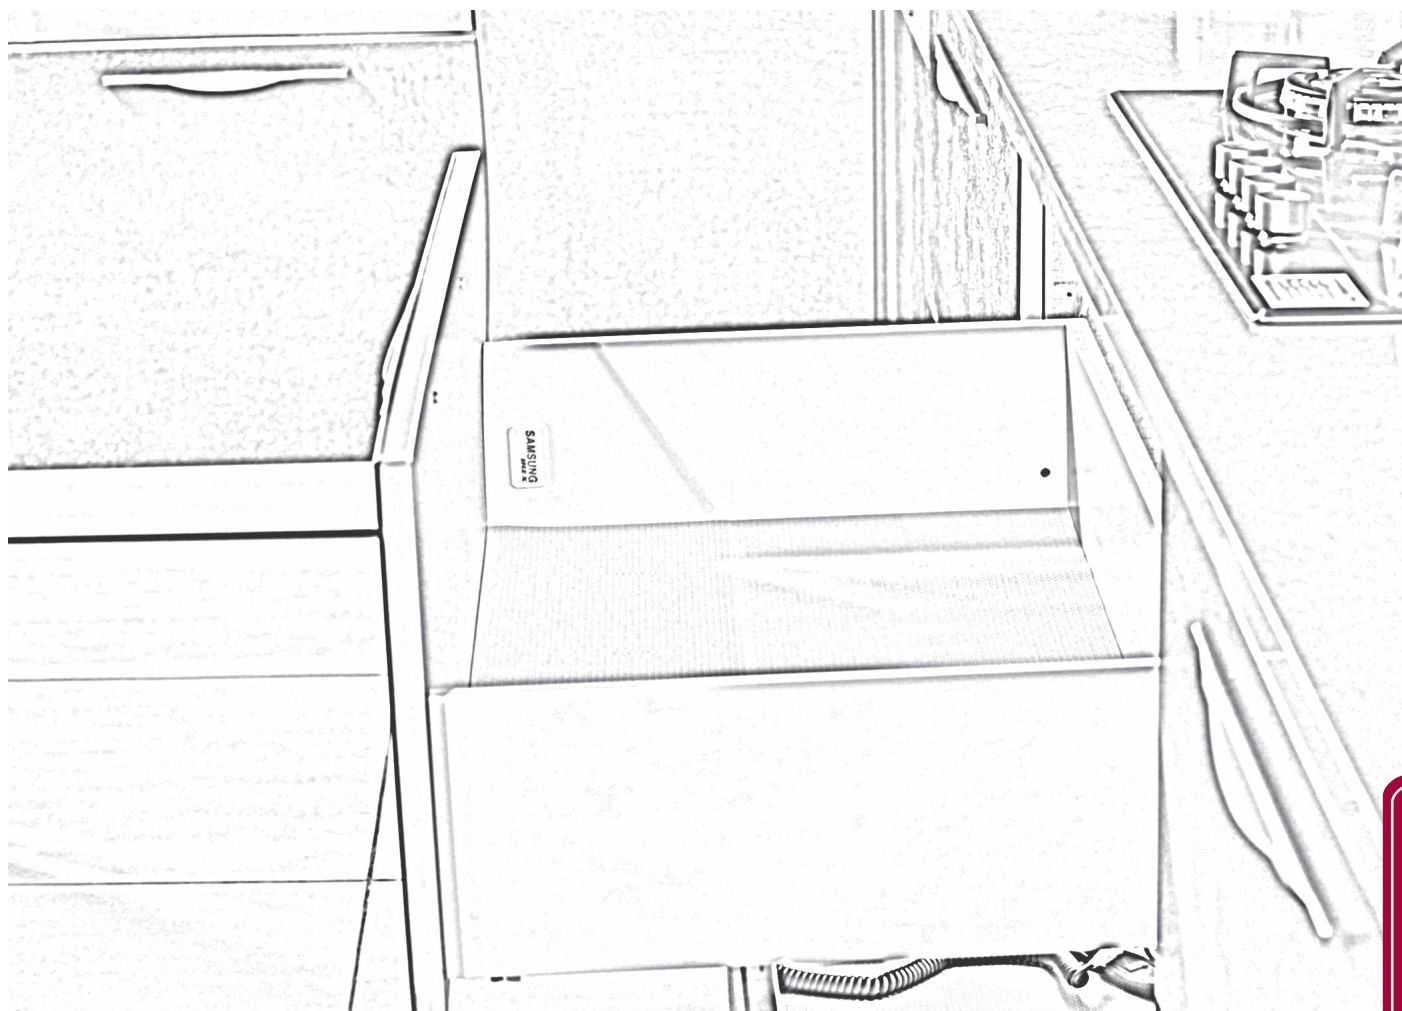


DRAWER SYSTEM

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1033000	Hana Box J Height- 90mm (Grey) 40 Kg	1	Set	4
1033001	Hana Box H Height- 120mm (Grey) 40 Kg	1	Set	4
1033002	Hana Box D Height- 185mm (Grey) 40 Kg	1	Set	4
1033006	Hana Box S Height- 250mm (Grey) 40 Kg	1	Set	4

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1033003	Hana Box J Height- 90mm (White) 40 Kg	1	Set	4
1033004	Hana Box H Height- 120mm (White) 40 Kg	1	Set	4
1033005	Hana Box D Height- 185mm (White) 40 Kg	1	Set	4

***Available In 450,550 mm Depth In Grey Finish**





Components

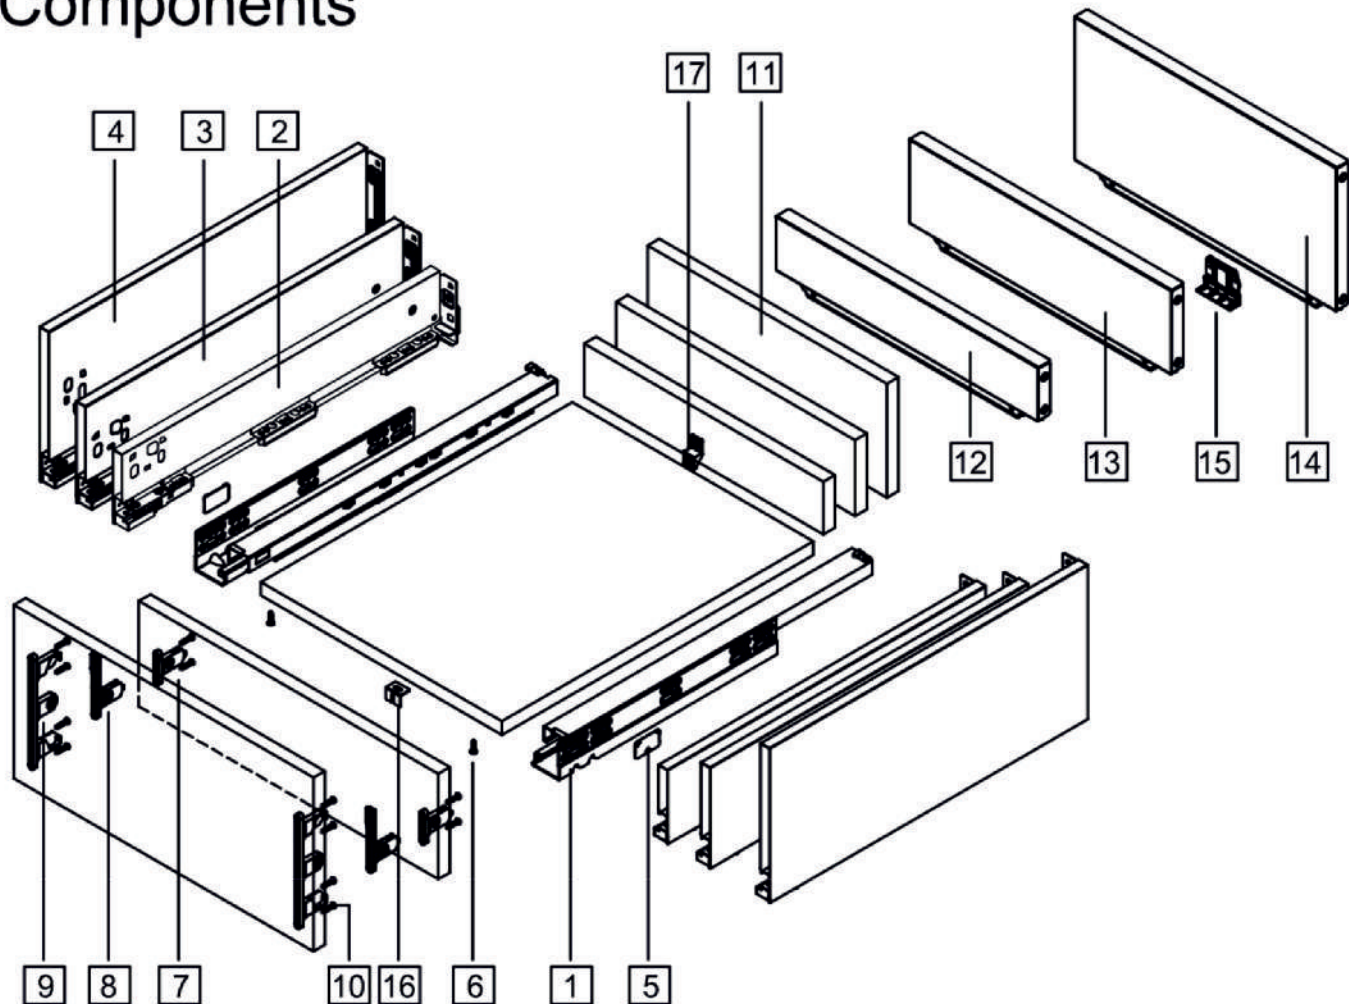

1.Cabinet profiles: L/R	10. Front fixing-brackets screw (Ø4x17)
2.89 Drawer profiles: L/R	11. Drawer back
3.121 Drawer profiles: L/R	12. Metal back height 89
4.185 Drawer profiles: L/R	13. Metal back height 121
5.Side cover plate	14. Metal back height 185
6.Bottom screw (Ø3.5x15)	15. Metal back fixed
7.HANA-FFB-89-1 L/R	16. Bottom fixing(for wide drawer)
8.HANA-FFB-121-1 L/R	17. Back fixing(for wide drawer)
9.HANA-FFB-185-1 L/R	


Nominal length	Internal drawer length	Min.installation length of drawer
270mm	244mm	275mm
300mm	274mm	305mm
350mm	324mm	355mm
400mm	374mm	405mm
450mm	424mm	455mm
500mm	474mm	505mm
550mm	524mm	555mm

Drawer Back and Bottom Dimensions

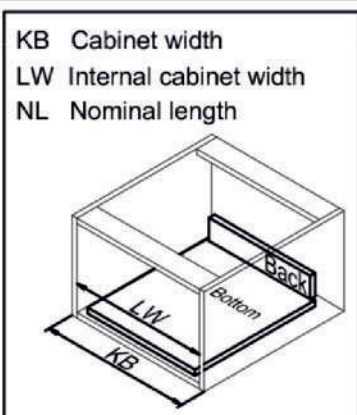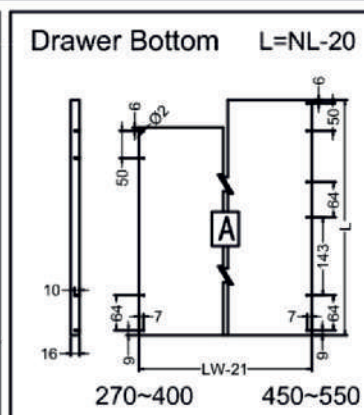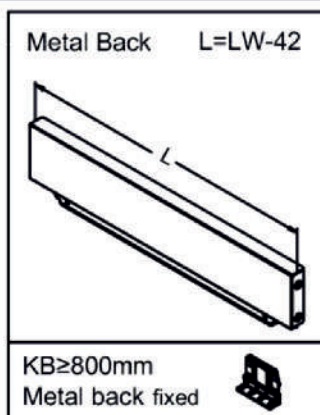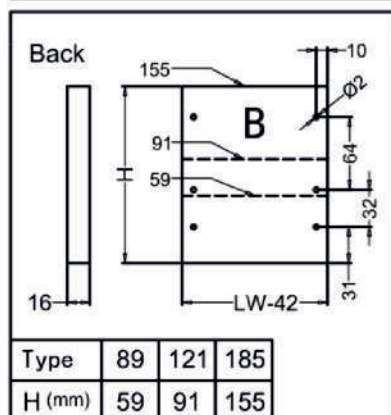


Installation dimensions (mm)


Nominal slide length=NL Internal cabinet depth=LT

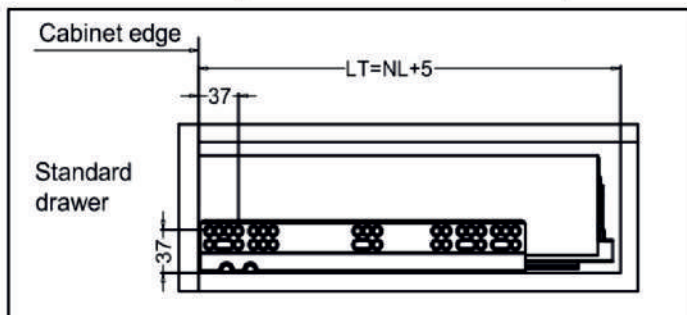

Drawer installation dimensions (mm)



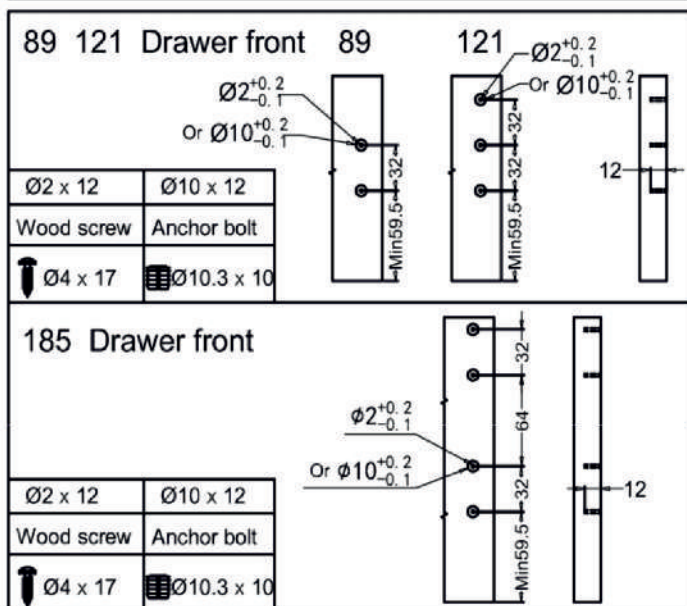


Screw positions of the sides

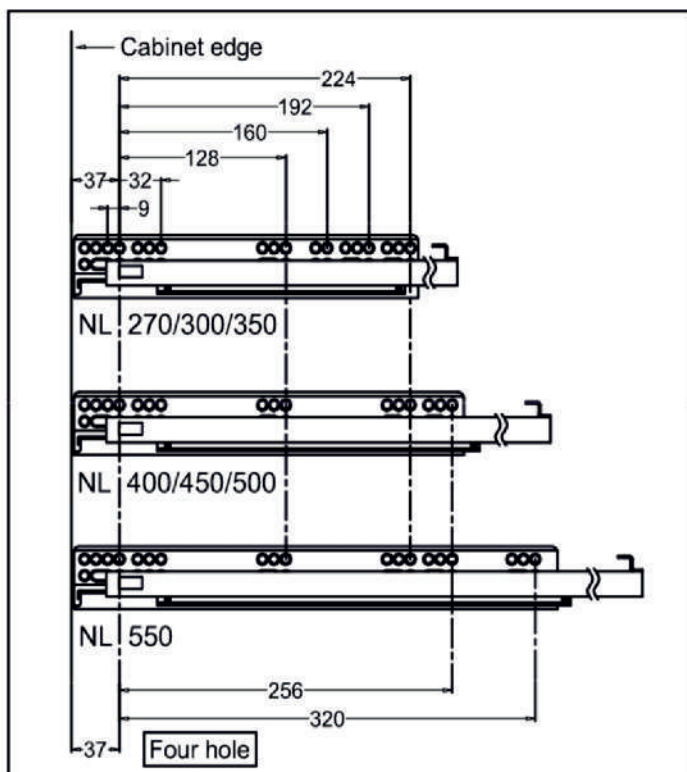

Drawer installation dimensions (mm)


LW=Internal cabinet width

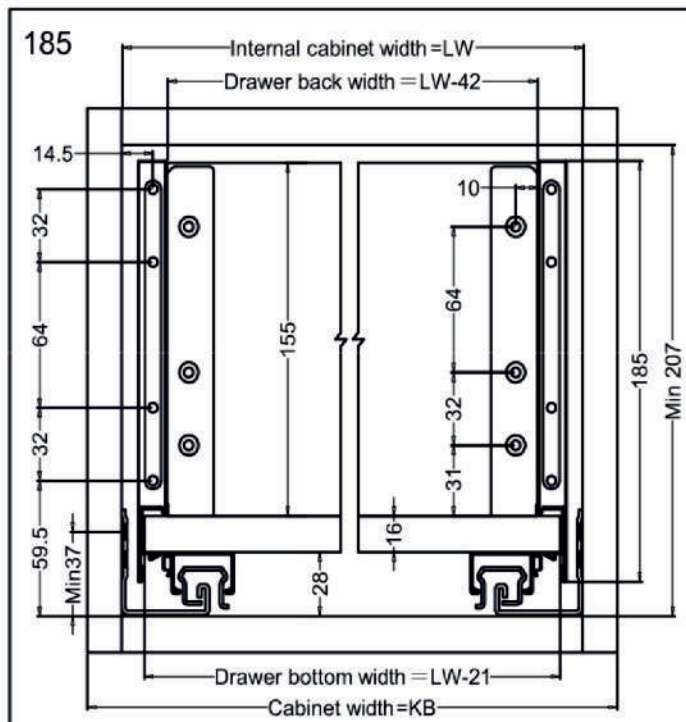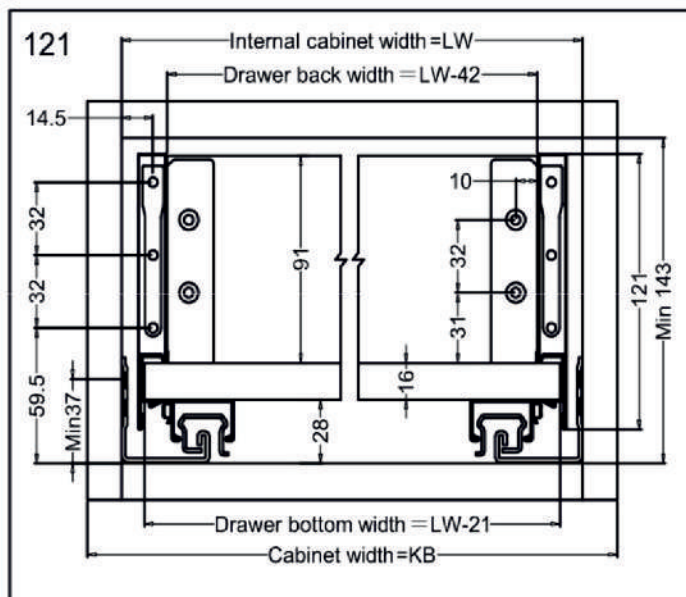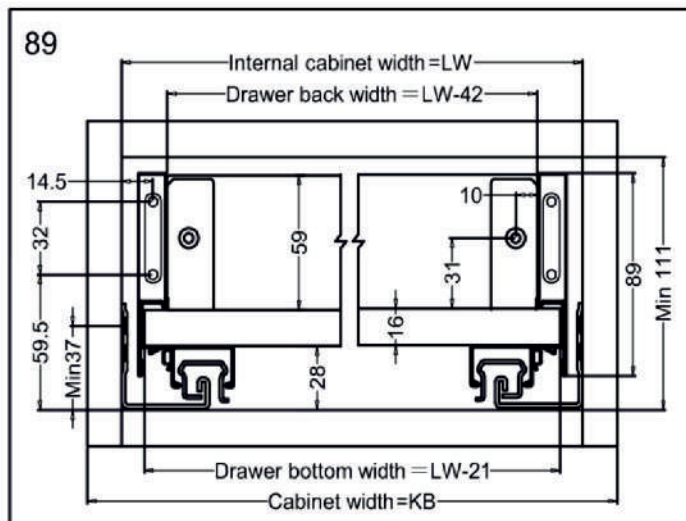


HANA BOX

Assembly removal and adjustment


Drawer assembly

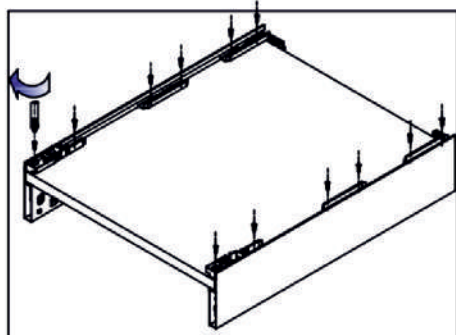


Bottom assembly

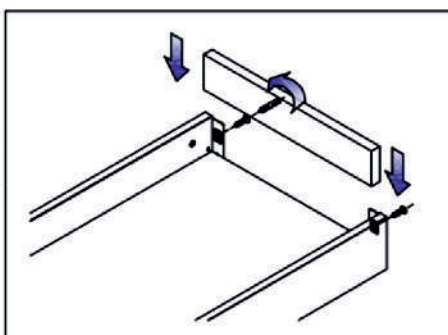


Back assembly

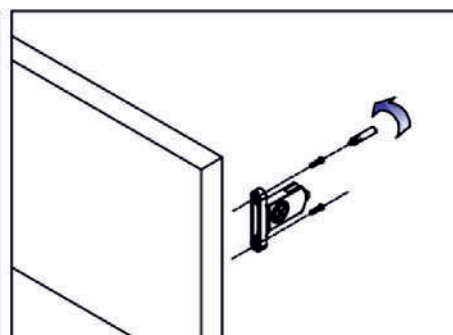


89 Front assembly

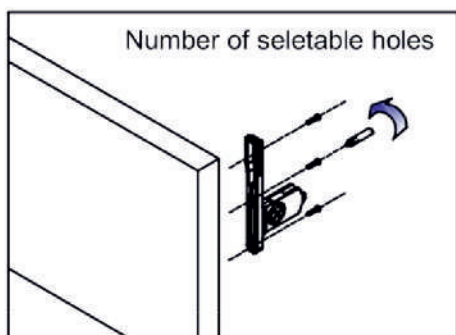


121 Front assembly

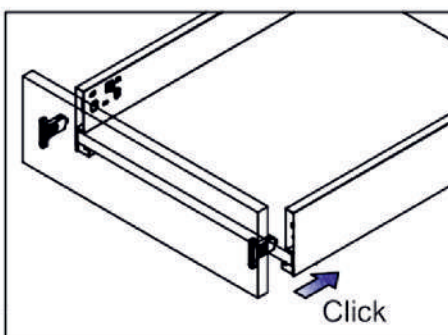


Click

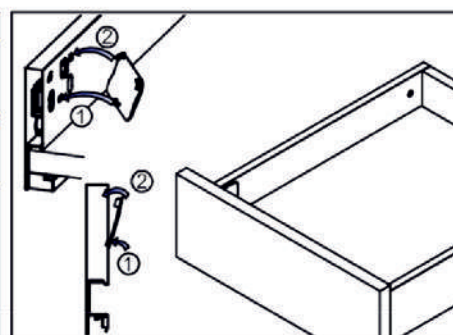


Adjustment

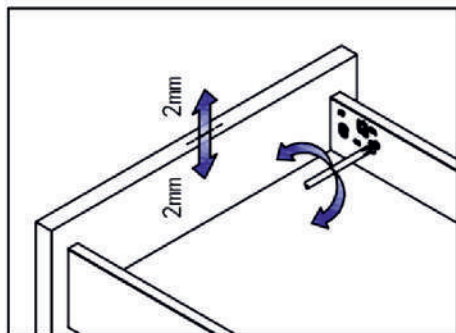

Up&down adjustment

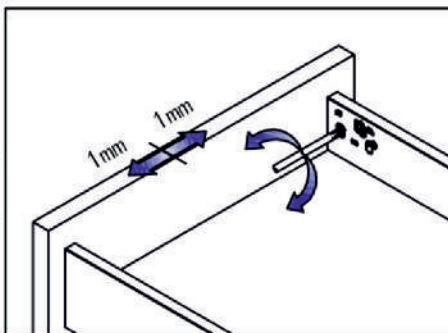


Left&right adjustment

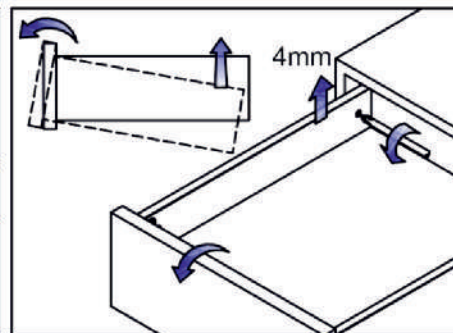


Front slope angle adjustment


Removal

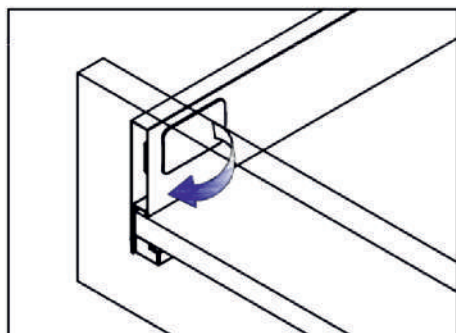

Tip up the cover and pull out

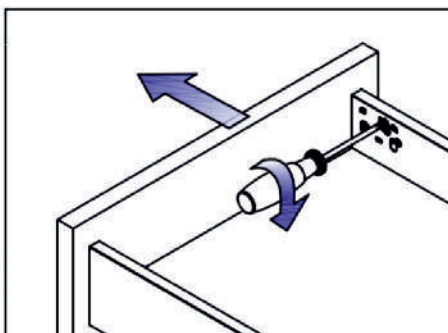

Removal drawer front

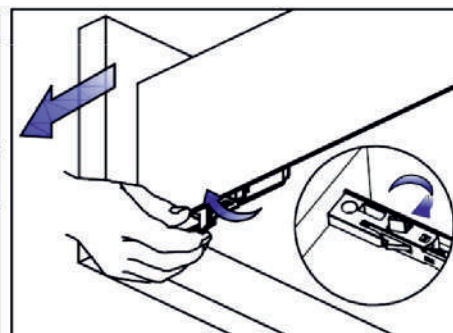


Removal drawer


HANA BOX

Assembly removal and adjustment


Drawer assembly

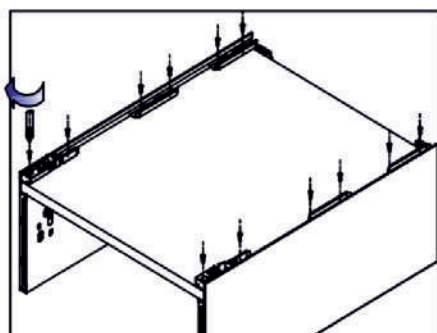


Bottom assembly

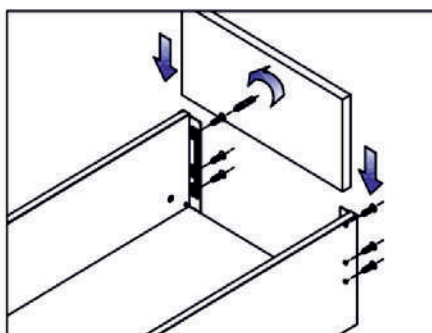


Back assembly

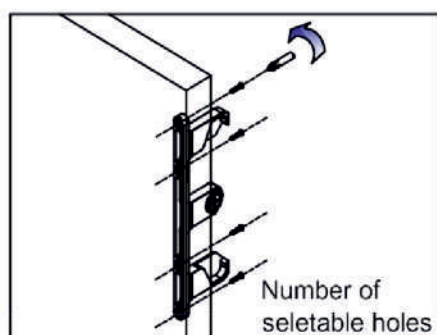


Front assembly

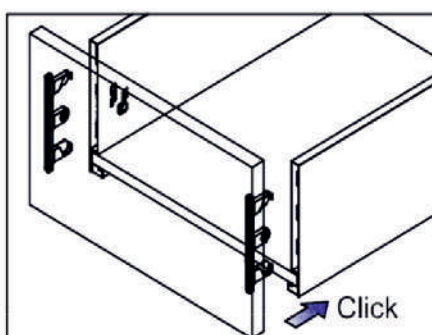


Click

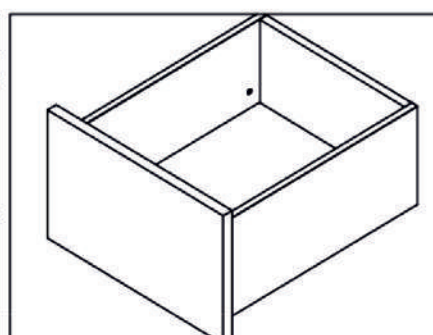


Adjustment

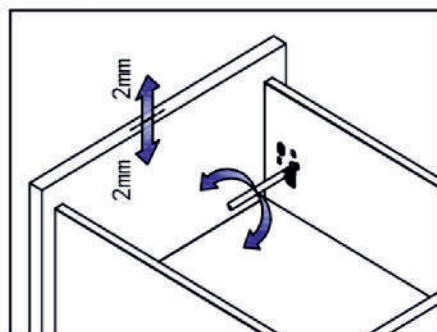

Up&down adjustment

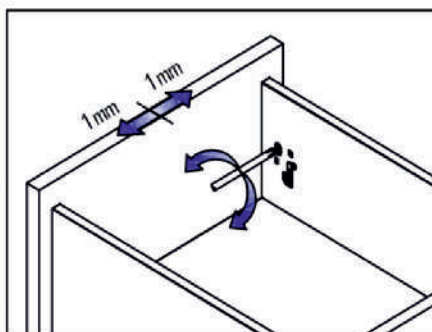


Left&right adjustment

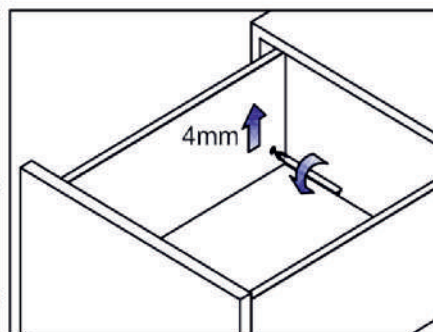


Front slope angle adjustment


Removal

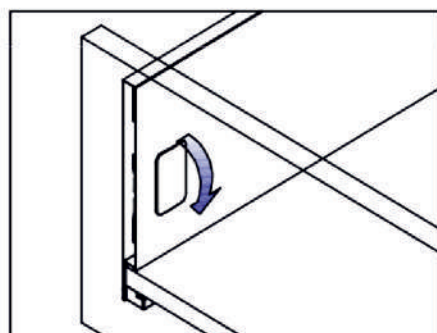

Tip up the cover and pull out

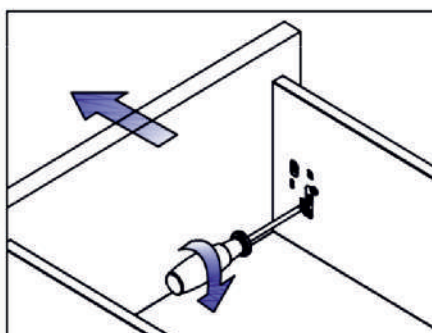

Removal drawer front

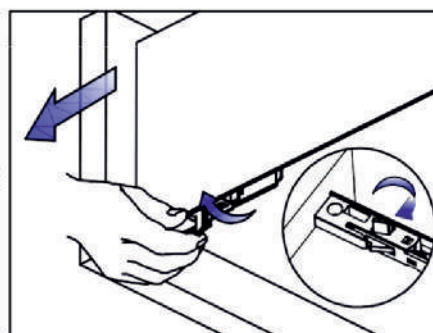


Removal drawer

INTERNAL ACCESSORIES

Internal accessories are more rewarding in completing a kitchen and realizing that all your kitchen items have a place to dwell. By incorporating internal accessories within a drawer or cabinet ensures optimum utilization of space in an organized manner.



INTERNAL ACCESSORIES

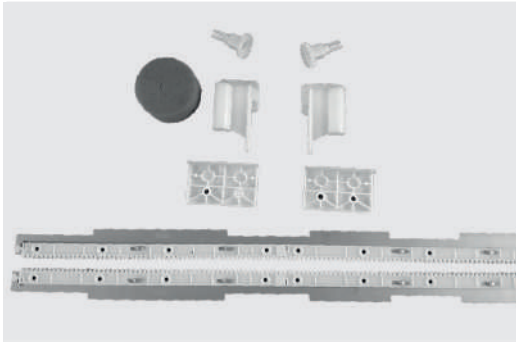

1034000 | 500 mm Stabiliser



1036000 | Single Cross Rail Connection



1036001 | Divider Rail Connection




1036002 | Horizontal Rail



1036003 | Vertical Rail



1037000 | Glass Side Front Connector Clip

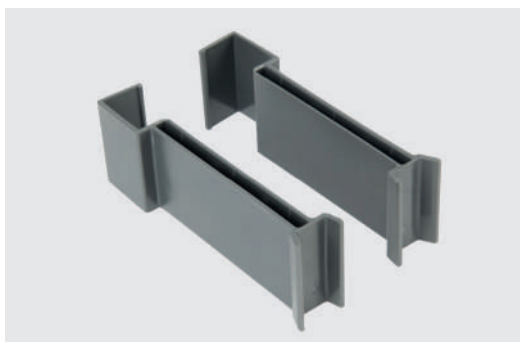


1037001 | Glass Side Adapter
Front- Gallery



1037002 | Glass Side Adapter
Back- Gallery




1037003 | Glass Side Adapter
Front-Double
Gallery

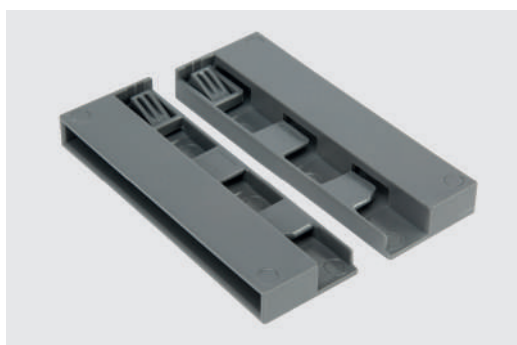

1037004 | Glass Side Adapter
Back-Double Gallery

INTERNAL ACCESSORIES

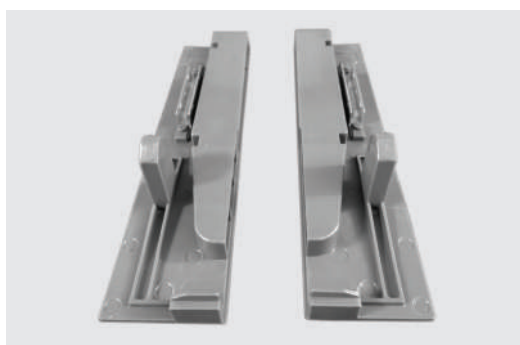


1037005 | Front Glass Bracket




1038000 | Aluminium Front
Handle Profile-
1100 mm




1038001 | Square Rod Front
Handle -1100 mm

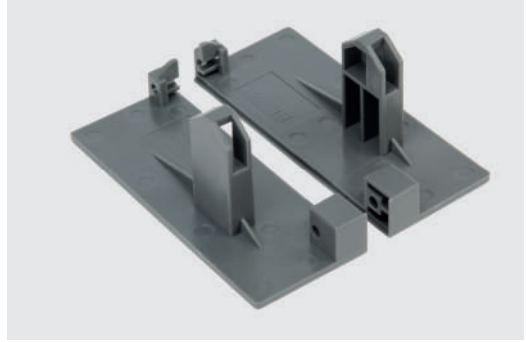

1038002 | Front Bracket Normal
Drawer

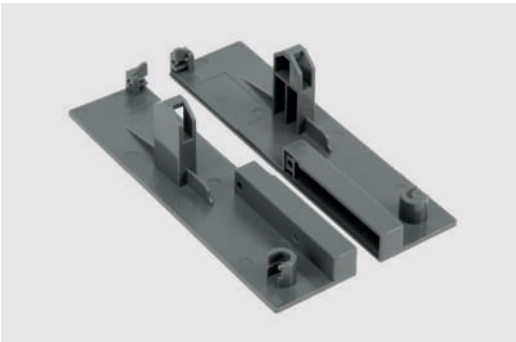

1038003 | Front Bracket Single
Gallery Drawer

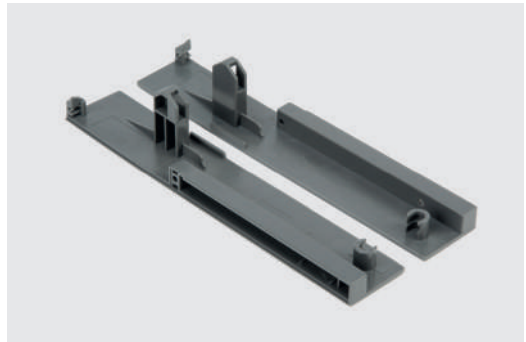

1038004 | Front Bracket Double
Gallery Drawer

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1034000	500 mm Stabiliser	1	Pc	1
1036000	Single Cross Rail Connection	1	Pc	1
1036001	Divider Rail Connection	1	Pc	1
1036002	Horizontal Rail	1	Pc	1
1036003	Vertical Rail	1	Pc	1
1037000	Glass Side Front Connector Clip	1	Set	1
1037001	Glass Side Adapter Front- Gallery	1	Set	1
1037002	Glass Side Adapter Back- Gallery	1	Set	1
1037003	Glass Side Adapter Front- Double Gallery	1	Set	1
1037004	Glass Side Adapter Back- Double Gallery	1	Set	1
1037005	Front Glass Bracket	1	Set	1
1038000	Aluminium Front Handle Profile- 1100 mm	1	Pc	1
1038001	Square Rod Front Handle -1100 mm	1	Pc	1
1038002	Front Bracket Normal Drawer	1	Set	1
1038003	Front Bracket Single Gallery Drawer	1	Set	1
1038004	Front Bracket Double Gallery Drawer	1	Set	1

PVC CUTLERY TRAY

One of its own kind of kitchen internal cabinet accessory, which ensures better storage of cutlery and related products in single organizer and makes it easy to operate.

We offer cutlery tray in multiple sizes which are 450mm, 500mm, 600mm, 700mm, 800mm, 900mm width and having depth of 500mm.



PVC CUTLERY

PVC CUTLERY TRAY





PVC CUTLERY

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1035450	PVC Cutlery 450 mm	1	Pc	10
1035500	PVC Cutlery 500 mm	1	Pc	10
1035600	PVC Cutlery 600 mm	1	Pc	10
1035700	PVC Cutlery 700 mm	1	Pc	10
1035800	PVC Cutlery 800 mm	1	Pc	10
1035900	PVC Cutlery 900 mm	1	Pc	10

* All dimensions are of carcass size

GAS SHOCK ABSORBER

This range of the product is used for overhead cabinets which enables the overhead cabinet shutter to stay at a point. Product comes with self integrated soft closing mechanism and has soft opening as well.

We offer load bearing capacities of 40N, 60N, 80N, 100N, 120N, 150N which are selected as per the size of the shutter in which it is to be installed.



GAS SHOCK ABSORBER

GAS SHOCK ABSORBER







GAS SHOCK ABSORBER



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1040040	40N Gas Shock Absorber	1	Pc	100
1040060	60N Gas Shock Absorber	1	Pc	100
1040080	80N Gas Shock Absorber	1	Pc	100
1040100	100N Gas Shock Absorber	1	Pc	100
1040120	120N Gas Shock Absorber	1	Pc	100
1040150	150N Gas Shock Absorber	1	Pc	100

DAMPING GAS SPRING INSTALLATION MANUAL

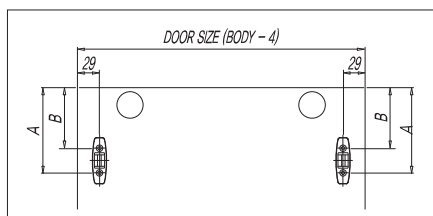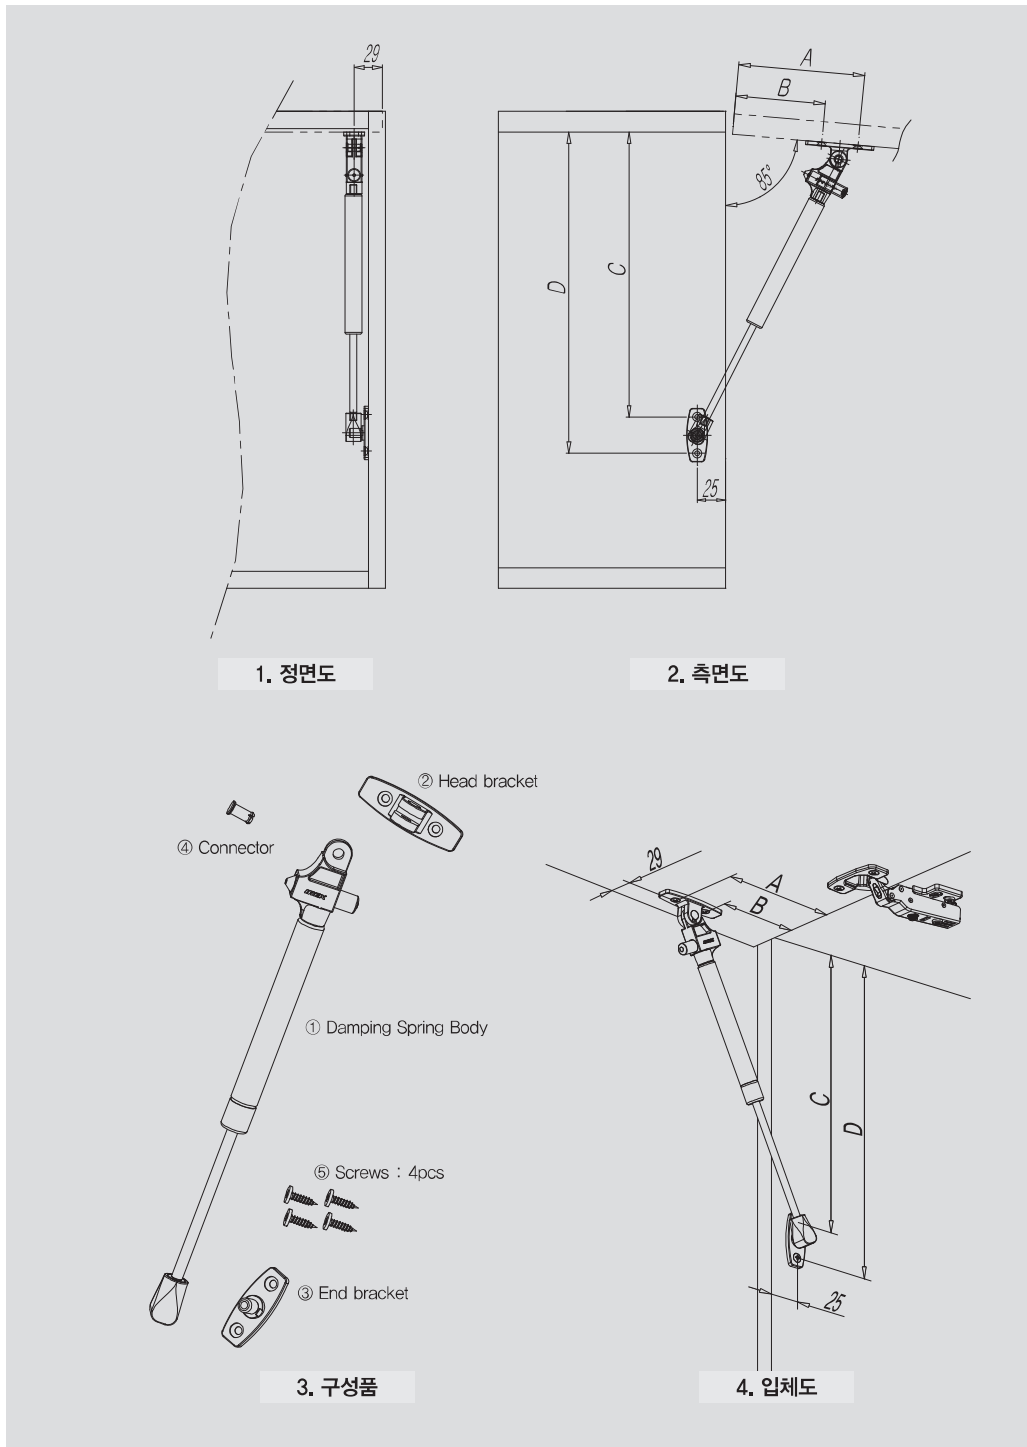

H \ W	A	B	C	D
245mm	111	79	251	283
180mm	81	49	191	223
150mm	71	39	163	195

GAS SPRING INSTALLATION MANUAL

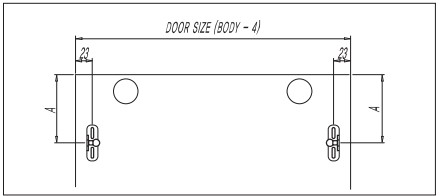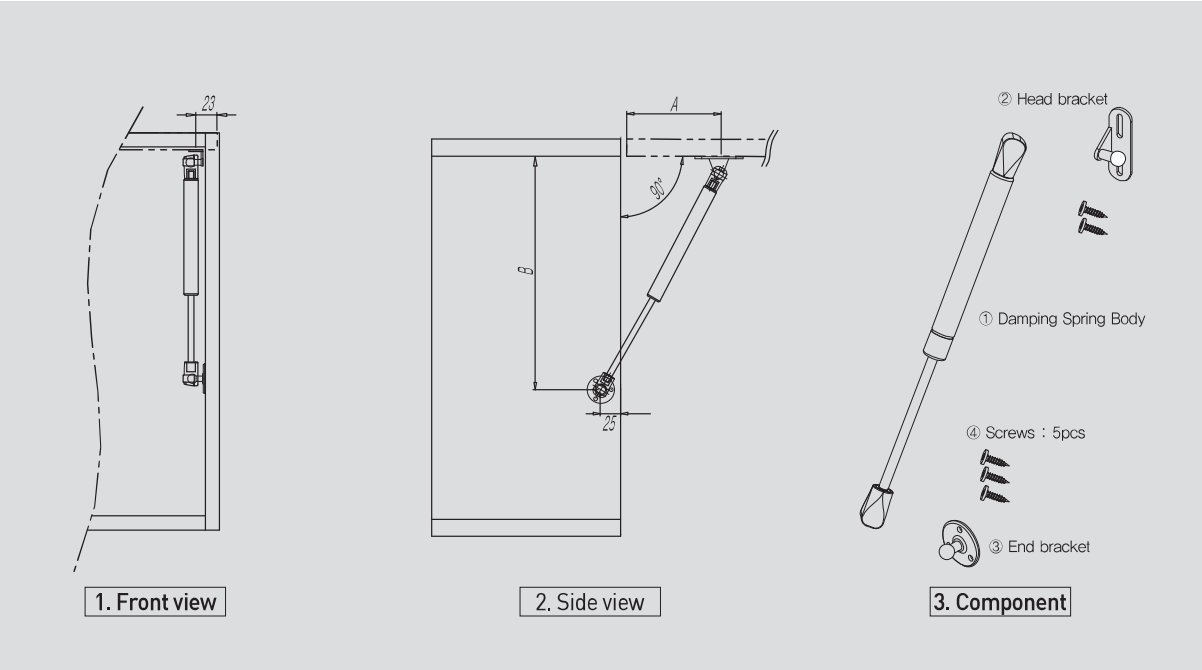

H \ W	A	B
245	94	236
180	69	174
150	57	155

GAS SHOCK ABSORBER

Application Table of Damping Gas Shock Absorber

DOOR MDF 18T (45 S/T)

H \ W	400	500	600	700	800	900	1000	1100	1200
350	X	X	40	40	40	40	60	60	60
400	X	40	40	40	60	60	60	60	80
450	40	40	60	60	60	80	80	80	100
500	40	60	60	60	80	80	80	100	100
550	60	60	80	80	80	100	100	120	120
600	60	80	80	100	100	120	120	150	150
650	60	80	100	120	120	150	150	X	X
700	80	100	100	120	150	150	X	X	X

LIFT UP

Our technologies help you improve your space utilization. These lift-ups help you improve your overhead space utilization with maximum style. They allow opening of shutters upwards ensuring more practical usage of area and minimum hindrance to movement. Lift-ups allow ergonomic designs and most important of all, they are easy to install.

BI-FOLD LIFT ASSIST STAY



Features


- For upward-opening flap doors.
- Equipped with :
 - Lift assist (to make flap doors feel lighter)
 - Free stop (holds position at any angle from 50° to fully open)
 - Soft-closing (slows down closing speed to prevent slamming between 0° to 40°)
- Successfully passed 30,000 open/close cycles in a private test.
- East to adjust opening angle (must be used together with concealed hinge with appropriate opening degree)
- Fast installation through vertical adjustment function on mounting plate (on flap)
- Installation is simple using the template (included)

Lift up working calculation

***Weight of Shutter={Height(mm) x Width(mm) x Thickness(mm) x .85} / 10^6**

***Weight=kg, Height=mm**

Multiple Adjustent

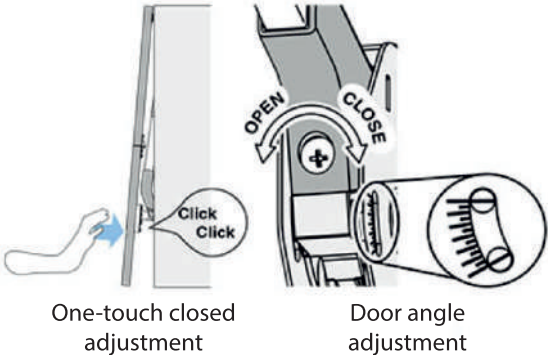

LIFT UP

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
024609	HBF ELAN- ML (6.6-8.2 kg)	1	Set	1
024610	HBF ELAN- MM (8.2-9.8 kg)	1	Set	1
024611	HBF ELAN- HM (9.8-11.4 kg)	1	Set	1
024612	HBF ELAN- HH (11.4-13.0 kg)	1	Set	1

LIFT ASSIST STAY




Features


- For upward-opening flap doors.
- Equipped with :
 - Lift assist (to make flap doors feel lighter)
 - Free stop (holds position at any angle from 30° to 70°)
 - Soft-closing (slows down closing speed to prevent slamming 0° and 20°)
- Successfully passed 30,000 open/close cycles in a private test.
- 2011 Good Design Award Winner
- Placed at the top of interior of the cabinet, significantly reducing dead space and not getting in the way when installing shelves.
- No hinges or connecting bars are needed.
- Easy alignment : Simply press the body to the top of the interior of the cabinet and align the front flush with the cabinet.
- Fast and easy installation : Body is attached to mounting plate (on flap) simply snapping it in.
- If flap is within specification, does not require torque adjustment post installation.

3 Function in 1 Stay



1. Lift-assist



2. Free-stop

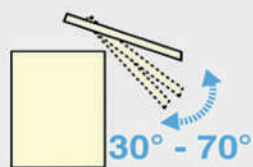

3. Soft-close




Lift up working calculation

*Lifting Power =(Weight of Shutter-1) x Height (mm)

*Weight=kg, Height=mm

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
018905	EZS ELAN (LP : 3850-4950)	1	Set	1
018906	EZS ELAN (LP : 4700-5600)	1	Set	1
018907	EZS ELAN (LP : 5550-6930)	1	Set	1

EASY LIFT ASSIST STAY

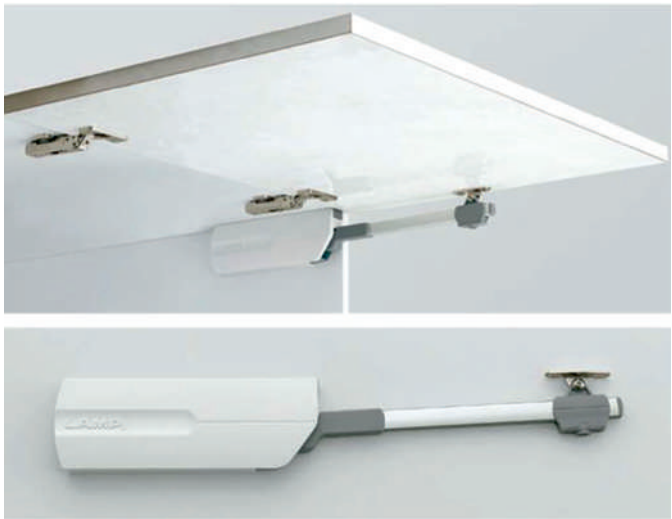


Features


- For upward-opening flap doors.
- Equipped with :
 - Lift assist (to make flap doors feel lighter)
 - Free stop (holds position at any angle from 30° to fully open)
 - Soft-closing (slows down closing speed to prevent slamming between 0° and 30°)
- Recognized by LGA for 40,000 cycles
- Easy alignment : When doing an 19mm overlay install, simply press the body to the top of the interior of the cabinet and align the front plate flush with the cabinet.
- Easy installation : Can be installed on both sides from the front
- Can be used singly or in pairs to accomodate a wide range of door sizes/weights
- Bracket (sold separately) available for aluminium frame flap doors.
- Please contact us directly for information about what types of hinges can be used with SLS-ELAN

3 Function in 1 Stay


1. Lift-assist

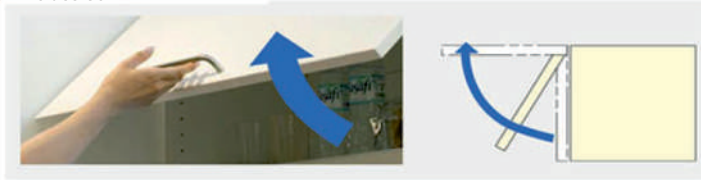

2. Free-stop

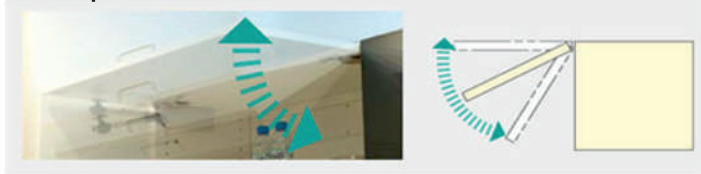

3. Soft-close

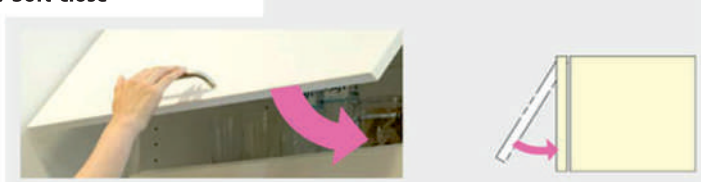

Lift up working calculation


***Torque = {(Weight of Shutter) x Height (mm)} / 20**

***Weight=kg, Height=mm**

LIFT UP

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
015490	SLS ELAN - ML (50-75 kgf)	1	Set	1
015491	SLS ELAN - MR (50-75 kgf)	1	Set	1
015492	SLS ELAN - HL (75-100 kgf)	1	Set	1
015493	SLS ELAN - HR (75-100 kgf)	1	Set	1

KITCHEN ACCESSORIES

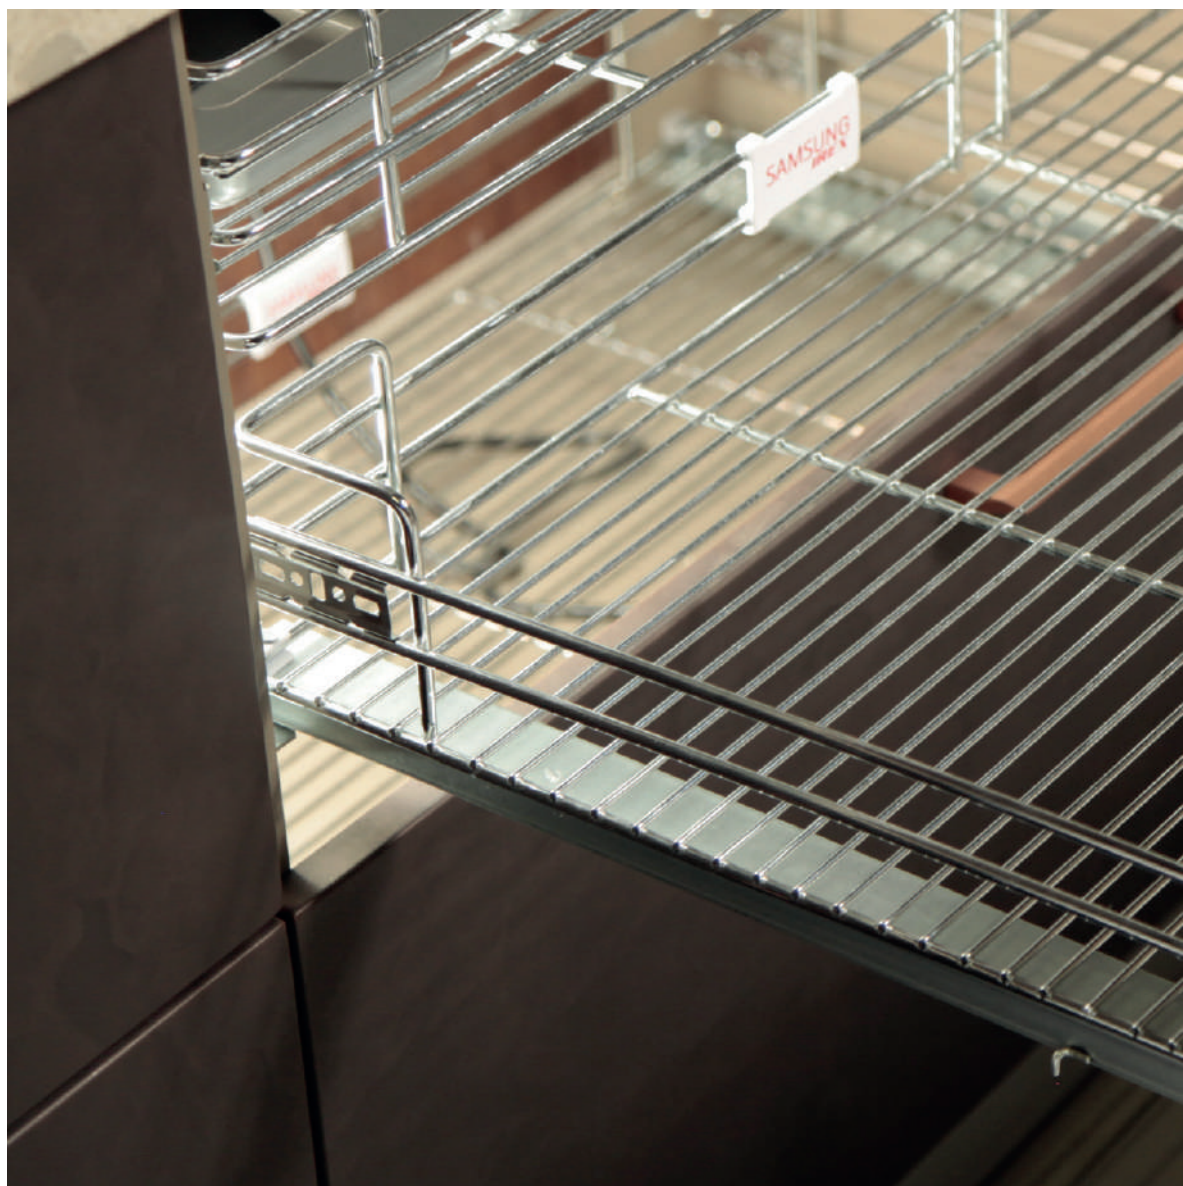

BASKETS
KUM SERIES
BAEKUM SERIES


KITCHEN ACCESSORIES




BASKETS

We offer new range of stainless steel wire baskets, which are alternative to wicker or plastic baskets and can be used in a better way to organise and store items.


Our wire baskets are in ergonomic design with multiple sizes ensuring the better storage place. Wire baskets can be installed with all the application: ball bearing slides, damping ball bearing slides and under rail slides.

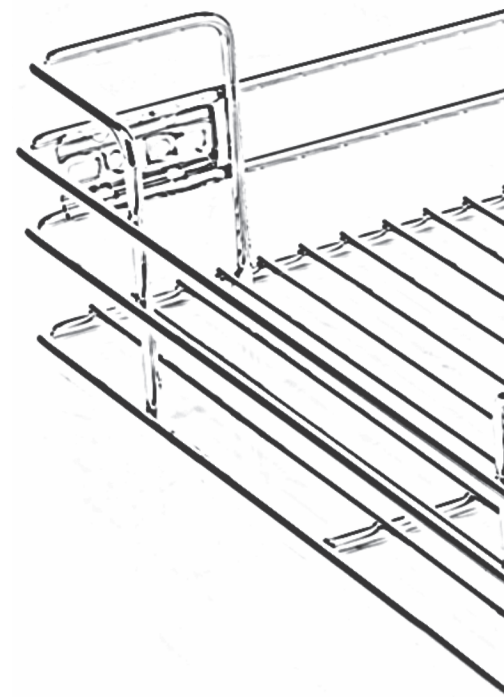


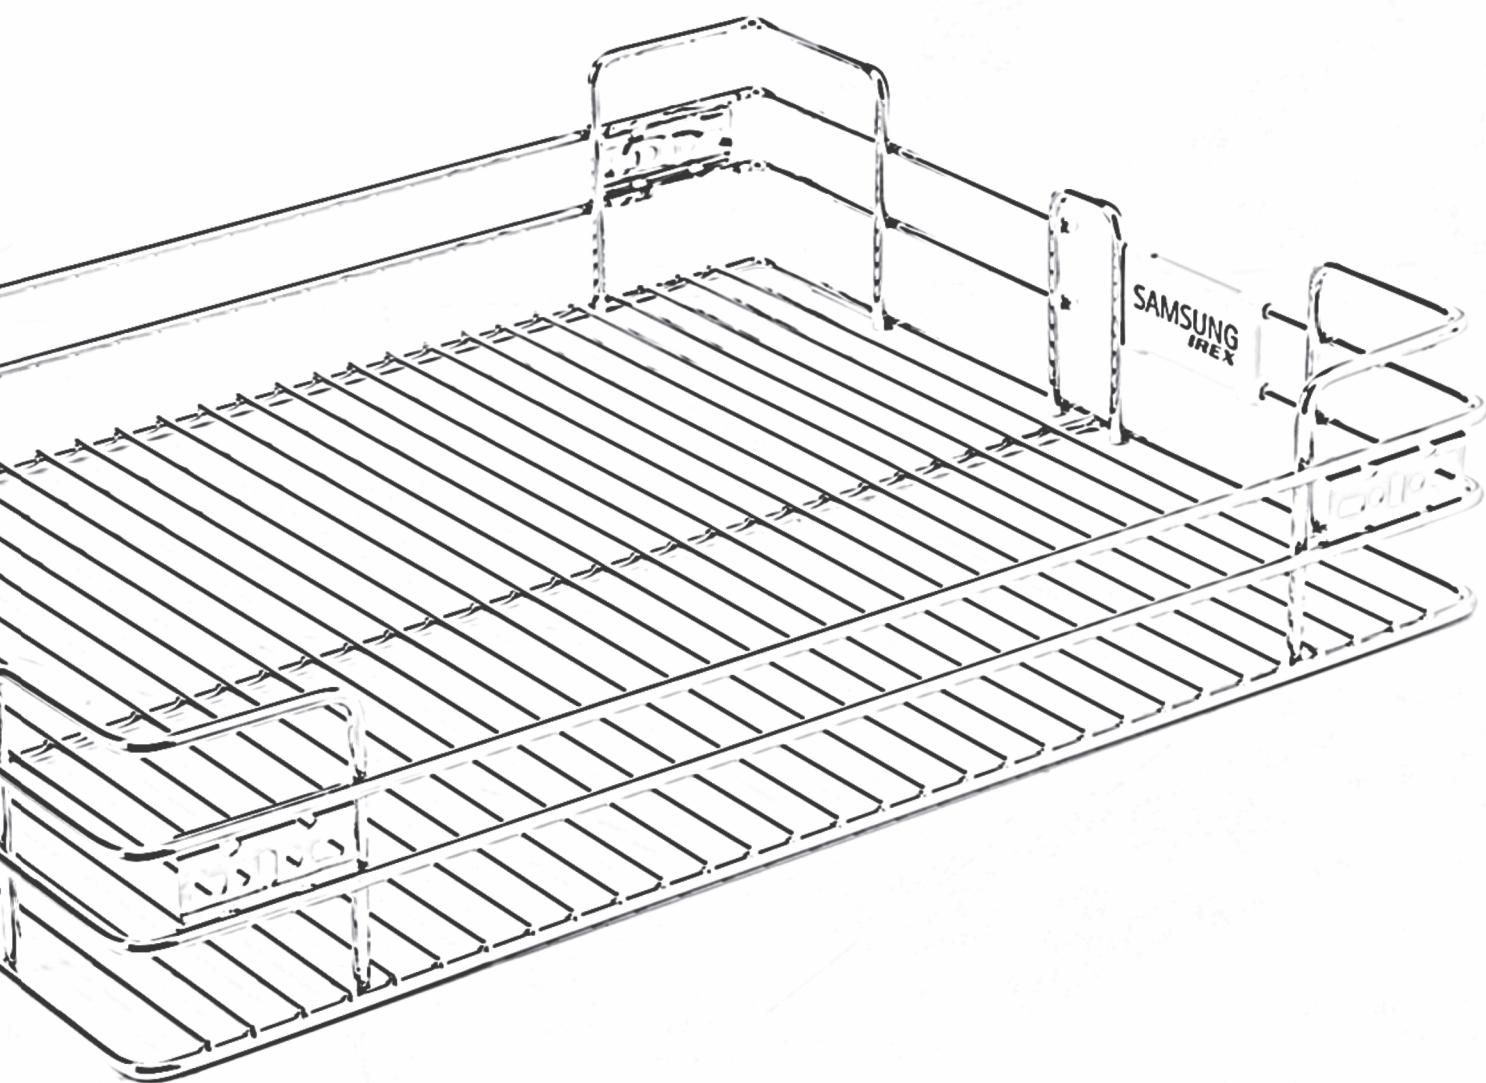

WIRE BASKET

MULTI PURPOSE BASKET

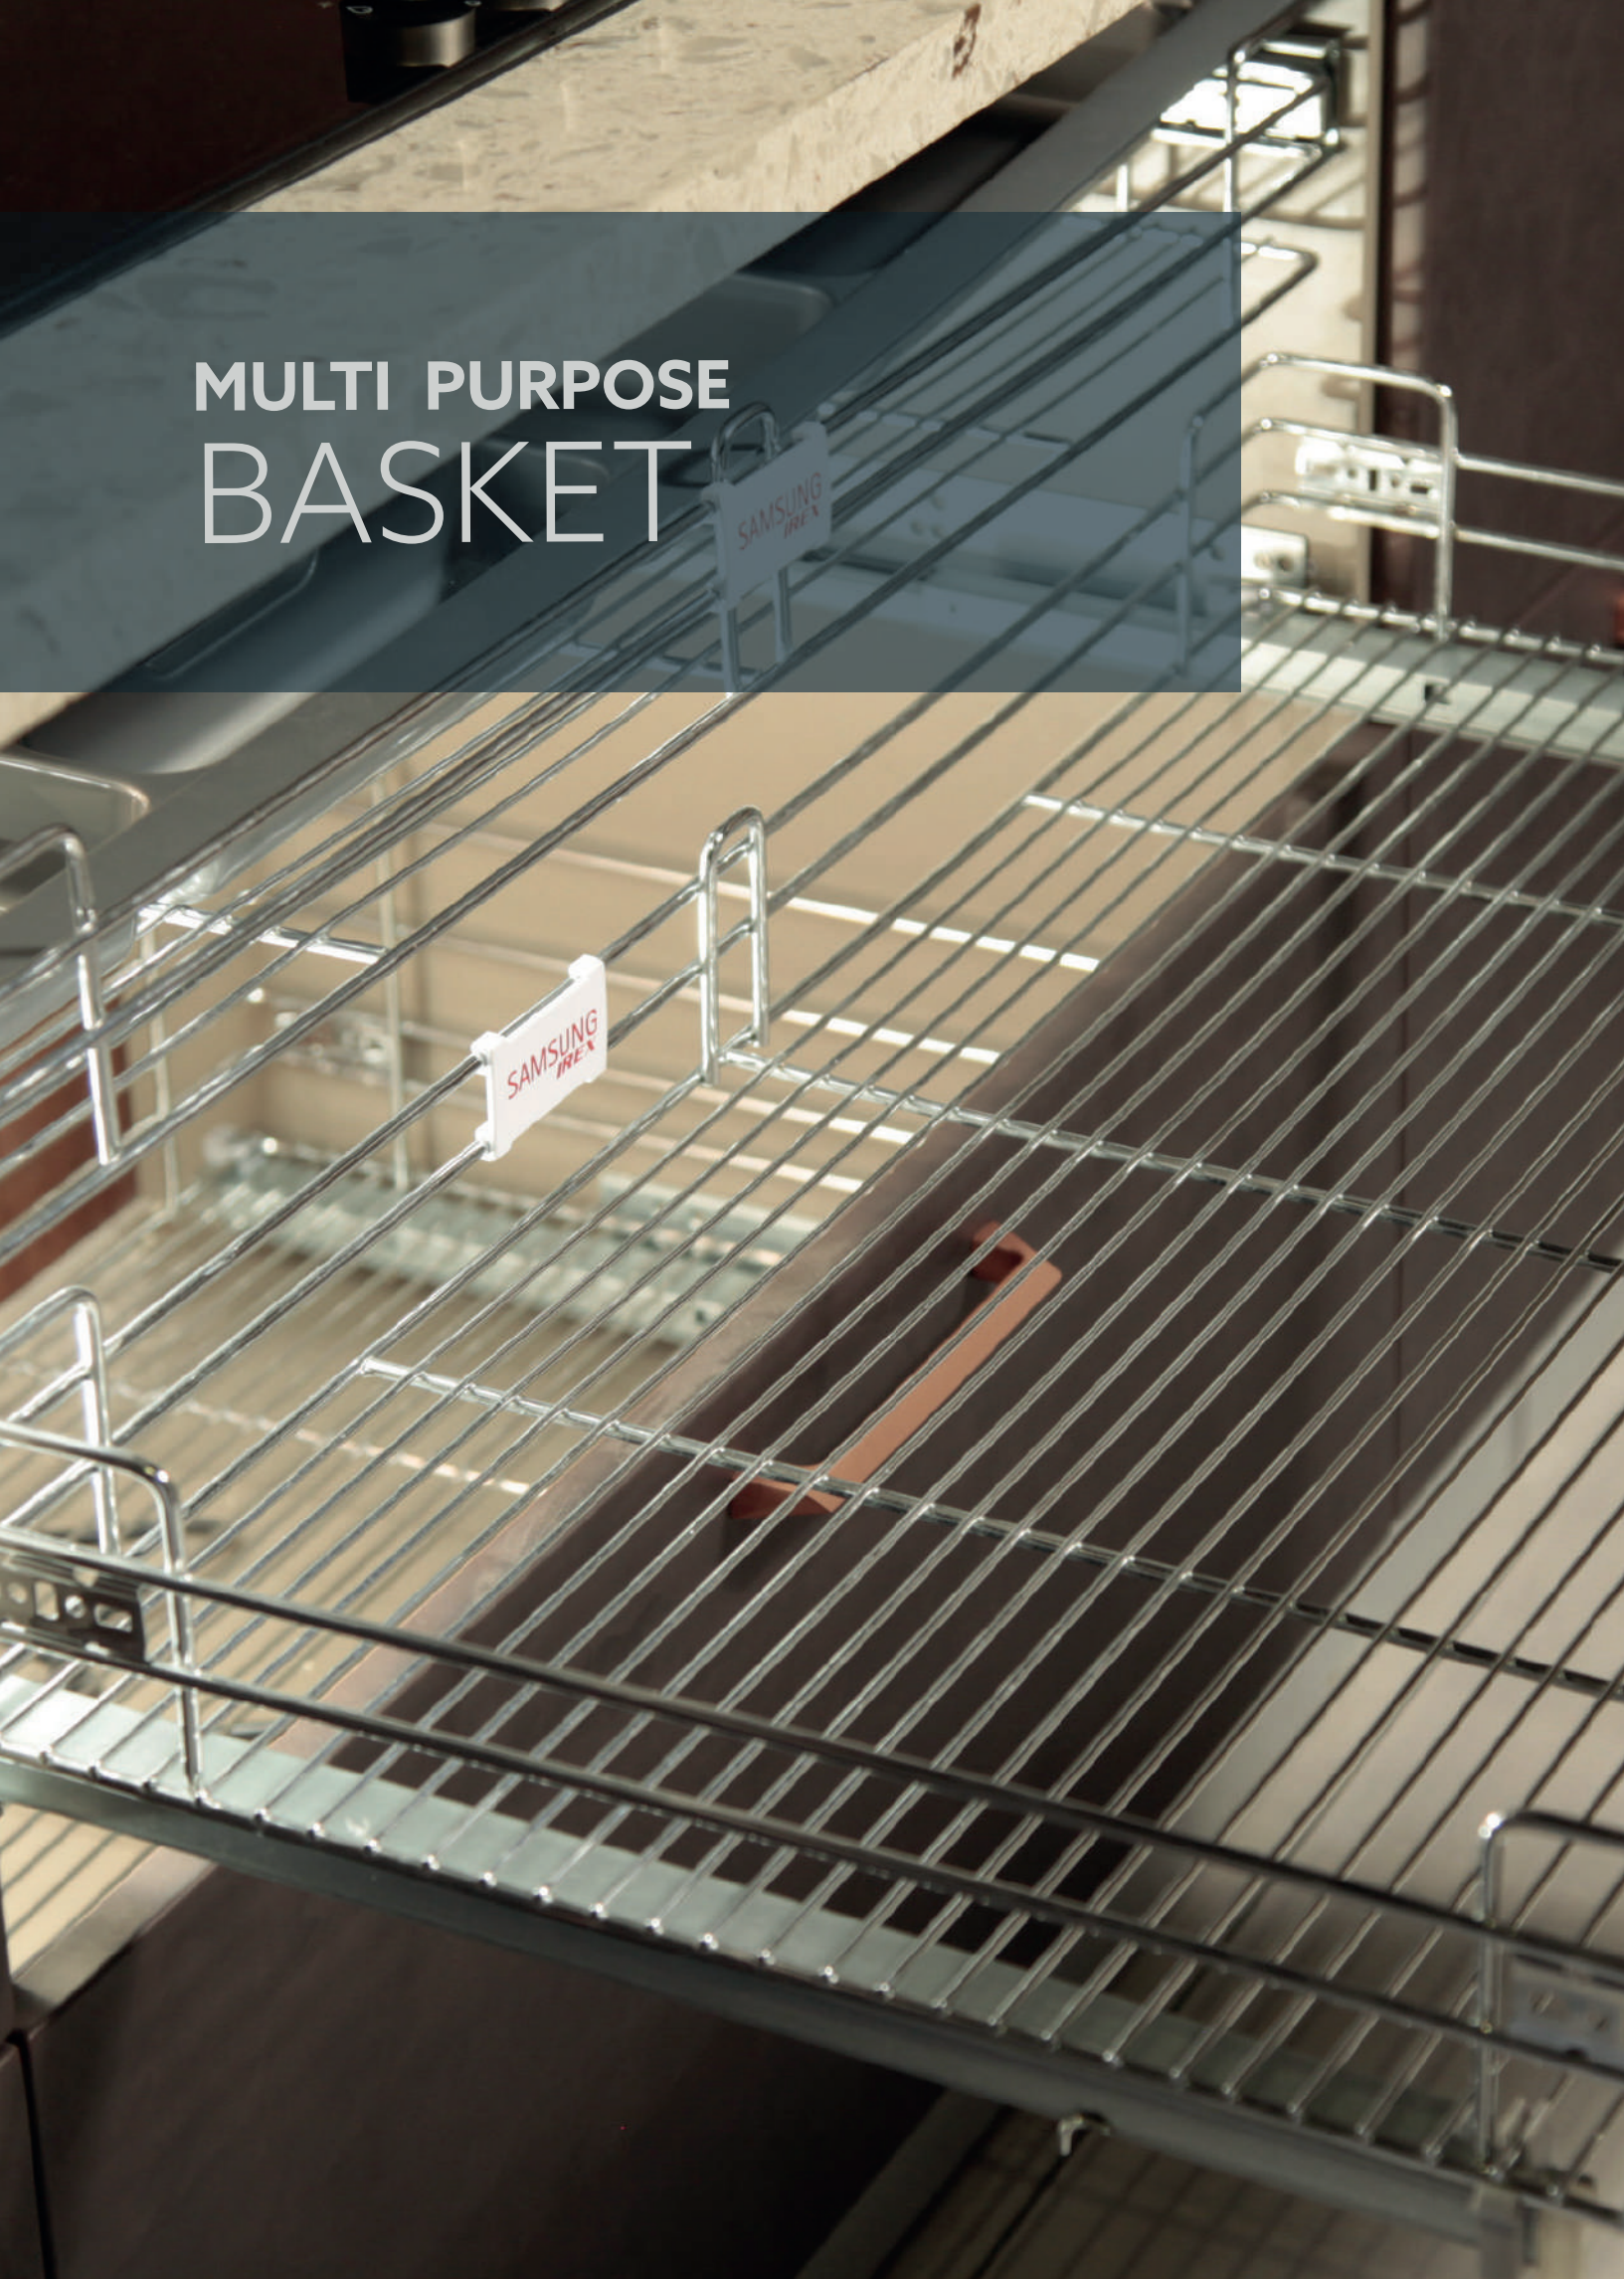


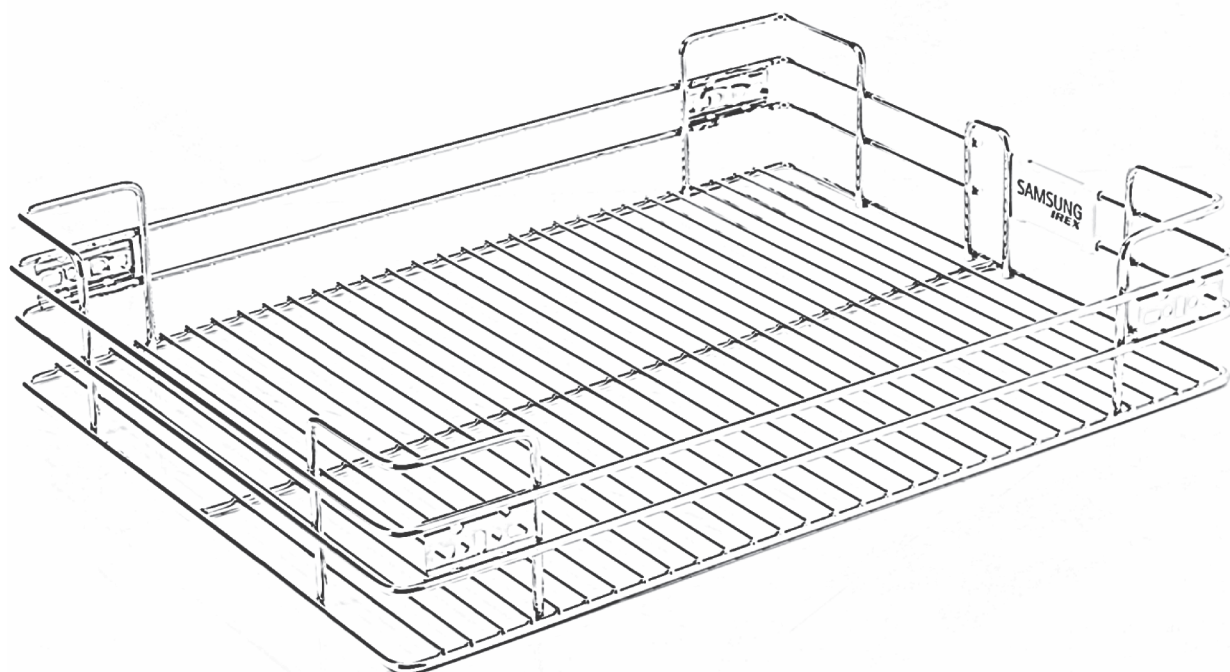


ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2010154	15x20x4	1	Pc	6
2010156	15x20x6	1	Pc	4
2010158	15x20x8	1	Pc	3
2010174	17x20x4	1	Pc	6
2010176	17x20x6	1	Pc	4
2010178	17x20x8	1	Pc	3
2010194	19x20x4	1	Pc	6
2010196	19x20x6	1	Pc	4
2010198	19x20x8	1	Pc	3
2010214	21x20x4	1	Pc	6
2010216	21x20x6	1	Pc	4
2010218	21x20x8	1	Pc	3
2010244	24x20x4	1	Pc	6
2010246	24x20x6	1	Pc	4
2010248	24x20x8	1	Pc	3
2010274	27x20x4	1	Pc	6
2010276	27x20x6	1	Pc	4
2010278	27x20x8	1	Pc	3
2010334	33x20x4	1	Pc	6
2010336	33x20x6	1	Pc	4
2010338	33x20x8	1	Pc	3

WIRE BASKET

THALI BASKET

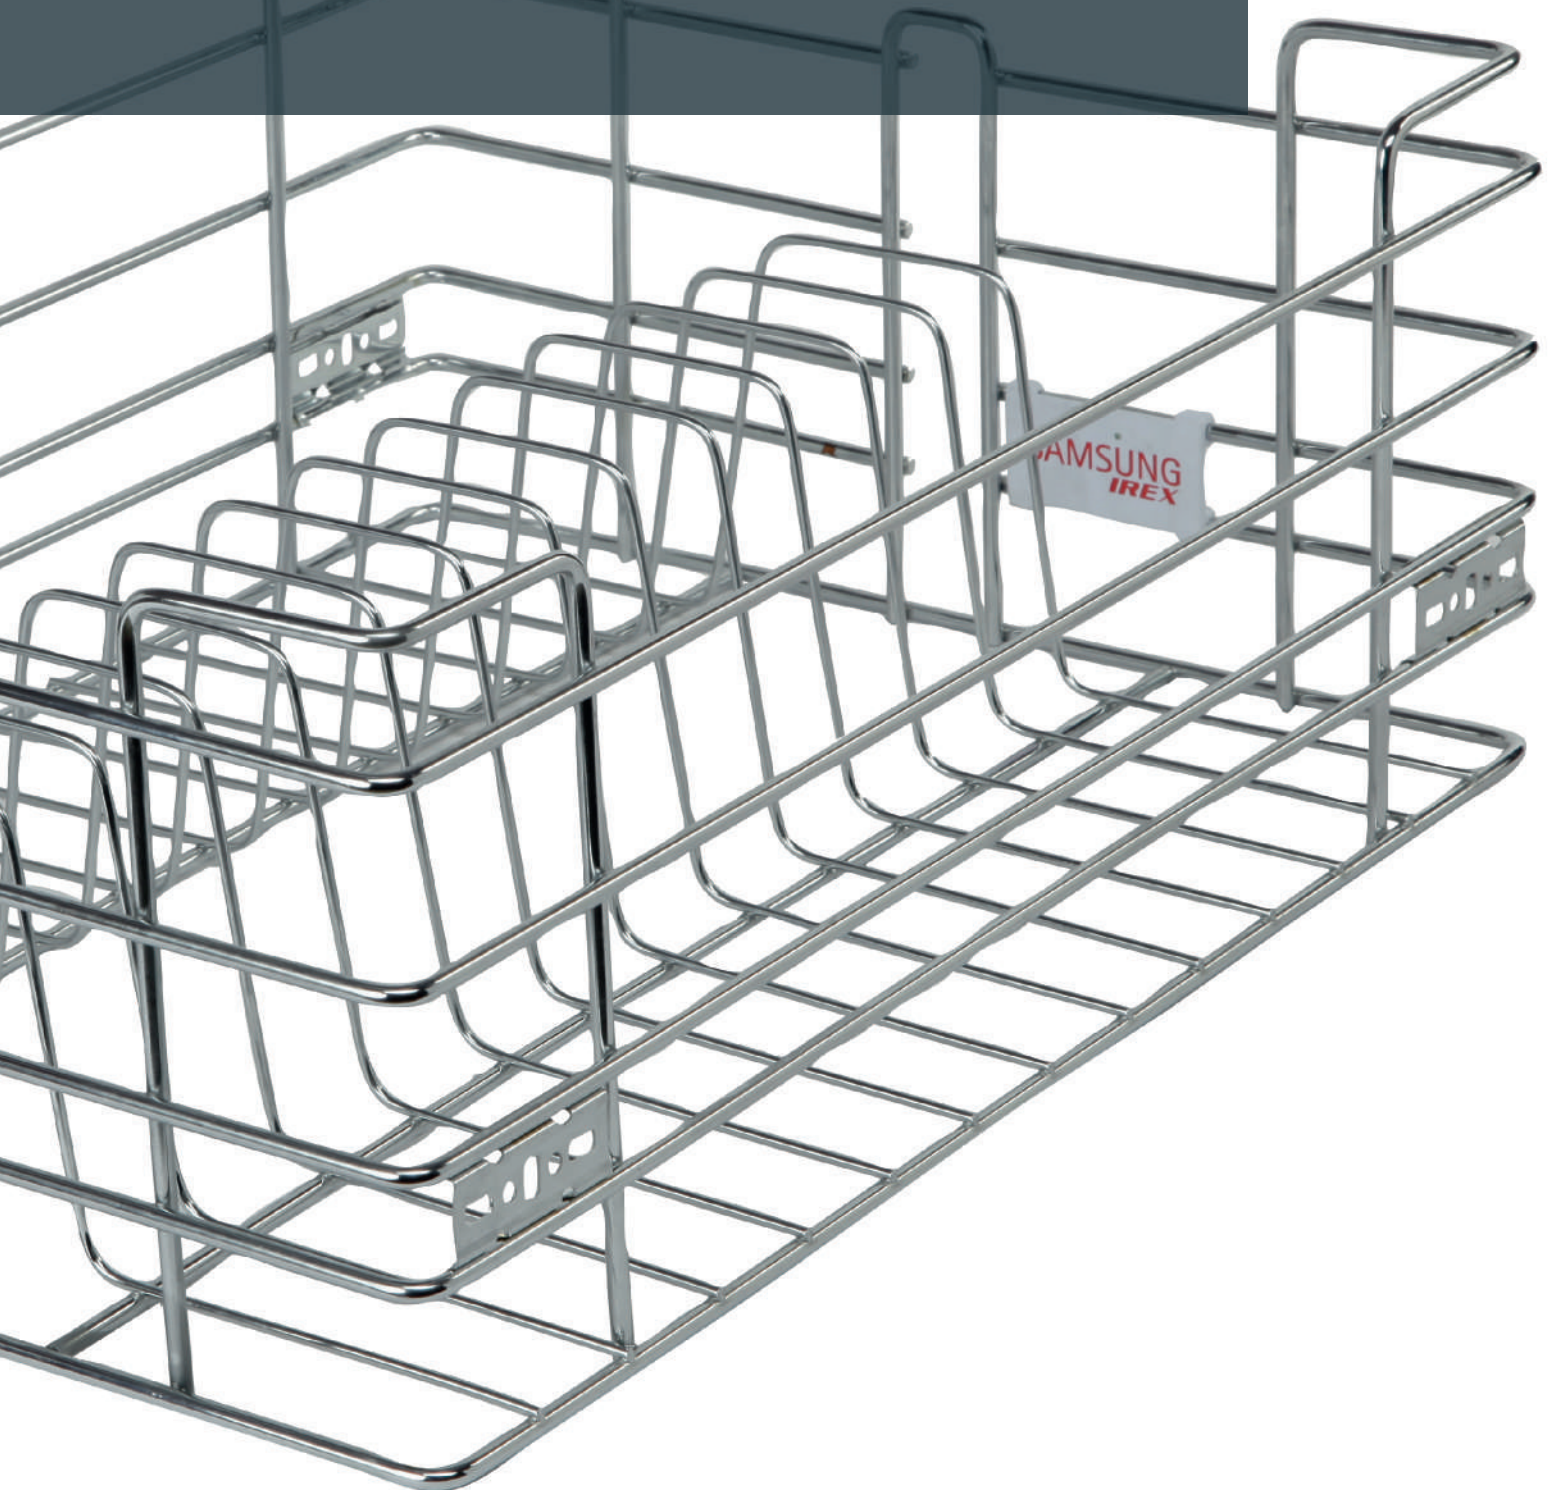

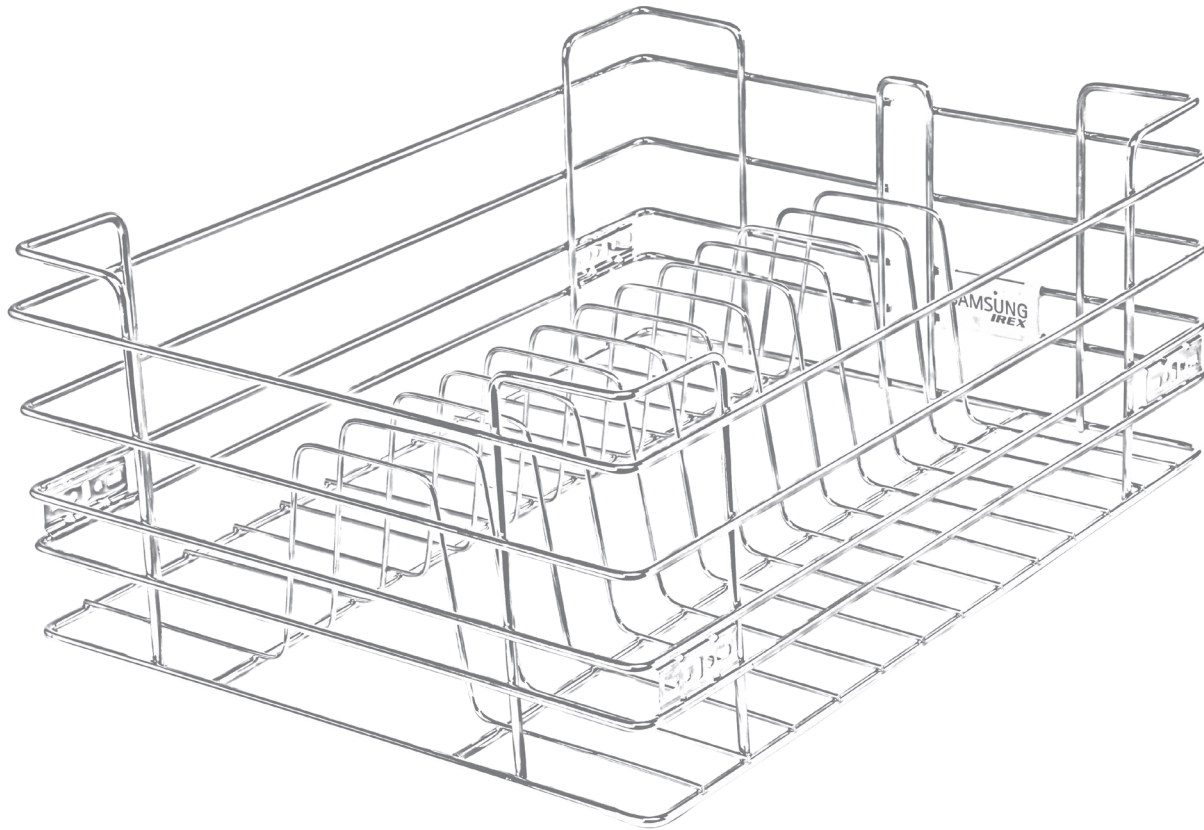


WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2011158	15x20x8	1	Pc	3
2011178	17x20x8	1	Pc	3
2011198	19x20x8	1	Pc	3
2011218	21x20x8	1	Pc	3
2011248	24x20x8	1	Pc	3

CUP & SAUCER BASKET




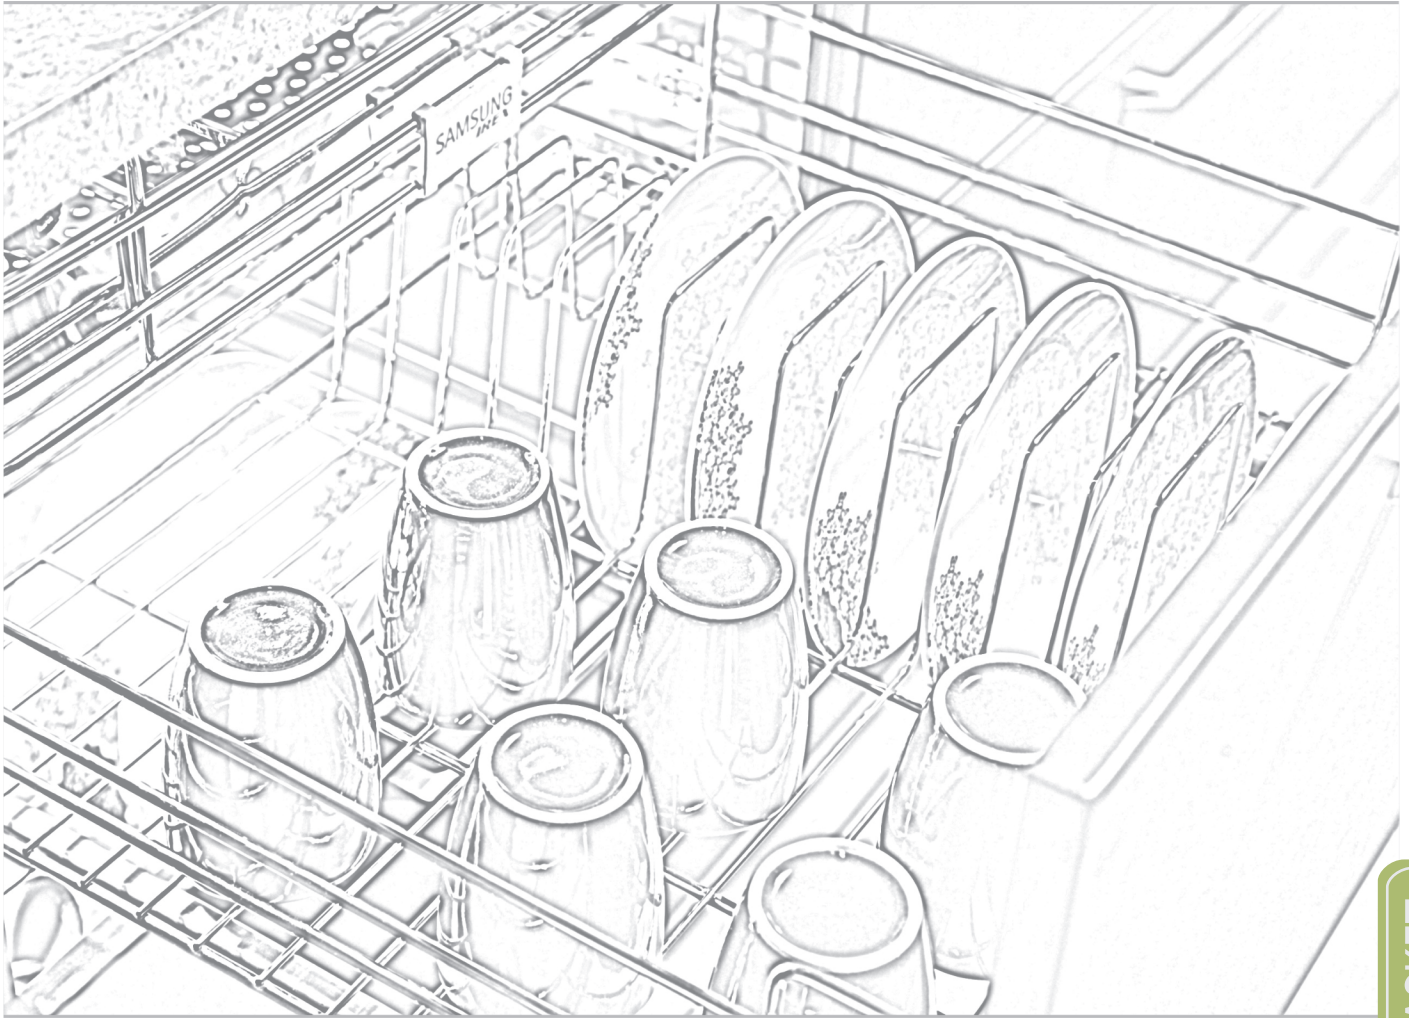


WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2012154	15x20x4	1	Pc	6
2012174	17x20x4	1	Pc	6
2012194	19x20x4	1	Pc	6
2012214	21x20x4	1	Pc	6
2012244	24x20x4	1	Pc	6

PLATE BASKET

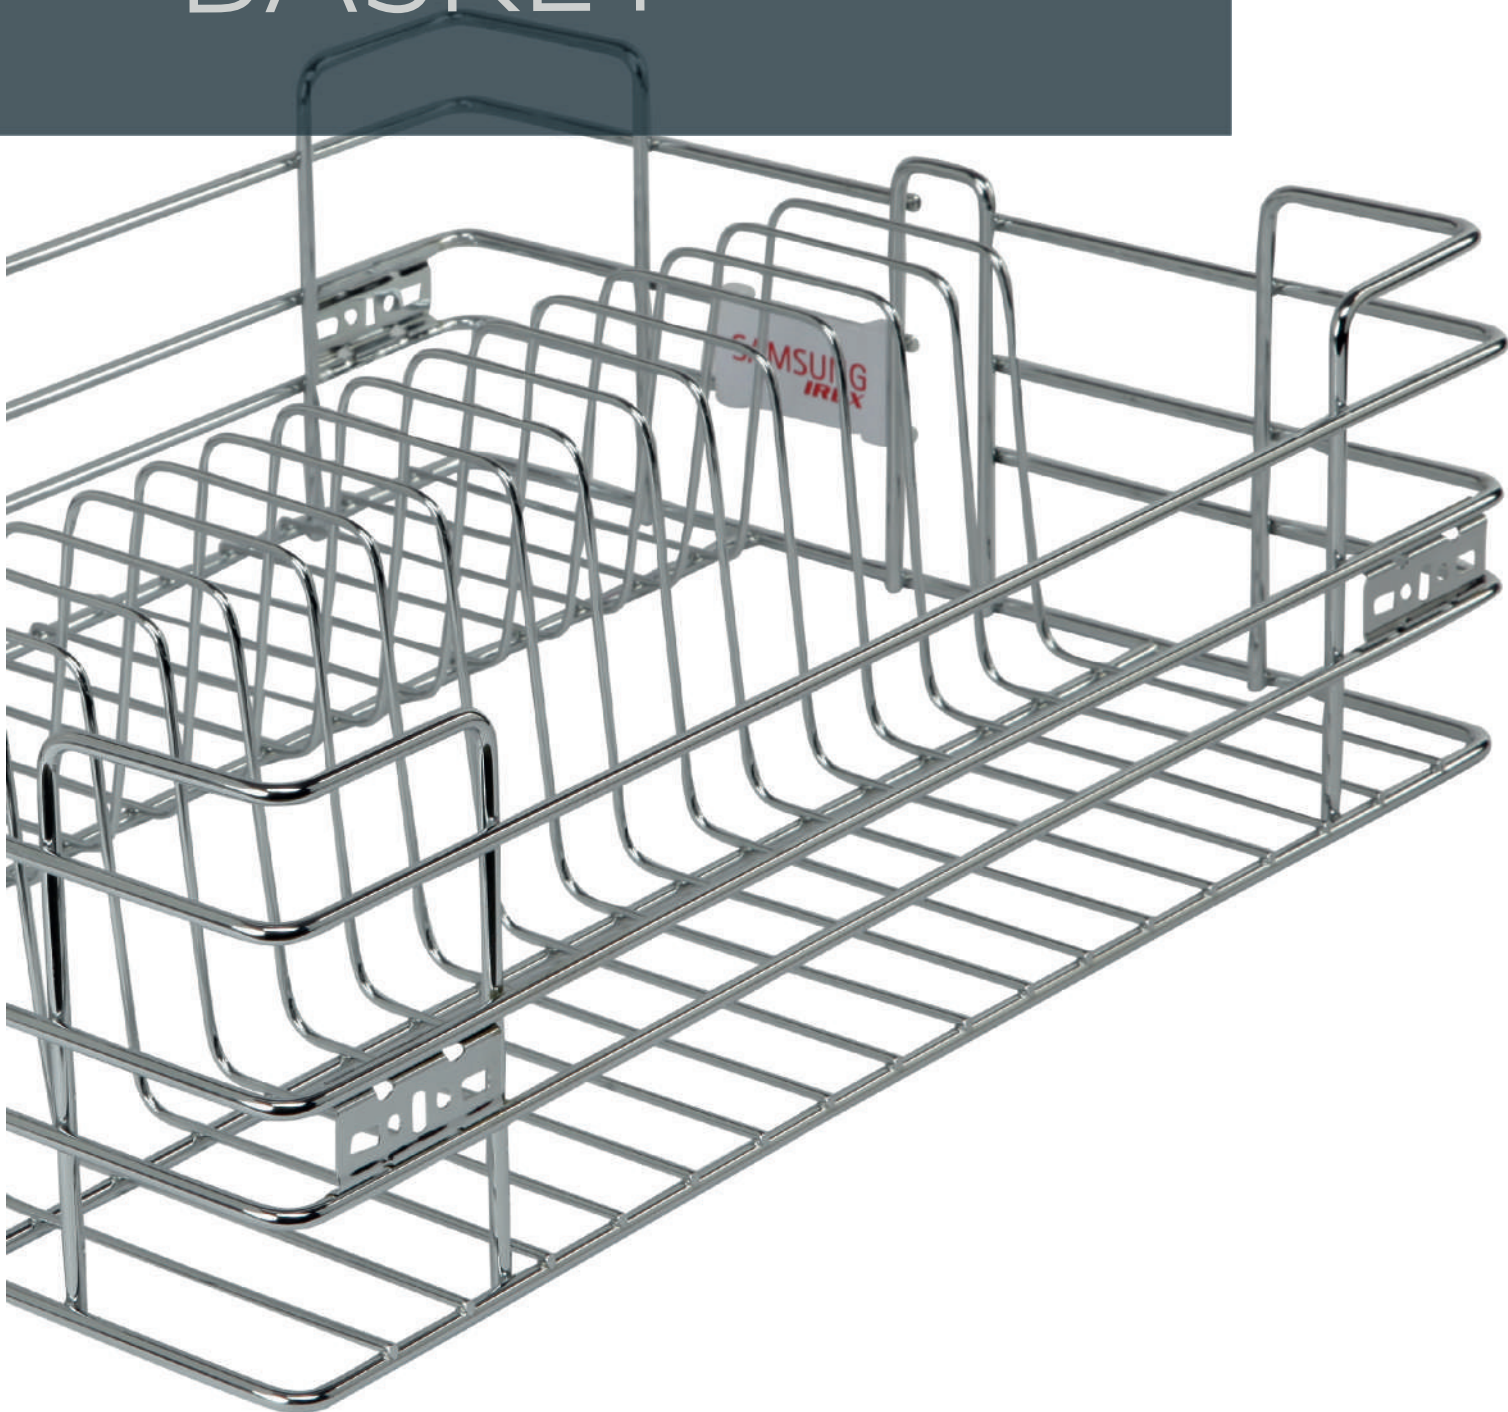

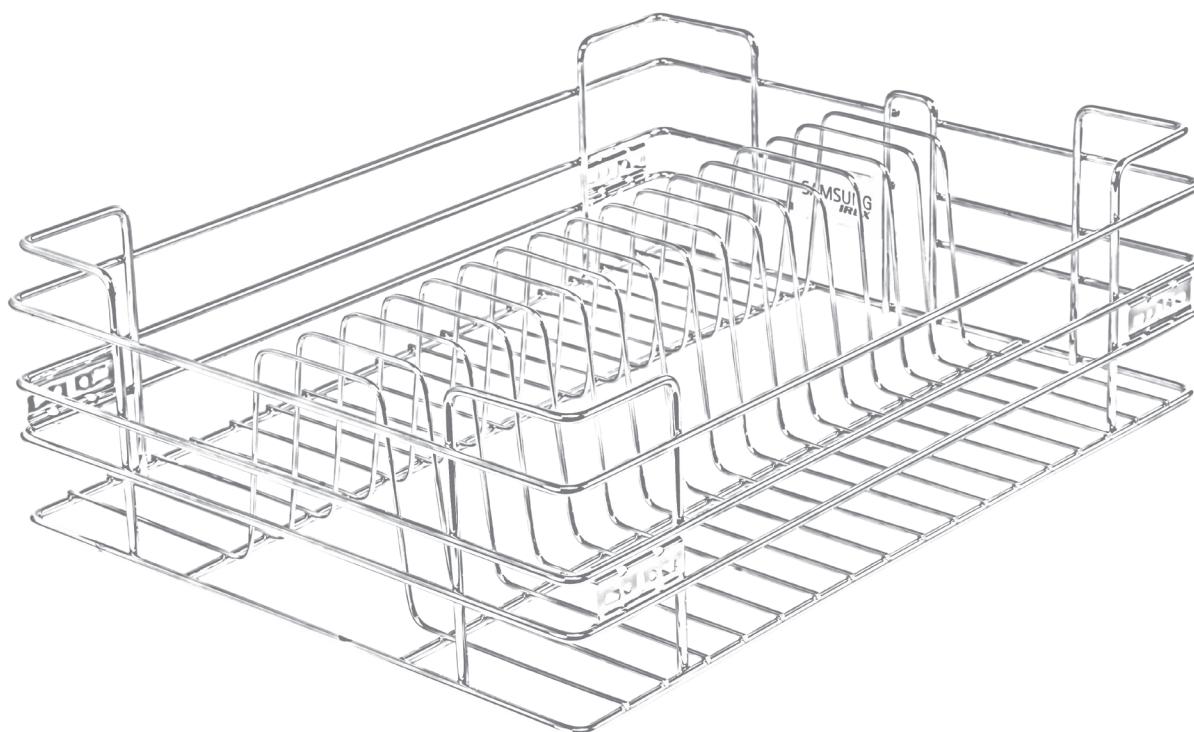


WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2013156	15x20x6	1	Pc	4
2013176	17x20x6	1	Pc	4
2013196	19x20x6	1	Pc	4
2013216	21x20x6	1	Pc	4
2013246	24x20x6	1	Pc	4

VEGETABLE BASKET




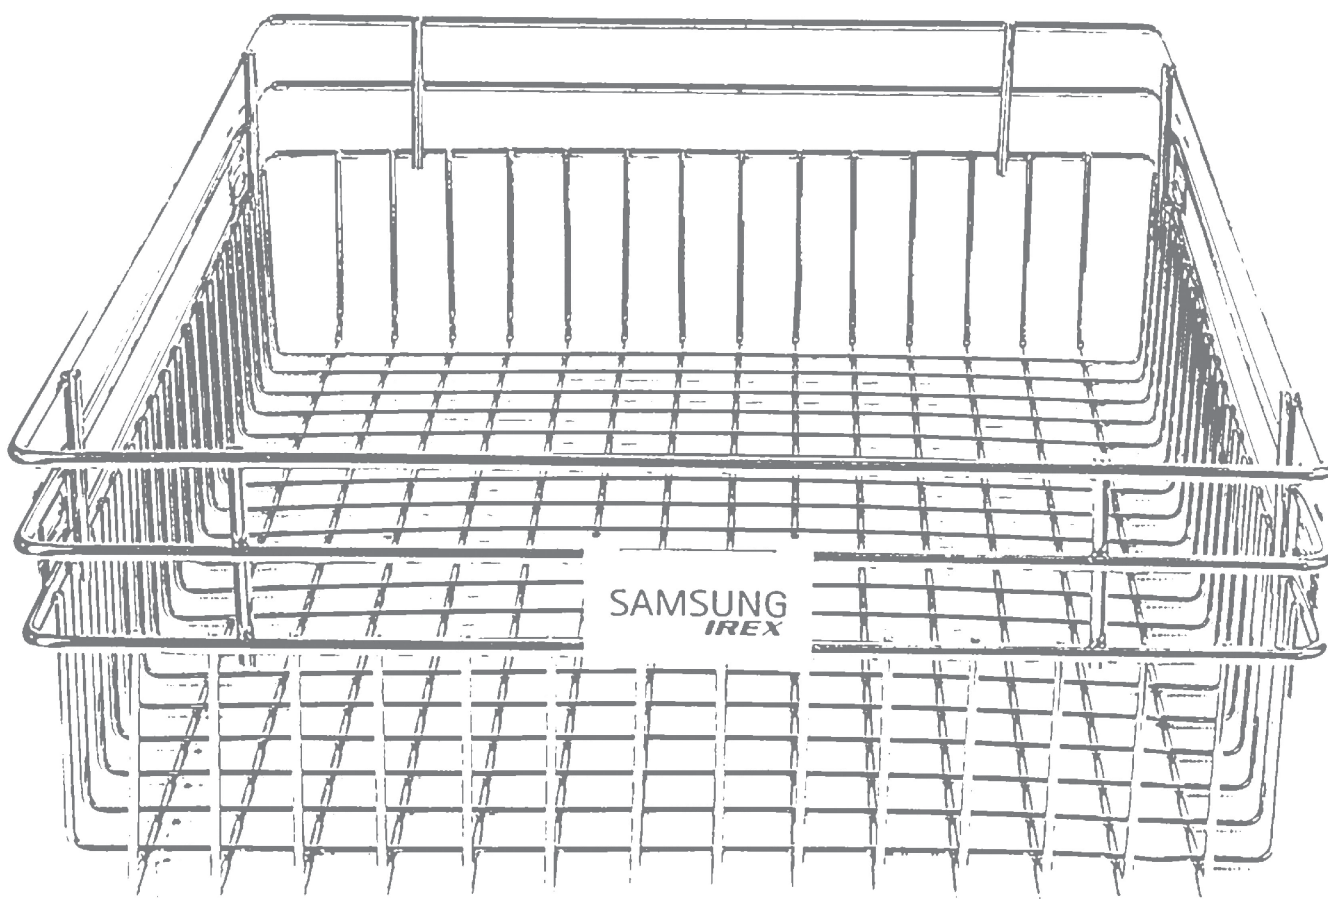


WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2015156	15x20x6	1	Pc	4
2015176	17x20x6	1	Pc	4
2015196	19x20x6	1	Pc	4
2015216	21x20x6	1	Pc	4
2015246	24x20x6	1	Pc	4

GRAIN TROLLEY

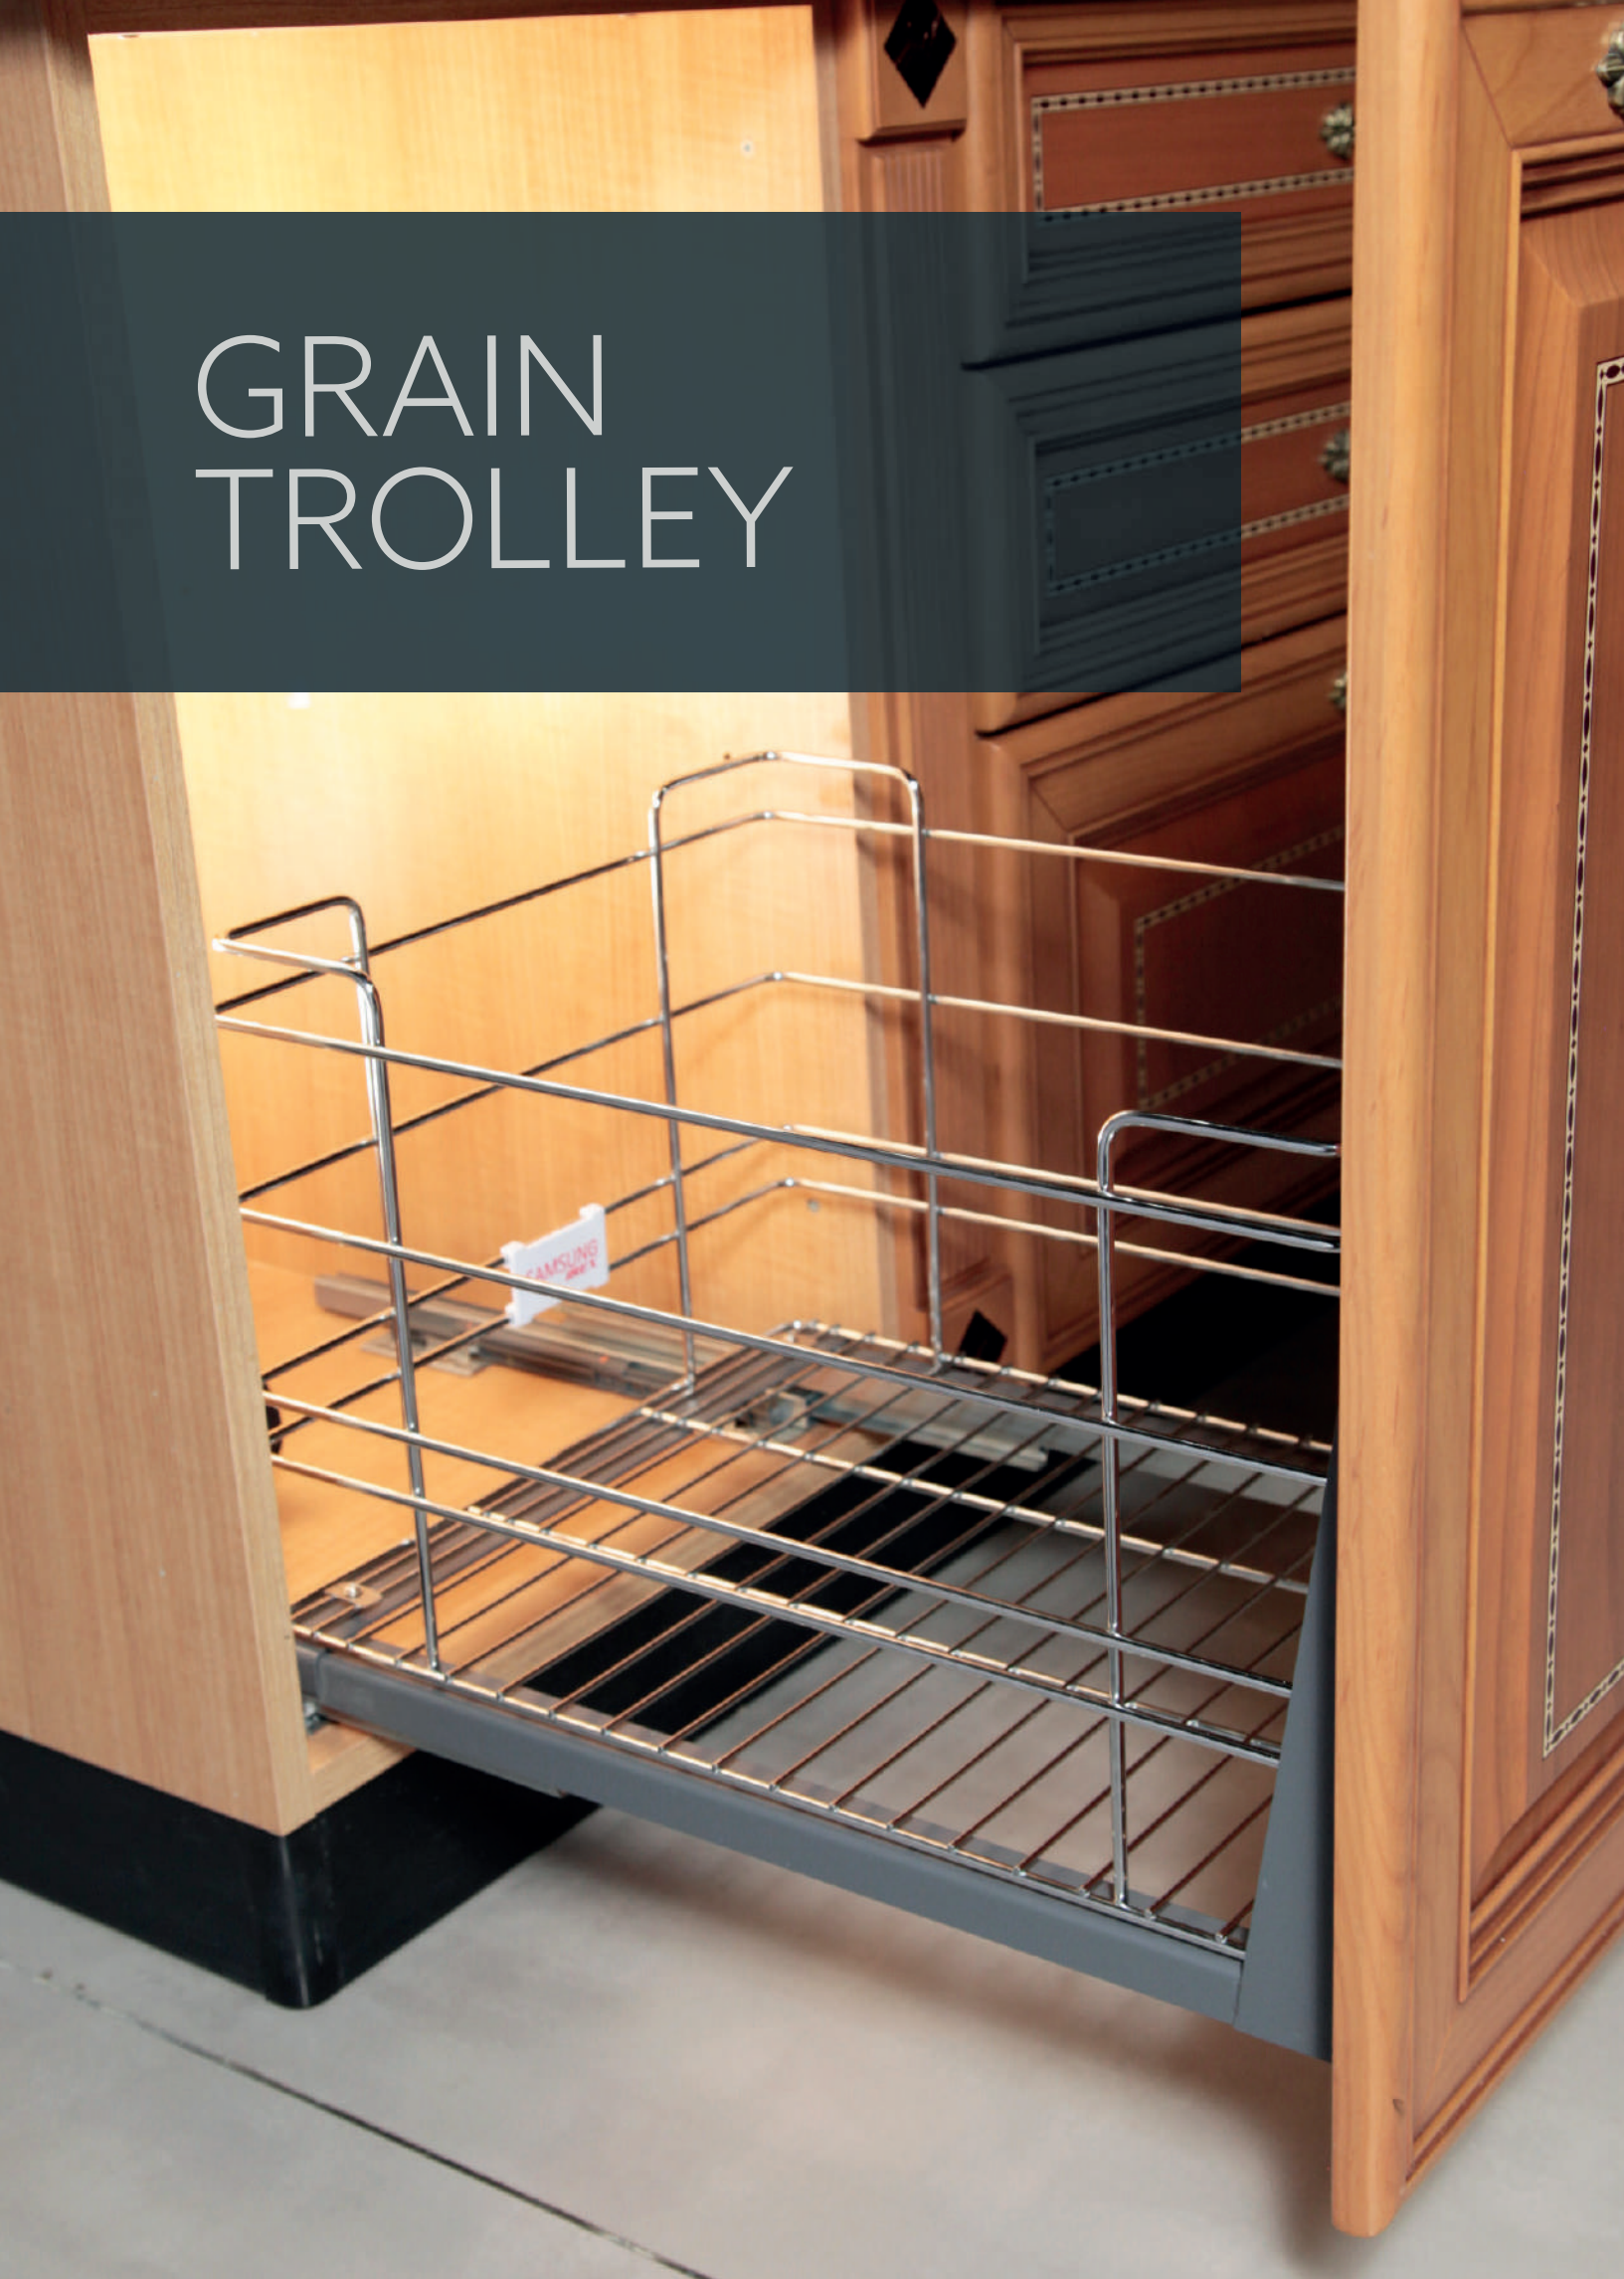

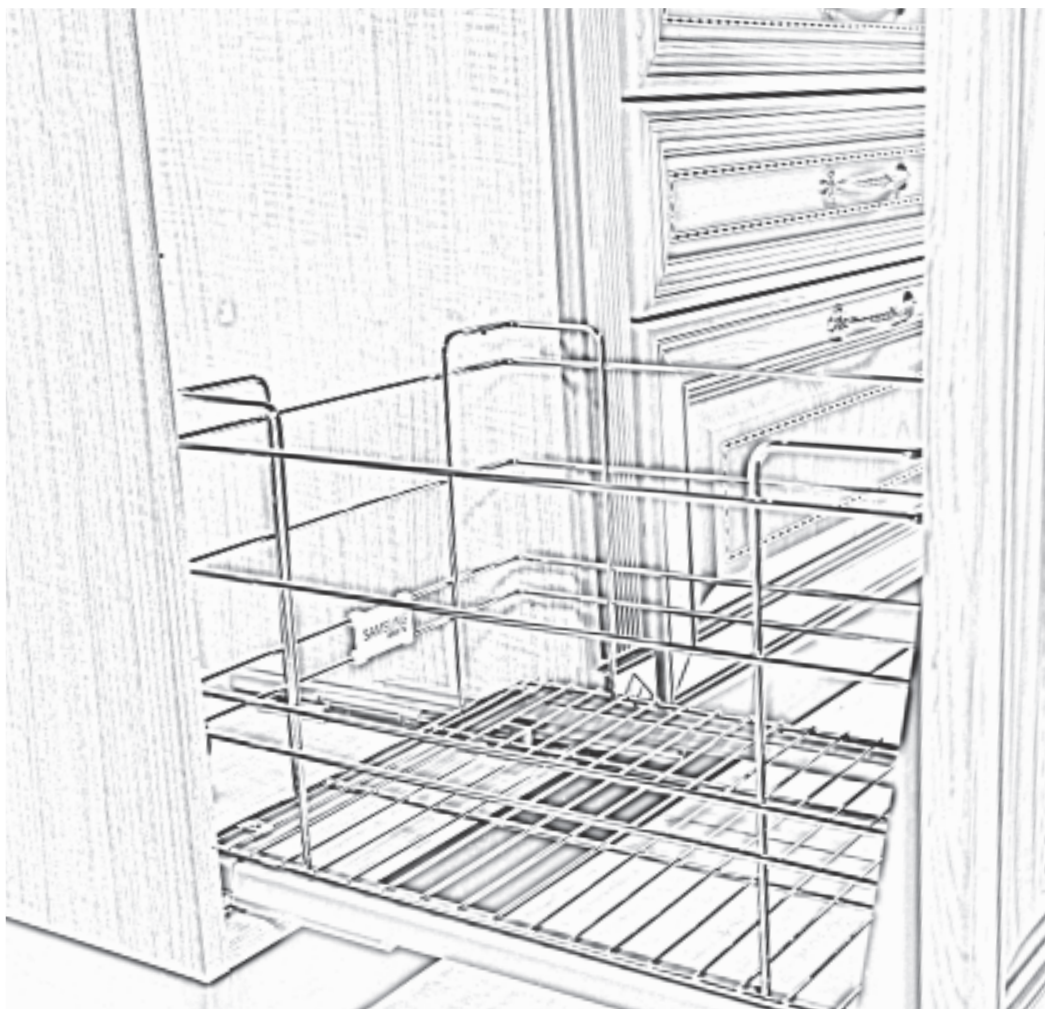

WIRE BASKET


ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2016150	15x20x14	1	Pc	1
2016170	17x20x14	1	Pc	1
2016190	19x20x14	1	Pc	1
2016210	21x20x14	1	Pc	1

**GRAIN TROLLEY WITH S/C
UD RAIL MECHANISM**



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2016151	15x20x14	1	Pc	1
2016171	17x20x14	1	Pc	1
2016191	19x20x14	1	Pc	1
2016211	21x20x14	1	Pc	1

GRAIN TROLLEY WITHOUT FRAME

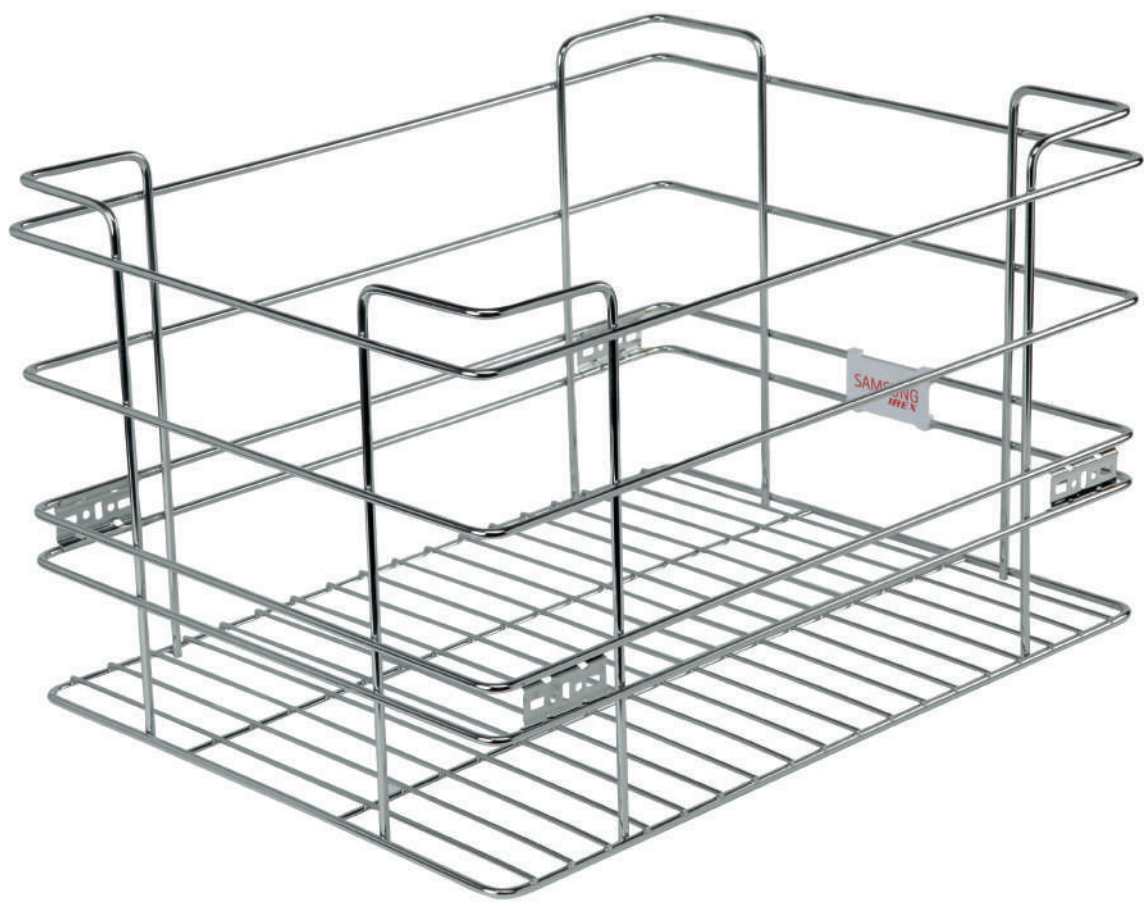

WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2016152	15x20x14	1	Pc	1
2016172	17x20x14	1	Pc	1
2016192	19x20x14	1	Pc	1
2016212	21x20x14	1	Pc	1

WIRE BOTTLE PULL OUT






WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2017100	4 Inch	1	Pc	1
2017150	6 Inch	1	Pc	1
2017200	8 Inch	1	Pc	1
2017250	10 Inch	1	Pc	1

MASALA PULL OUT



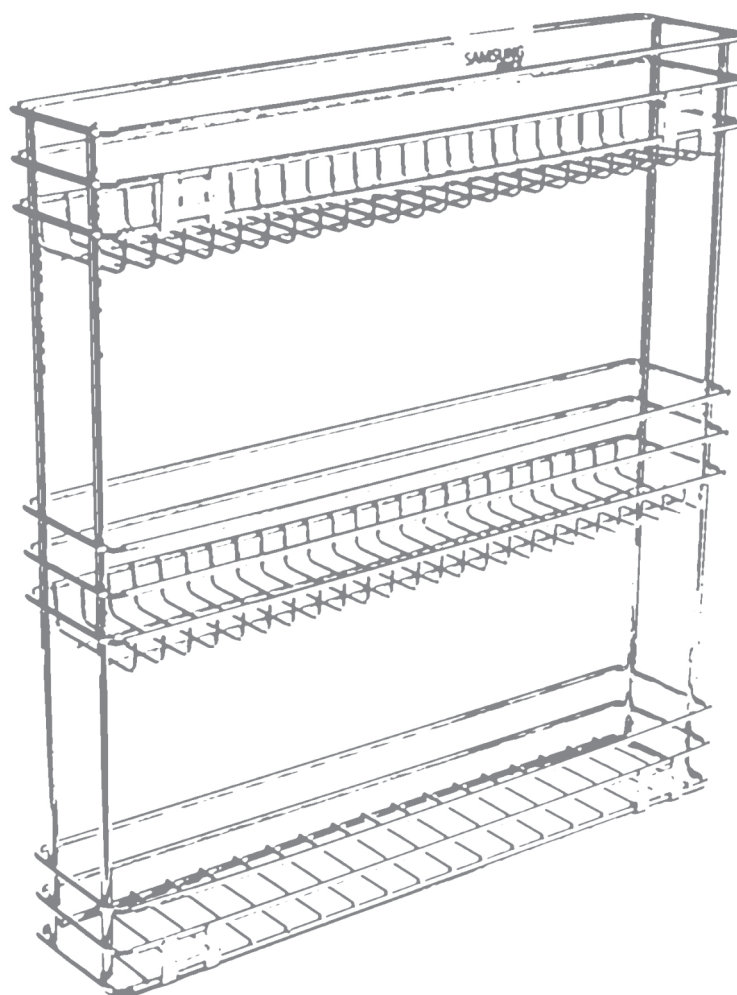


WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2018100	4 Inch	1	Pc	1
2018150	6 Inch	1	Pc	1
2018200	8 Inch	1	Pc	1
2018250	10 Inch	1	Pc	1

3/4TH WIRE CAROUSEL (2 SHELVES)



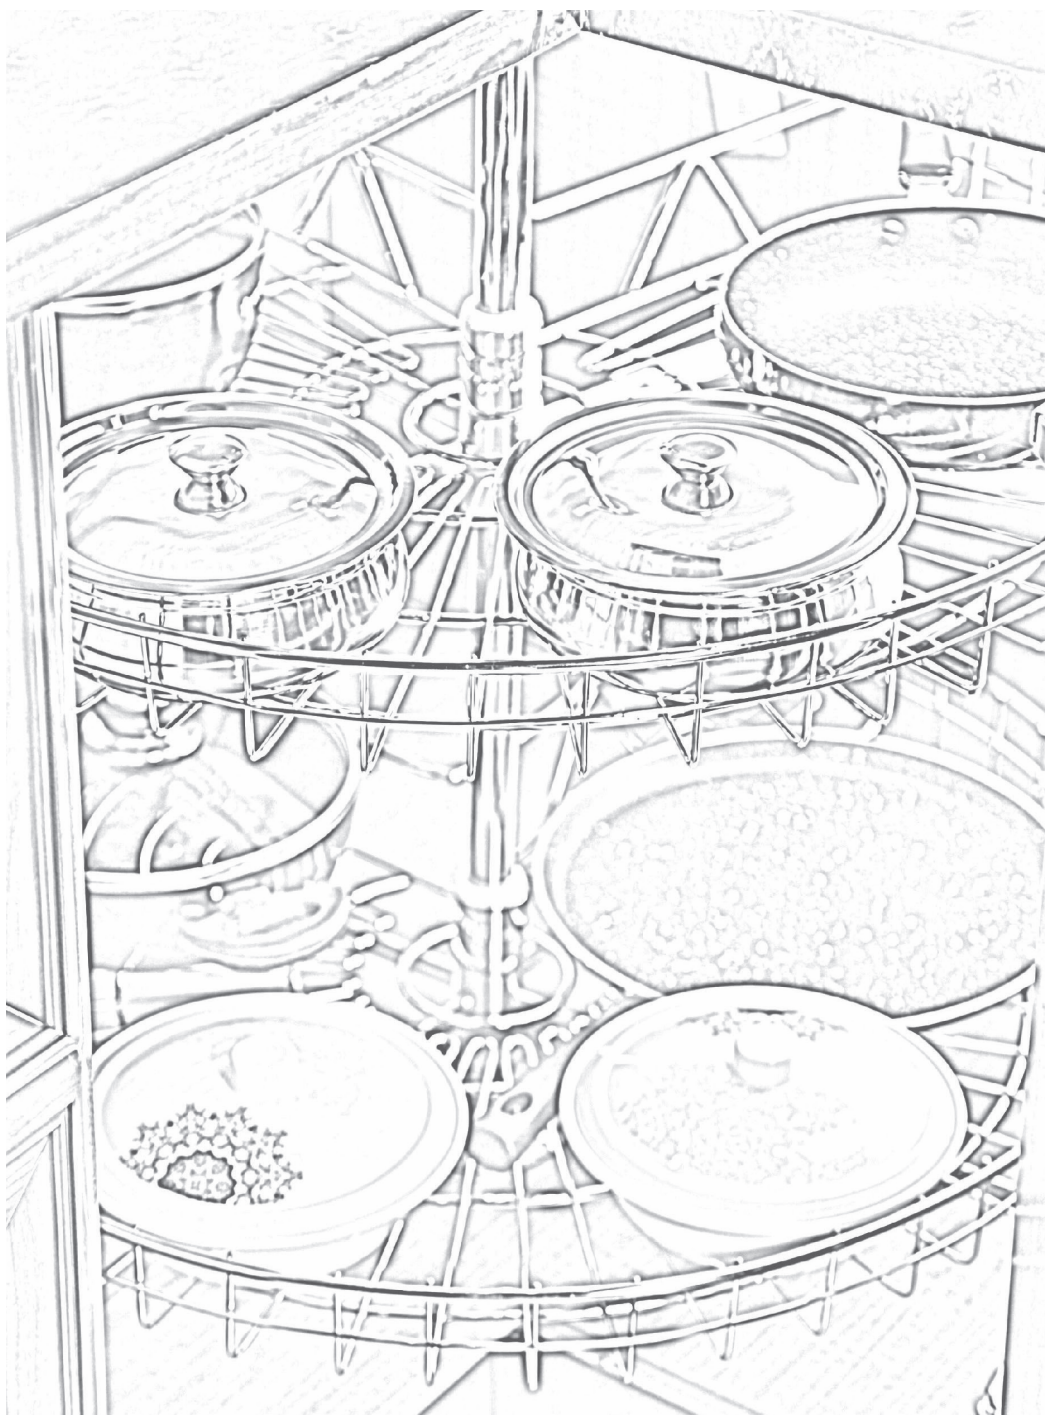

WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2022600	600mm	1	Pc	1
2022675	675mm	1	Pc	1
2022750	750mm	1	Pc	1

DETERGENT HOLDER



BIN HOLDER




CYLINDER TROLLEY



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2020001	Detergent Holder	1	Pc	1
2020002	Bin Holder	1	Pc	1
2020003	Cylinder Trolley	1	Pc	1

WIRE BASKET

PARTITION DIVIDER

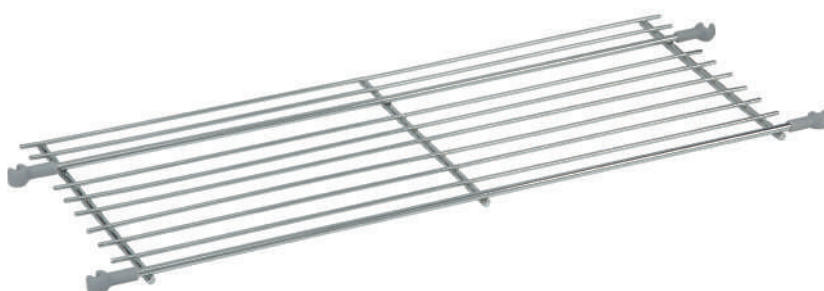

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2014004	20x4	1	Pc	1
2014006	20x6	1	Pc	1
2014008	20x8	1	Pc	1



PERFORATED CUTLERY BASKET




WIRE BASKET

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
2021154	15x20x4	1	Pc	6
2021174	17x20x4	1	Pc	6
2021194	19x20x4	1	Pc	6
2021214	21x20x4	1	Pc	6
2021244	24x20x4	1	Pc	6

KUM SERIES

KUM is a Korean word meaning Gold in English, which makes the nomenclature as Gold series. KUM series offers cost effective and cost engineered product range, which are Bottle pull out, pantry & corner solutions. Both the products are available in multiple sizes and two design options which are glass and tandem.

The product ranges are designed keeping aesthetics into consideration along with mats ensuring no movement of material kept inside while opening or closing the drawers or wardrobe.

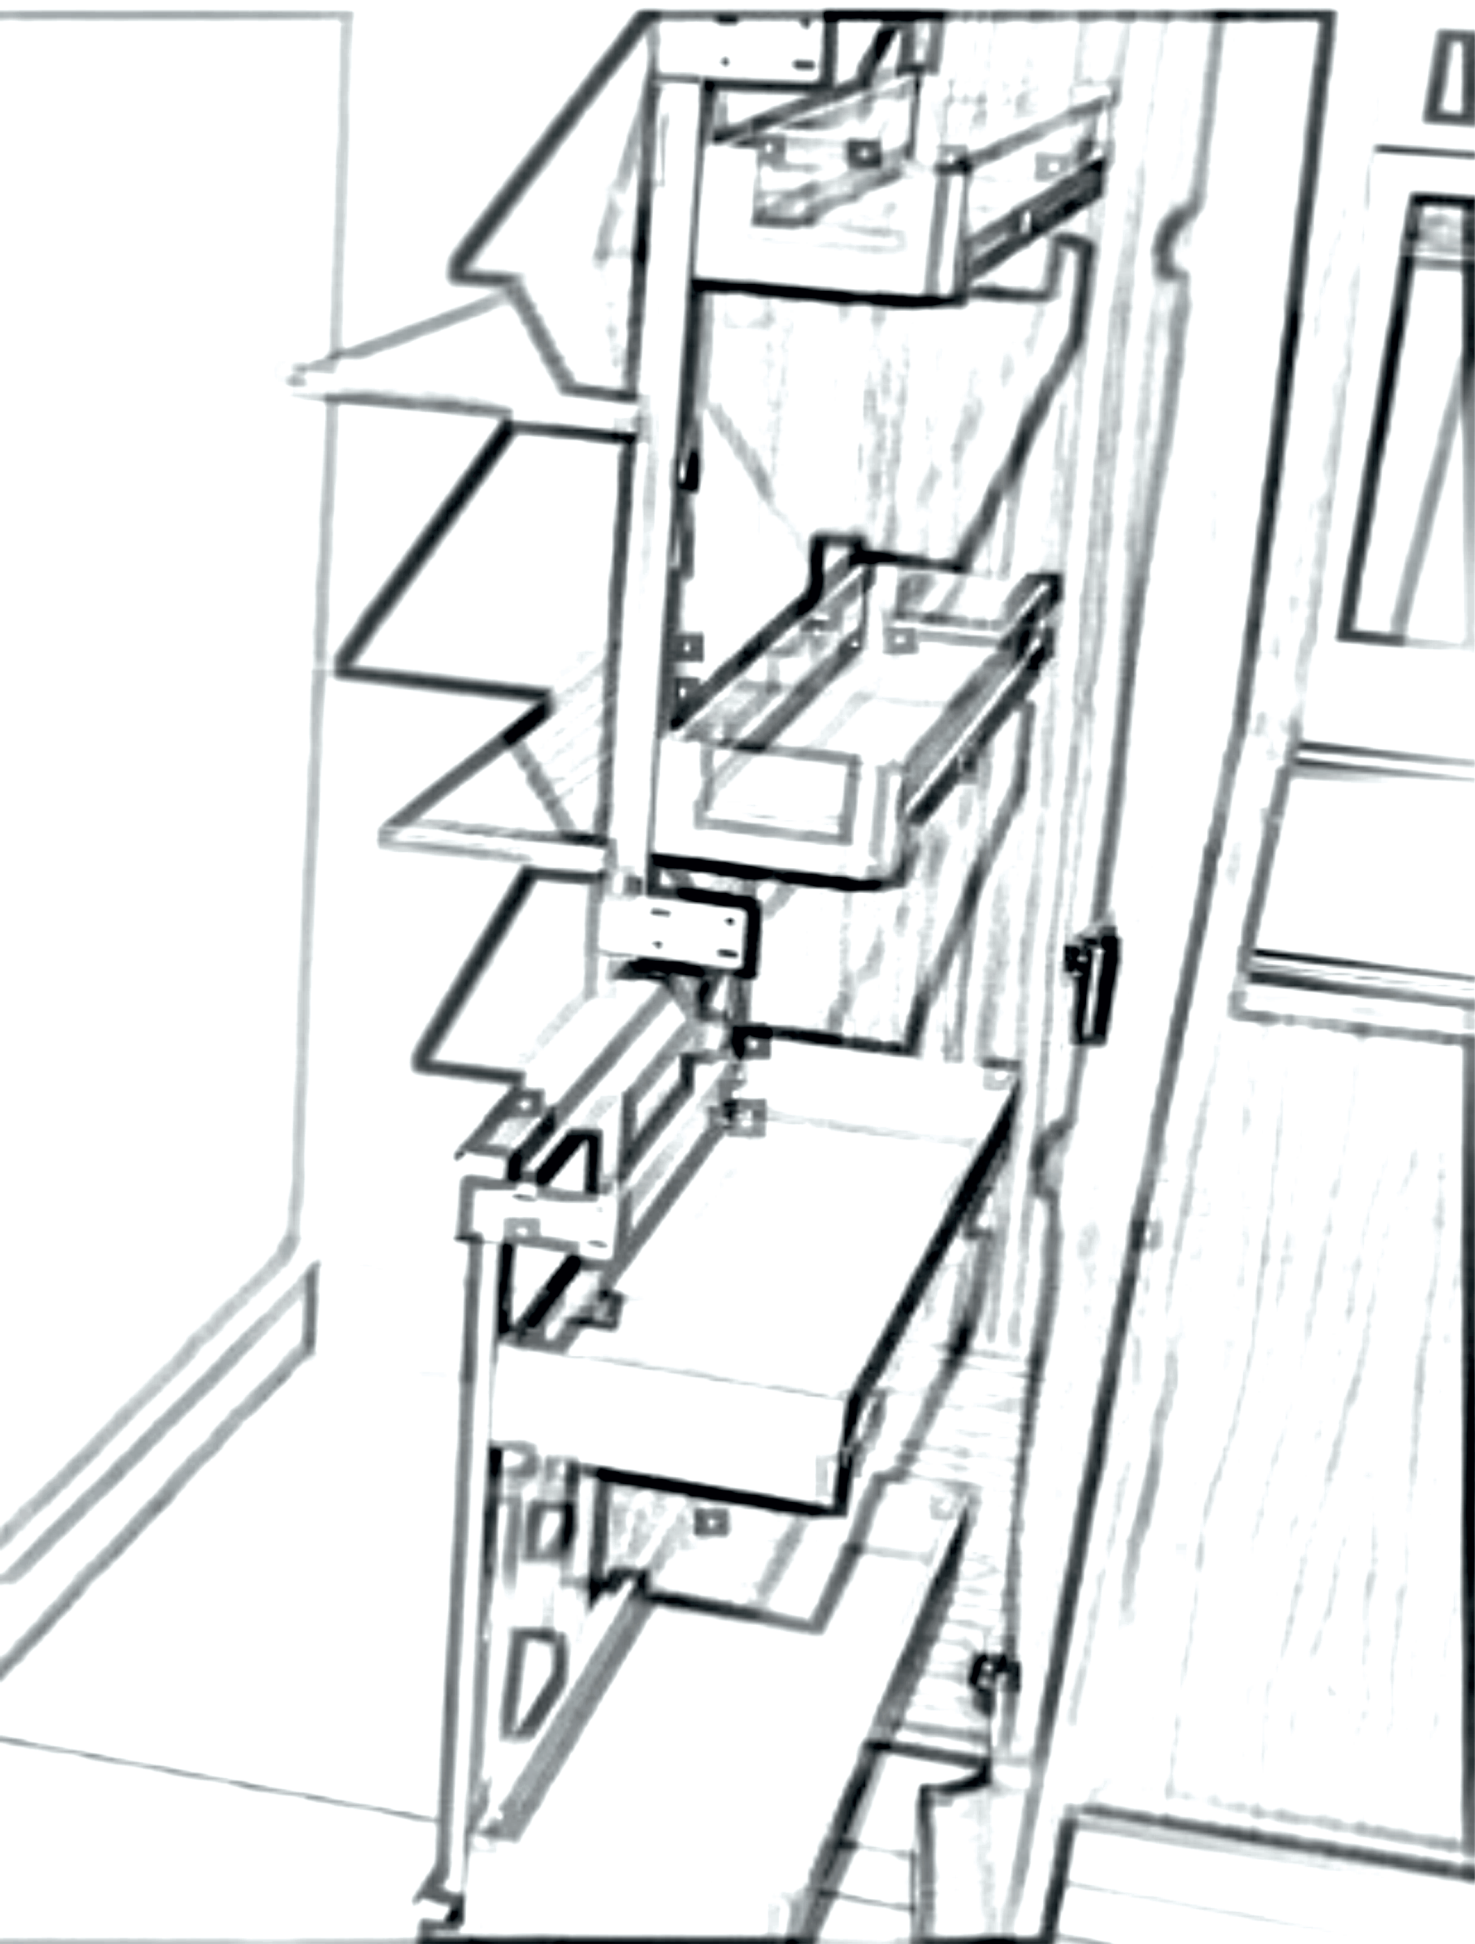

KUM

GLASS BOTTLE PULL OUT



* Basket Size : W-110, 160, 210 x D-468 x H-75mm

Size Specification (mm)

Cabinet Size	Product Size (WxDxH)	Description
200	160 x 485 x 495	2 - Layer
250	210 x 485 x 495	2 - Layer
300	260 x 485 x 495	2 - Layer

Special Features

- * Available in 2 Layer
- * Weight carrying capacity : 5 kg, Max 2.5 kg per basket recommended.
- * Baskets can be adjusted up & down.
- * Finish : Grey

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
3050200	200 mm (Glass Bottle Pullout)	1	Set	1
3050250	250 mm (Glass Bottle Pullout)	1	Set	1
3050300	300 mm (Glass Bottle Pullout)	1	Set	1

* Available in Both Left And Right Mounted Frames

TANDEM PULL OUT



- * Basket Size : W-110, 160, 210 x D-475 x H-70mm
- * Powder coating 60+ micron
- * Side Profile Thickness 6.5mm
- * Basket connecting corner ABS material
- * Profile Aluminum Grade 6063 T6

Size Specification (mm)

Cabinet Size	Product Size (WxDxH)	Description
200	160 x 485 x 495	2 - Layer
250	210 x 485 x 495	2 - Layer
300	260 x 485 x 495	2 - Layer


Special Features

- * Frame Material : MS with powder coating
- * Available in 2 Layer
- * Weight carrying capacity : 5 kg, Max 2.5 kg per basket recommended.
- * Baskets can be adjusted up & down.
- * Finish : Grey


ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
3070200	200 mm (Tandem Bottle Pullout)	1	Set	1
3070250	250 mm (Tandem Bottle Pullout)	1	Set	1
3070300	300 mm (Tandem Bottle Pullout)	1	Set	1

* Available in Both Left And Right Mounted Frames


Firstly unscrew
channel with Frame.

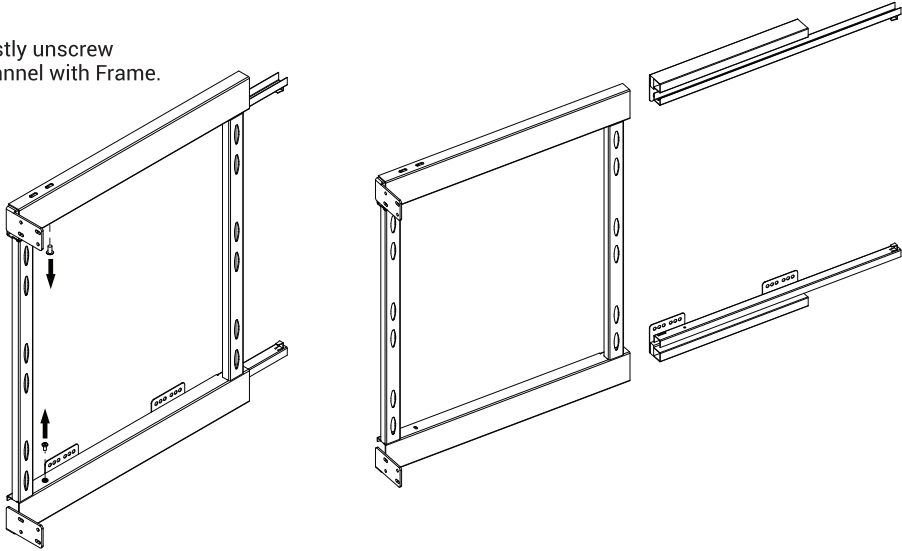



Flip the frame and
remove screw

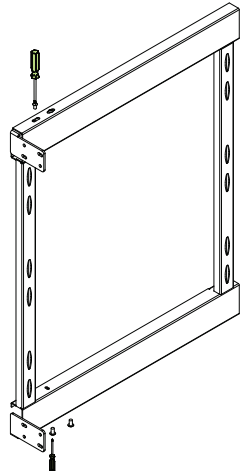

Detach shutter clamp

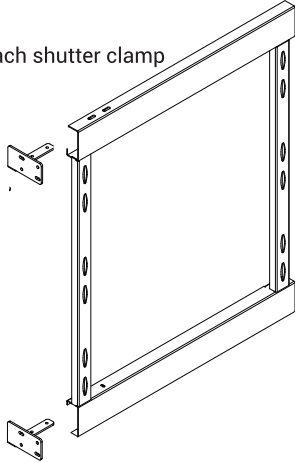

Fix Shutter Into Frame with
screw and tighten.

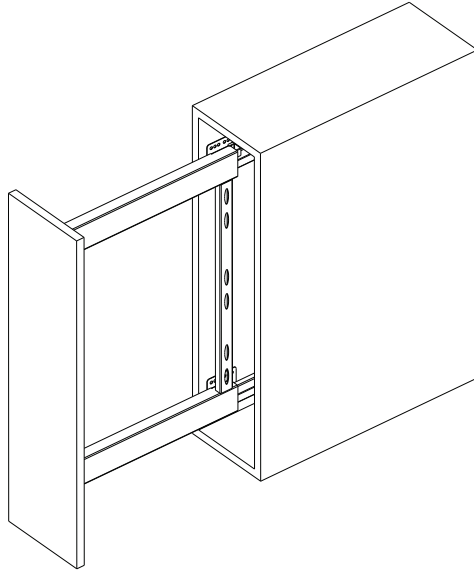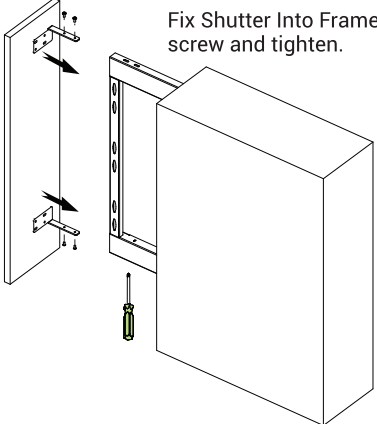

GLASS PANTRY PULL OUT



KUM

Size Specification (mm)

Cabinet Size	Product Size (WxDxH)	Description
450	380 x 510 x 1820	6 - Layer
600	480 x 510 x 1820	6 - Layer

Special Features

- * The front shelf swings open with the door and rear shelf is automatically drawn forward.
- * Baskets can be adjusted up & down.
- * Seamless motion and Soft Close opening.
- * Finish : Grey

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
3060450	450 mm (Damping Glass Pantry Pullout Full Height)	1	Set	1
3060600	600 mm (Damping Glass Pantry Pullout Full Height)	1	Set	1

TANDEM GALLERY PANTRY



Size Specification (mm)


Cabinet Size	Product Size (WxDxH)	Description
450	380 x 510 x 1820	6 - Layer
600	480 x 510 x 1820	6 - Layer

Special Features

- * Tandem Pantry Unit - Aluminum
- * Frame Material : MS with powder coating
- * The front shelf swings open with the door and rear shelf is automatically drawn forward.
- * Baskets can be adjusted up & down.
- * Seamless motion and Soft Close opening.
- * Finish : Grey


ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
3080450	450 mm (Damping Tandem Pantry Pullout Full Height)	1	Set	1
3080600	600 mm (Damping Tandem Pantry Pullout Full Height)	1	Set	1


TANDEM / GLASS PANTRY UNIT

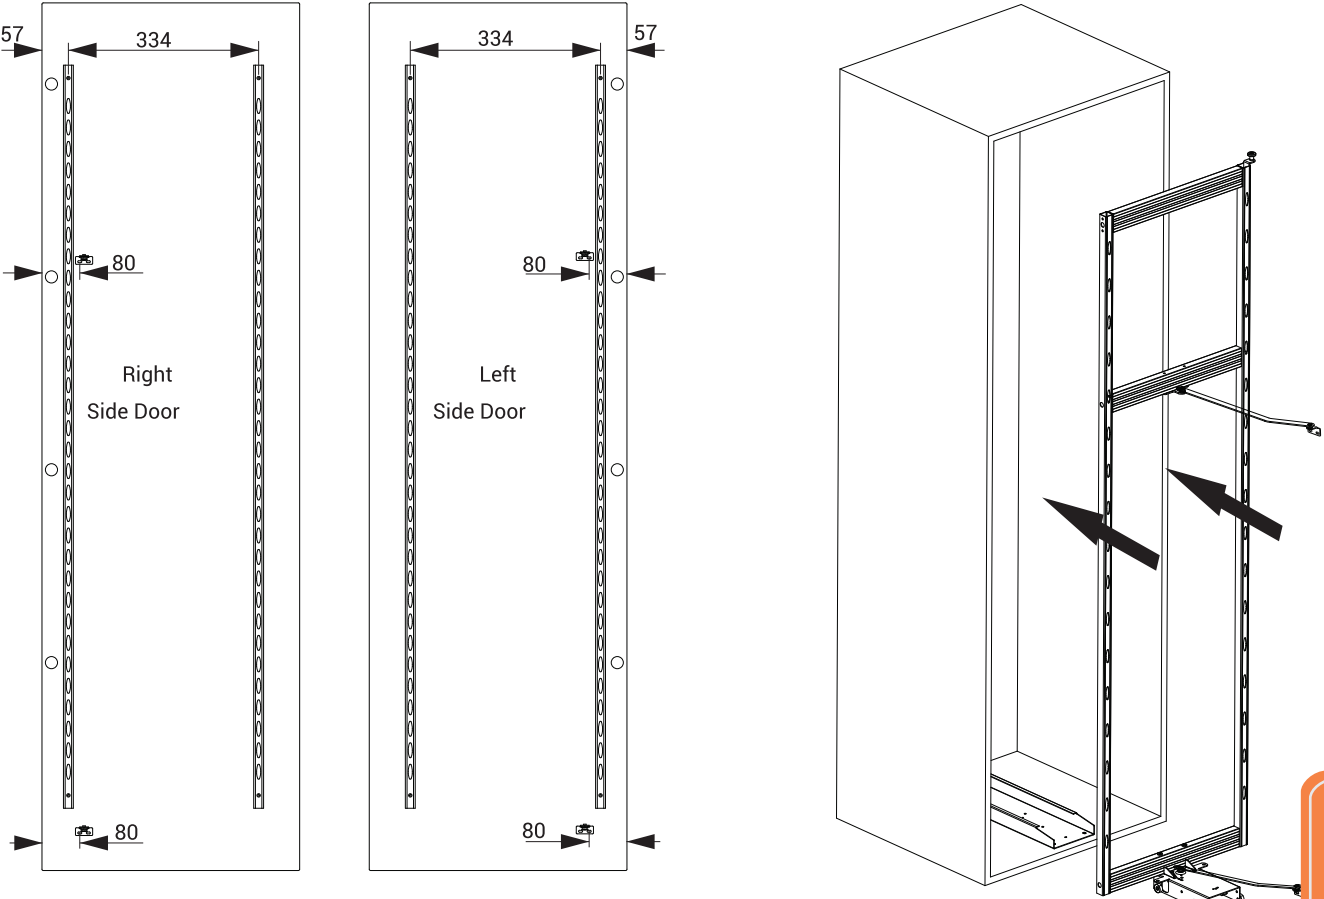

After fitting all parts check working

___Fix baskets according to your need

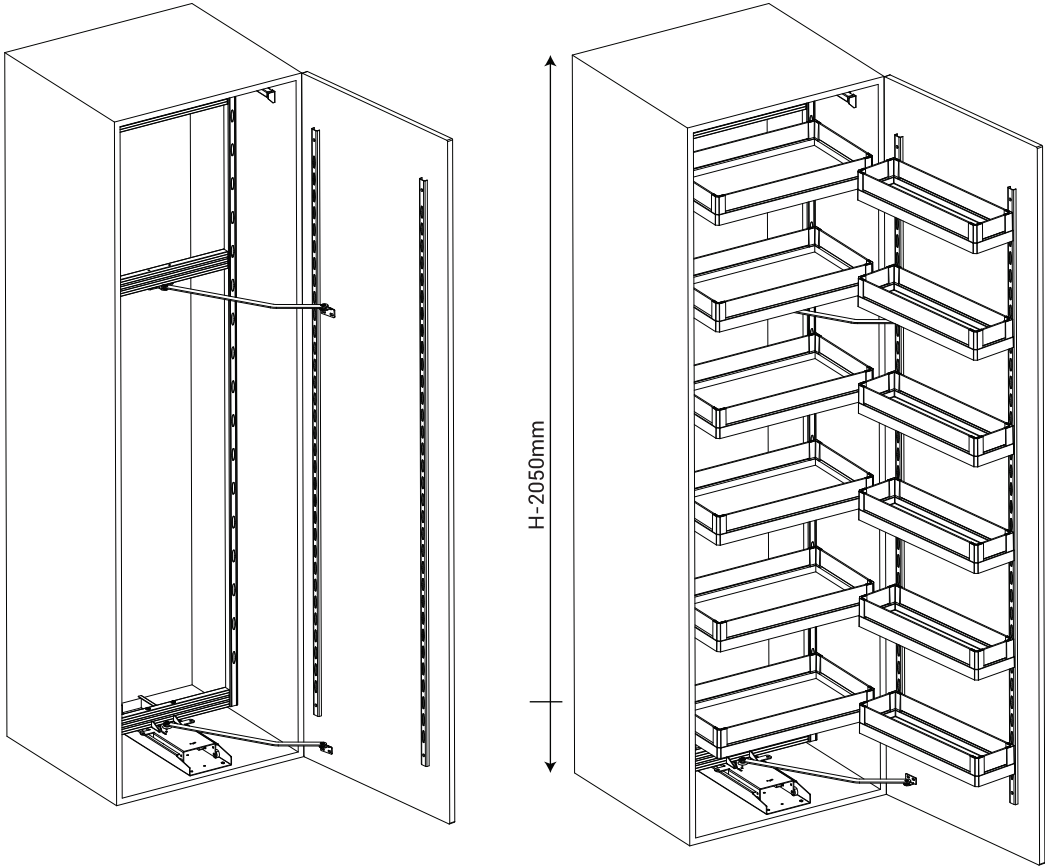

<div>  Weight Capacity </div>	
6 Layer	50 Kg.



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
3091450	Swing Tray - Left	1	Set	1
3092450	Swing Tray - Right	1	Set	1

SPECIFICATIONS

Size Specification (mm)

Dia. 815 x 400 x H-(600-700) = 2 Layer (Left - Right Opening)


Standard Cabinet

W-1050-1100mm x D-560mm x H-720mm

Special Features

- * Anti Slip Matt
- * Number of layers : 2
- * Eco friendly, space saving and convenient.
- * Door opening minimum space 450mm
- * Weight carrying capacity : 10 kg per single tray recommended.
- * Soft-close opening.
- * Finish : Grey

SWING TRAY

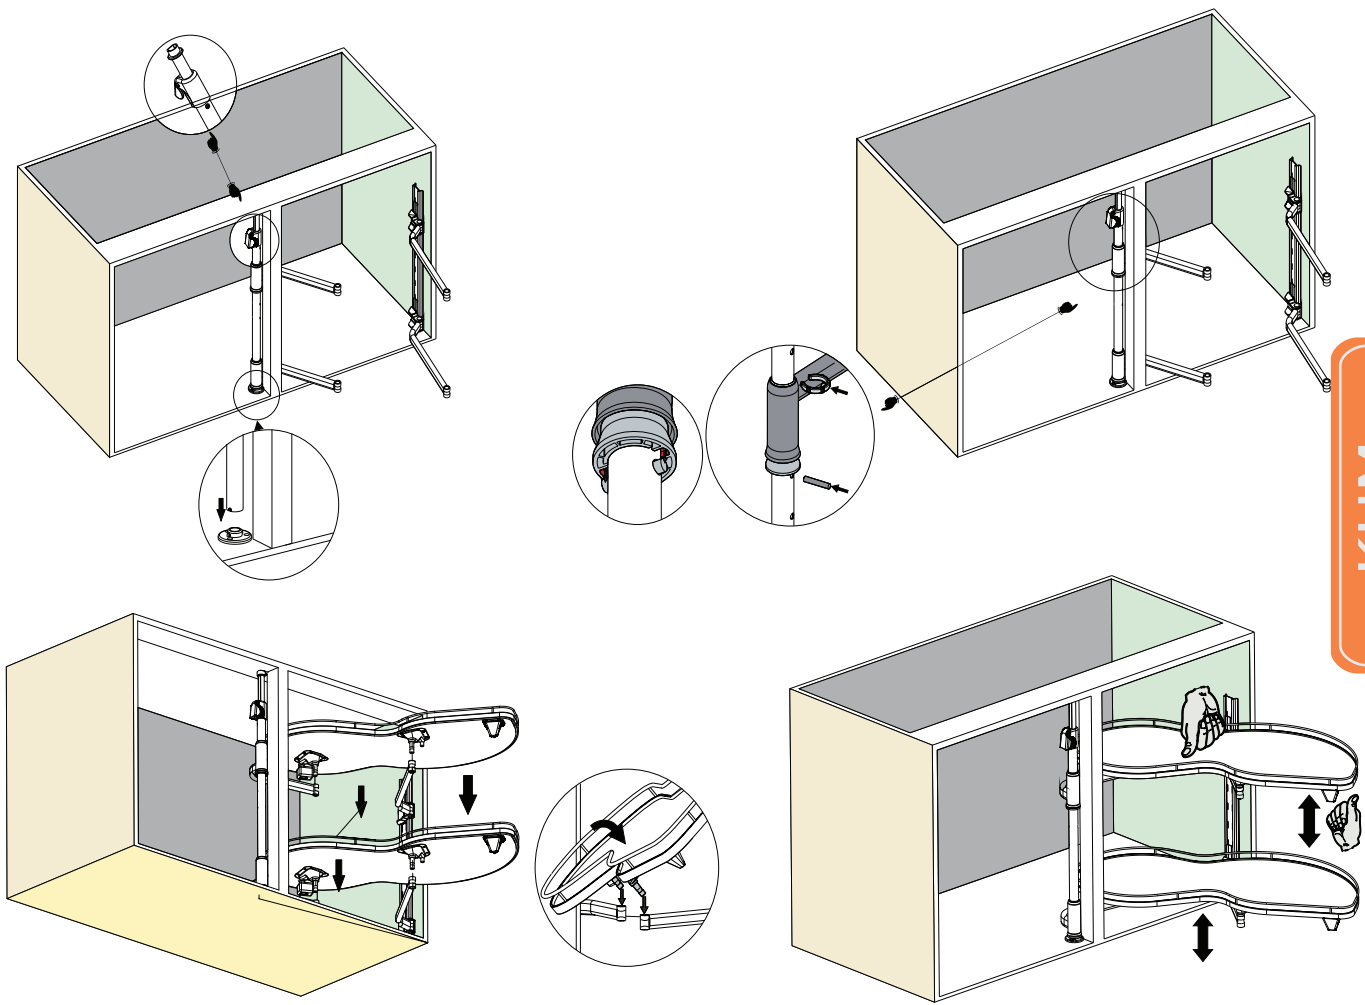

KUM



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
3093450	Magic Corner - Glass	1	Set	1
3094450	Magic Corner - Tandem	1	Set	1

SPECIFICATIONS

Magic Corner - Glass

* Basket Size - W-275 x D-445 x H-75mm

Size Specification (mm)

W-660 x D-515 x H-600 - Universal

Standard Cabinet

W-1050-1100mm x D-560mm x H-720mm

Special Features

- * Frame Material : MS with powder coating
- * This elegant corner brings 4 shelves side by side.
- * Door opening minimum space 450mm
- * Weight carrying capacity : 16 kg, Max 4 kg per basket recommended.
- * Seamless motion and Soft Close opening.
- * Finish : Grey

Magic Corner - Aluminum

* Basket Size - W-280 x D-450 x H-70mm

Size Specification (mm)

W-660 x D-515 x H-600 - Universal

Standard Cabinet


W-1050-1100mm x D-560mm x H-720mm

Special Features


- * Frame Material : MS with powder coating
- * Number of layers : 2
- * This elegant corner brings 4 shelves side by side.
- * Door opening minimum space 450mm
- * Weight carrying capacity : 16 kg, Max 4 kg per basket recommended.
- * Seamless motion and Soft Close opening.
- * Finish : Grey

MAGIC CORNER


Place Bottom Base As Given
Dimensions

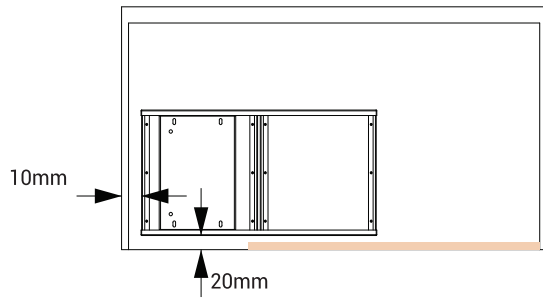


Fix Sliding Base

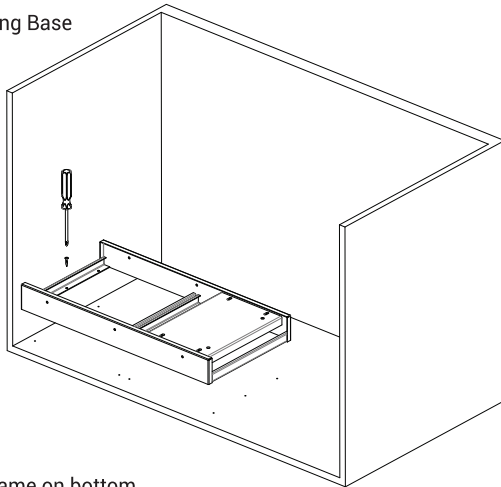


Place frame on bottom
base and fix with bolt

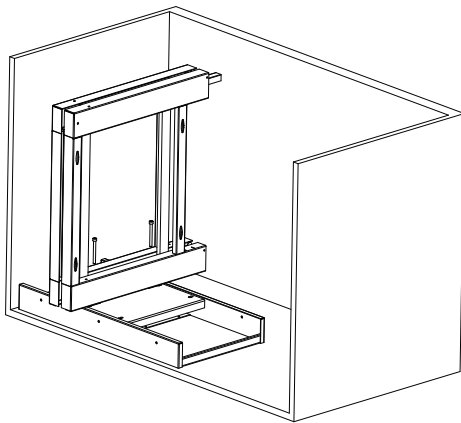

Fix handle as shown in drawing.

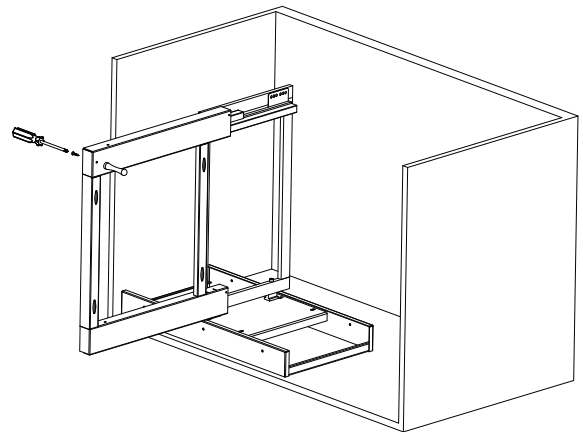

Hang baskets with hook,
Final movement check

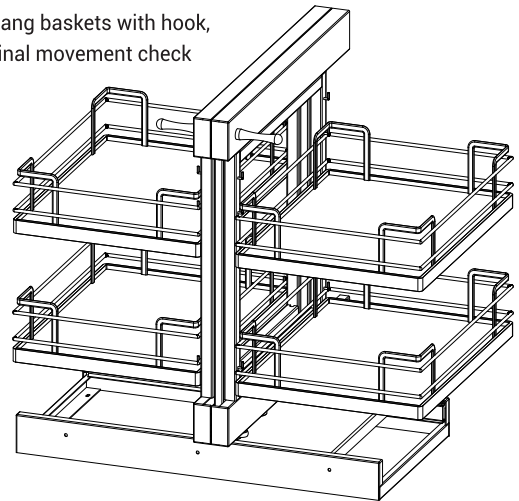

KUM

BAEKUM SERIES


Baekum in Korean represents Platinum. We offer premium range of products under baekum series which are categorized as pantry pull out solutions, Corner solutions, Stainless steel accessories and bottle pull out solutions. The products and solutions which we are offering are Dish racks, Complete pantry/Storage solutions in chrome finish, Corner solutions, Bottle pull outs in chrome finish, Stainless steel Cutlery tray, Plate rack, Waste bin pullout and Ecomat. In this as already mentioned, product comes in stainless steel material with a high quality Nickel-chrome plating. Aesthetics and functioning of products accordingly are superior and provides much ease in accessibility.




BAEKUM

STAINLESS STEEL DISH RACK



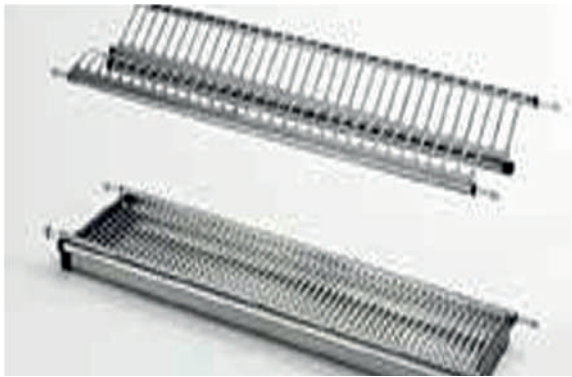

DIMENSION

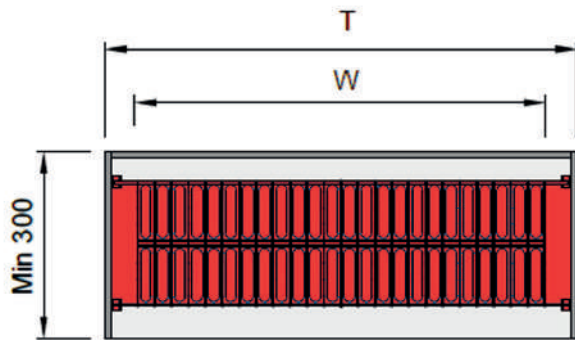

SPECIFICATIONS

Art No. - 4010600
Cabinet (T) - 600mm
Size (W, D, H) - 565 x 250 x(100+45)mm

Art No. - 4010700
Cabinet (T) - 700mm
Size (W, D, H) - 665 x 250 x(100+45)mm

Art No. - 4010800
Cabinet (T) - 800mm
Size (W, D, H) - 765 x 250 x(100+45)mm

Art No. - 4010900
Cabinet (T) - 900mm
Size (W, D, H) - 865 x 250 x(100+45)mm

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4010600	600mm	1	Pc	5
4010700	700mm	1	Pc	5
4010800	800mm	1	Pc	5
4010900	900mm	1	Pc	5


BAEKUM

DIAMOND PANTRY PULLOUT





DIMENSION

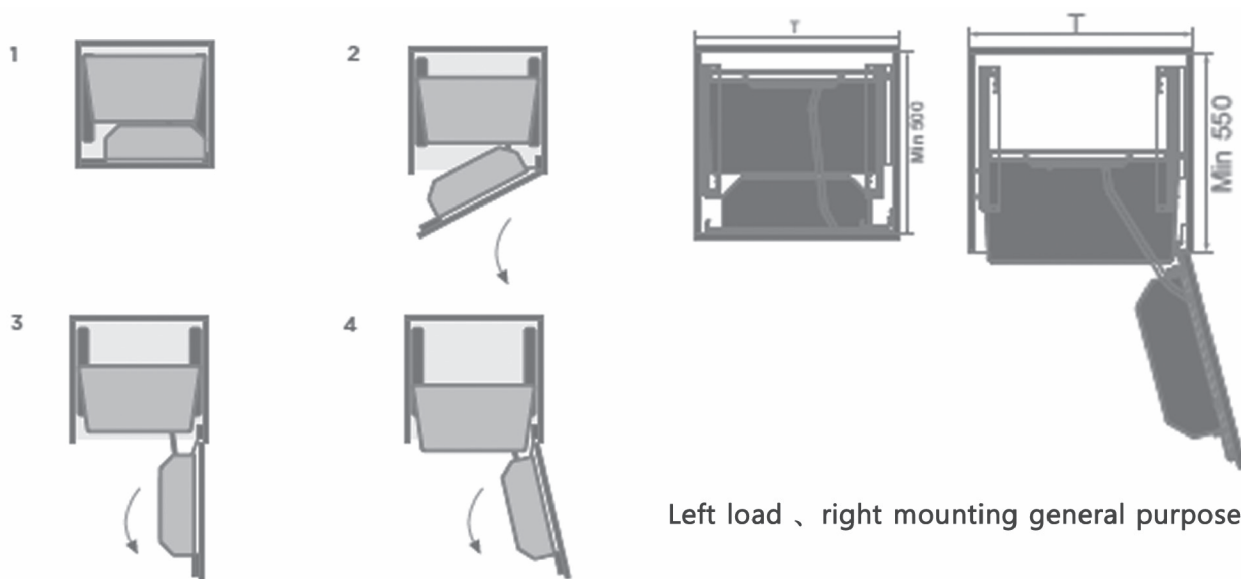

BAEKUM

SPECIFICATIONS


Art No. - 4011450
Cabinet (T) - 450/500mm
Size (W, D, H) - 385 x 500 x 1820mm
Description - Diamond tray 6 Layers

Art No. - 4011600
Cabinet (T) - 600mm
Size (W, D, H) - 535 x 500 x 1820mm
Description - Diamond tray 6 Layers


ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4011450	450mm	1	Set	1
4011600	600mm	1	Set	1

PREMIUM BOTTLE PULLOUT



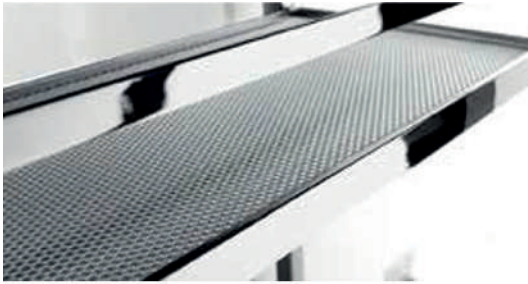

DIMENSION

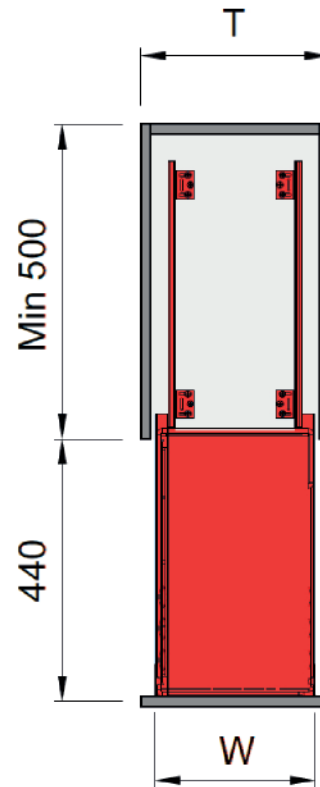

SPECIFICATIONS

Art No. - 4012200
 Cabinet Width - 200mm
 Size (W, D, H) - 135 x 460 x 580mm
 Description - Tray Basket Diamond Style
 2 layers of wooden trays
 Anti Slip Mat
 Soft Close
 Left mounting

Art No. - 4012300
 Cabinet Width - 300mm
 Size (W, D, H) - 235 x 460 x 580mm
 Description - Tray Basket Diamond Style
 2 layers of wooden trays
 Anti Slip Mat
 Soft Close
 Left mounting

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4012200	200mm	1	Set	1
4012300	300mm	1	Set	1

BAEKUM

PULLOUT WASTE BIN






SPECIFICATIONS

Art No. - 4013400
Cabinet (W) - 400mm
Size (W, D, H) - 345 x 500 x 310mm
Description - with 2 Barrel 15L each box
Base mounting

DIMENSION

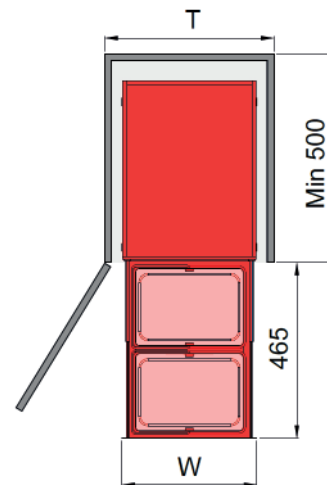

BAEKUM

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4013400	Pull out waste bin (15 Ltr x 2)	1	Set	1

AUTO LID WASTE BIN





SPECIFICATIONS

Art No. - 4013000

Cabinet (W) - 400mm

Description - with Barrel 10L capacity

BAEKUM

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4013000	Auto Lid waste bin (10 Ltr)	1	Pc	8

PLATE RACK



ARTICLE CODE

DESCRIPTION

QTY.

UNIT

PU

4014100

Plate Rack

1

Pc

1

S S CUTLERY



ARTICLE CODE

DESCRIPTION

QTY.

UNIT

PU


4015600

450mm

1

Pc


1

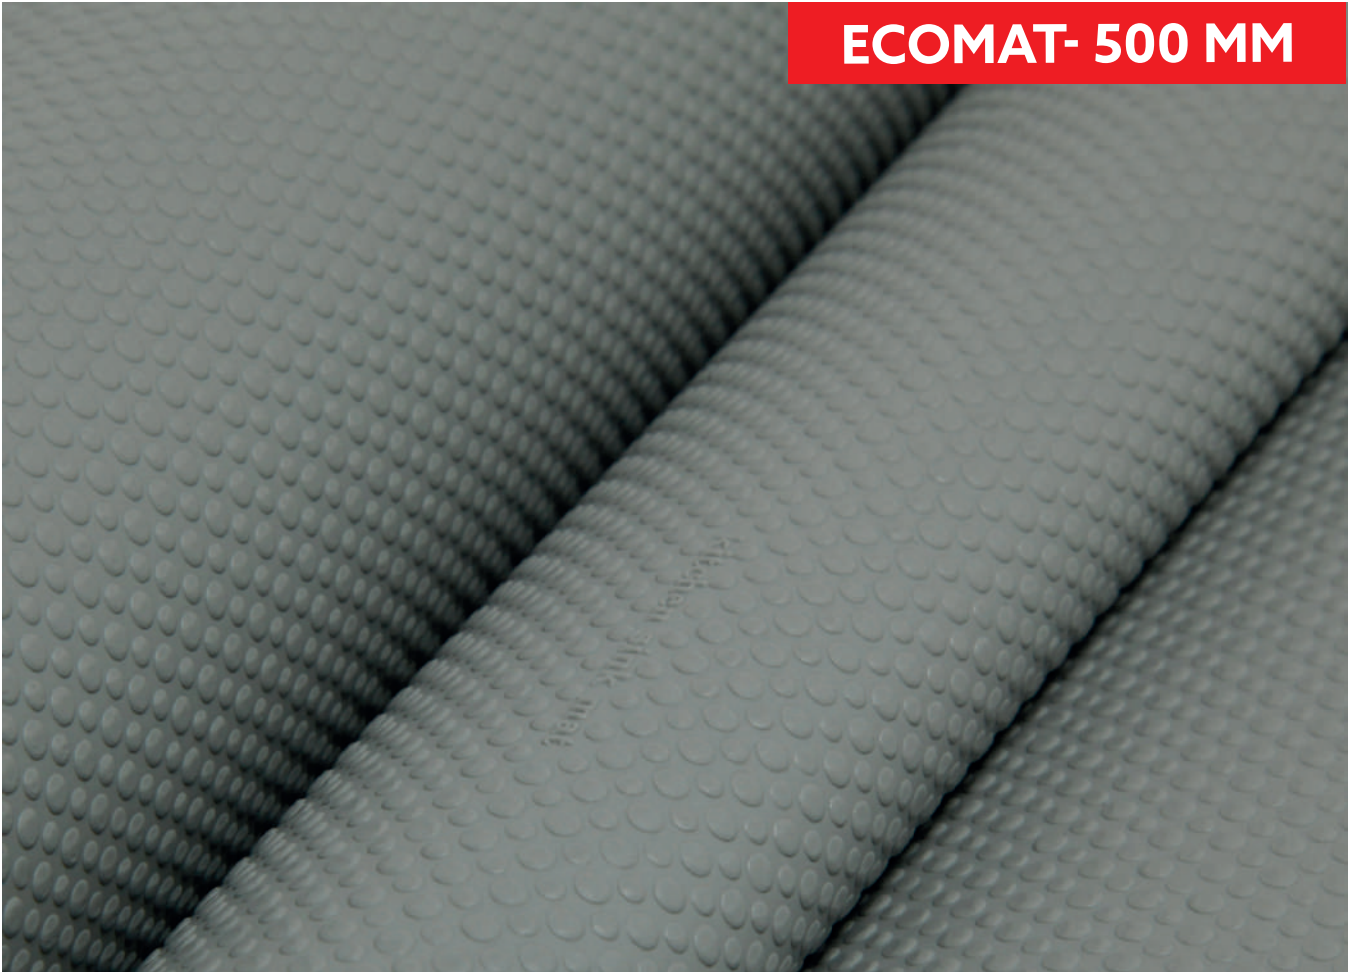

ECOMAT- 500 MM

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4016500	500 x 5000 mm	1	Pc	1

BAEKUM

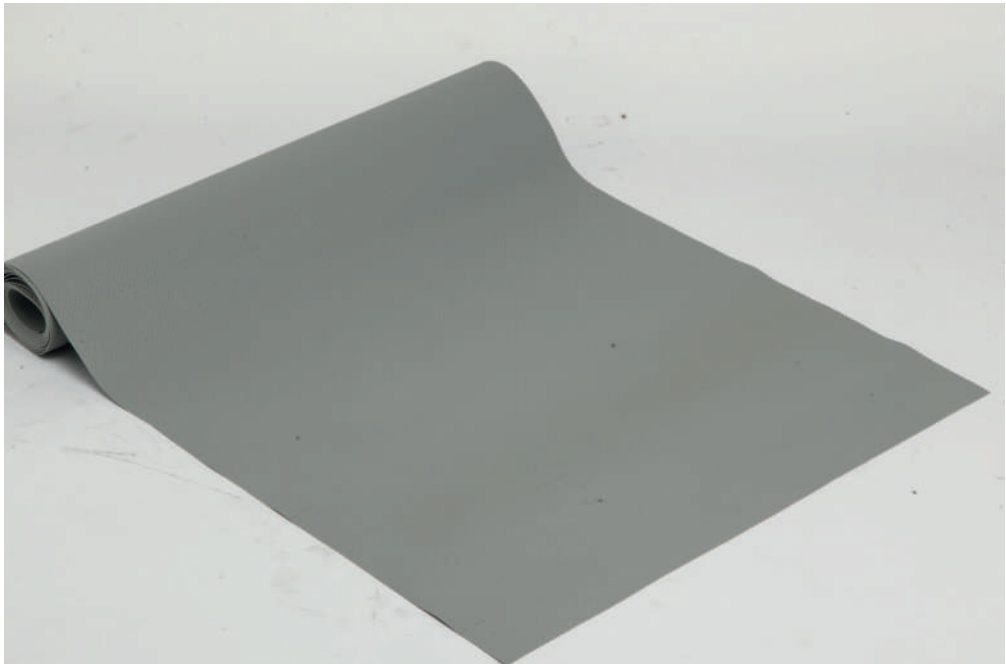



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4017000	Maseoli Tray Soft Close (Universal)	1	Pc	1
4018000	Maseoli Magic Soft Close (Universal)	1	Pc	1

SPECIFICATIONS

Art No. - 4017000


Carcass Width - 1050mm

Shutter Width - 450mm

Description - 2 layers of wooden trays
- Soft Close



BAEEKUM

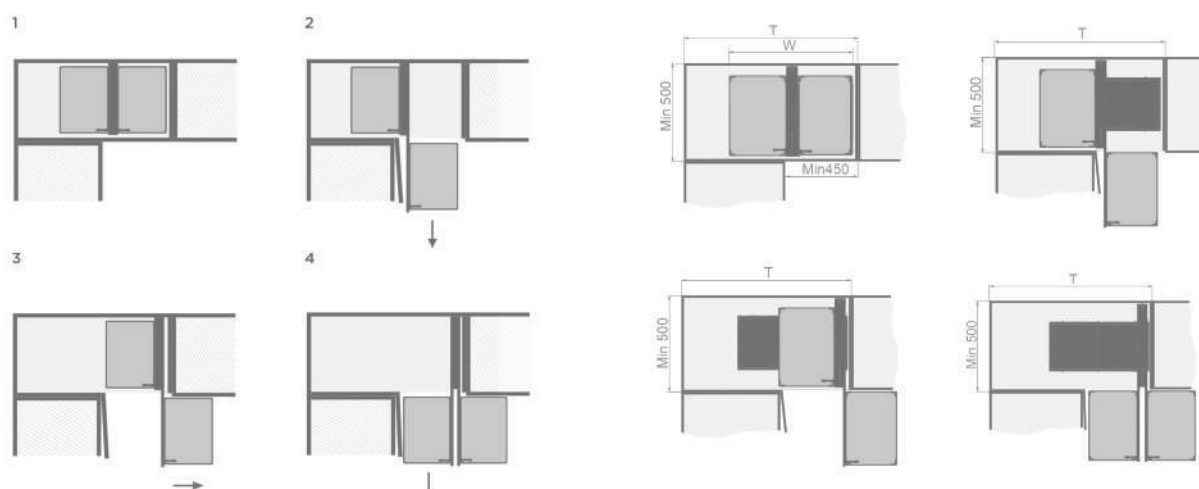

SPECIFICATIONS

Art No. - 4018000

Carcass Width - 1050mm

Shutter Width - 450mm

Description - Diamond trays

2 layers of wooden trays

Anti slip mat and soft close


SAMSUNG IREX

BUTT HINGES

Unlike furniture hardware, butt hinges fall under the category of architectural hardware. They are generally used to mount and operate the doors and windows onto a place for their easy movements. Butt hinges are available in multiple sizes and material. We provide the butt hinges under two ranges SS 304 and SS 202 grades with ball bearing mechanism. Under ball bearing hinges butt hinges are available in two sizes of 4 and 5.

Another range under this product category are butt hinges without ball bearing mechanism which further are available in three sizes of 3, 4 and 5.

BUTT HINGES

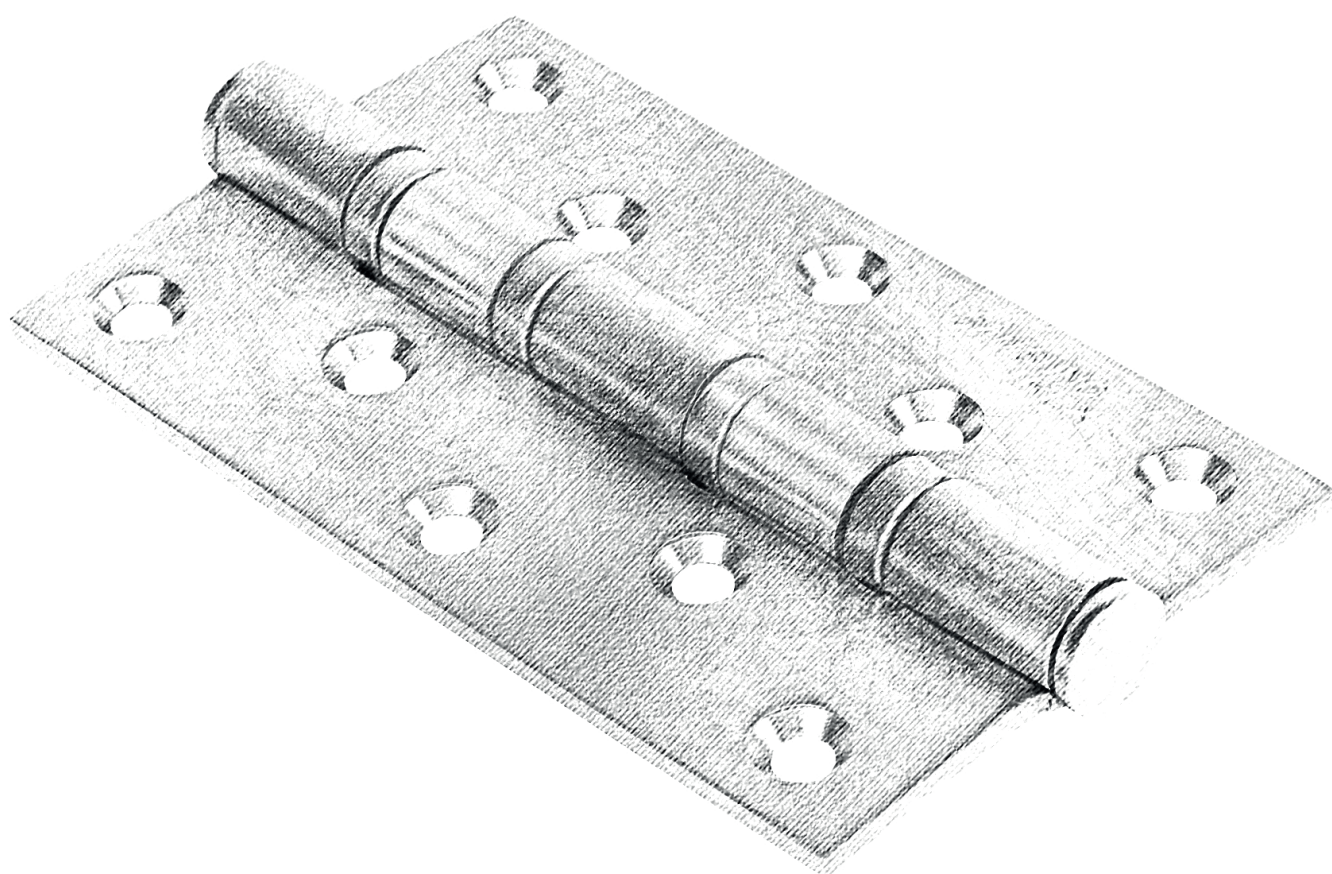



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1060433	Butt hinges with bearing- SS 304- 4x3x3	1	Set	25
1060533	Butt hinges with bearing- SS 304- 5x3x3	1	Set	25
1061433	Butt hinges with bearing- SS 202- 4x3x3	1	Set	25
1061533	Butt hinges with bearing- SS 202- 5x3x3	1	Set	25




BUTT HINGES

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
1062312 W	Butt hinges without bearing- SS 202- 3x12	1	Set	50
1062412 W	Butt hinges without bearing- SS 202- 4x12	1	Set	25
1062512 W	Butt hinges without bearing- SS 202- 5x12	1	Set	25

BED FITTING



BED FITTING

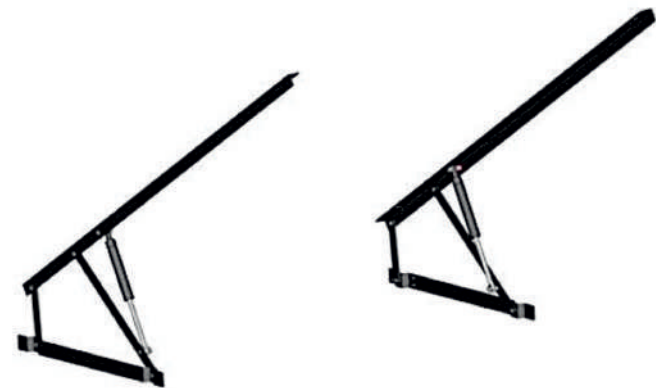

Special Features


- Ideal for storage under bed.
- Special Gas Spring available in five different loads.
- 36° opening angle allows easy access.

Fitting Instructions

- Fix the Fix Plate(A) on side of the bed as per given dimension (Ref fig no. '1') without the Gas Spring fitted.
- Now fit the bed platform to the Angle (B) Right & Left (Ref fig no. '2')
- Lastly fit the Gas Spring as shown in diagram (Ref Detail D1 & D3).

Special Notes

- Installation Dimensions are only recommendation and will vary depending on type of construction design.

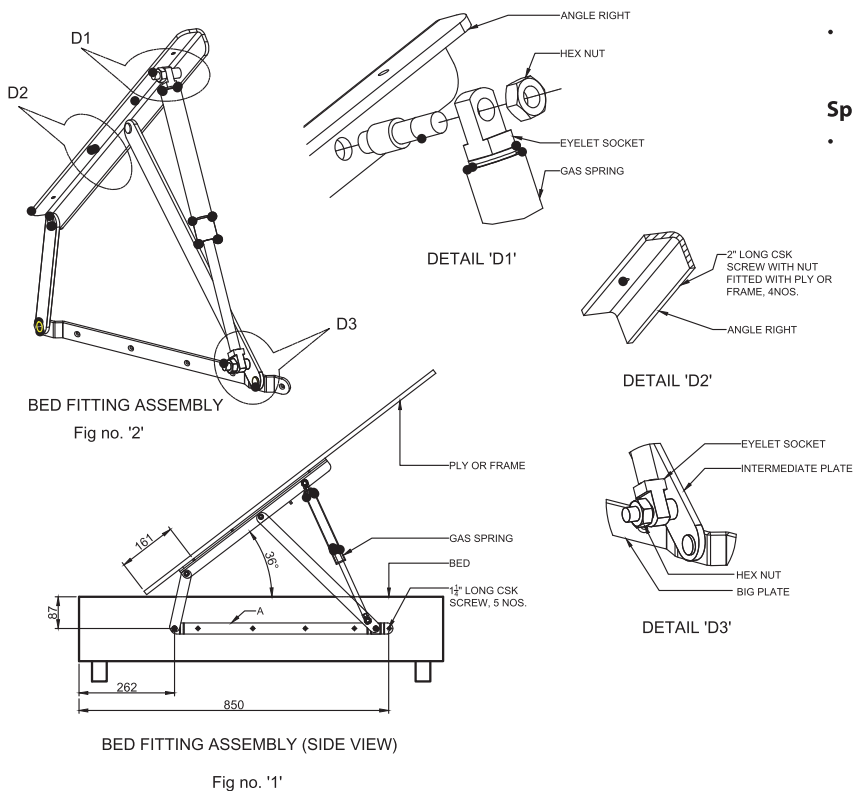

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6030000	BED FITTING FRAME HEAVY DUTY	1	Nos	1
6030100	BED FITTING SHOCK ABSORBER 100kg	1	Set	1
6030125	BED FITTING SHOCK ABSORBER 125kg	1	Set	1
6030150	BED FITTING SHOCK ABSORBER 150kg	1	Set	1
6030175	BED FITTING SHOCK ABSORBER 175kg	1	Set	1
6030200	BED FITTING SHOCK ABSORBER 200kg	1	Set	1

MULTIPURPOSE LOCK



SPECIFICATIONS

Multipurpose Lock - MP (E)
Single Row Pin Cylinder Technology
Available in 22mm size
Reversible key type with 2 no. of keys



SPECIFICATIONS

Multipurpose Lock - MP (P)
Laser Cylinder Technology
Available in 22mm size
Laser key type with 2 no. of keys

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6020100	MULTI PURPOSE LOCK ECONOMICAL (22mm)	1	Pc	20
6020200	MULTI PURPOSE LOCK PREMIUM (22mm)	1	Pc	20

WARDROBE LOCK



SPECIFICATIONS

Wardrobe Lock
Laser Cylinder Technology
Available in 20mm & 25mm size
Laser key type with 2 no. of keys

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6020300	WARDROBE LOCK (20mm & 25mm)	1	Pc	10

MAGNETIC CATCHER



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6010200	MAGNETIC CATCHER	1	Nos	50

SHELF SUPPORT



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6010100	SHELF SUPPORT	1	Pc	5000

CONNECTING FITTINGS



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6010300	CAM 15X18-NICKEL PLATED	1	Pc	2000
6010310	SCREW-IN-DOWEL-M6	1	Pc	2000
6010320	NYLON SLEEVE-10mm DIA (M6)	1	Pc	2000
6010330	WOODEN DOWEL-8x40mm	1	Pc	2000
5016015	CABINET SUSPENSION BRACKET	1	Pc	280

PVC LEG



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6040100	PVC LEG-100mm (4 inch)	1	Pc	140
6040075	PVC LEG-75mm (3 inch)	1	Pc	180
6040101	PVC CLIP	1	Pc	200

PLINTH-BLACK



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6044100	BLACK PLINTH COVER 100mm*3000mm	1	Pc	10
6044150	BLACK PLINTH COVER 150mm*3000mm	1	Pc	10
6045100	BLACK PLINTH 90 DEGREE CORNER 100mm	1	Pc	8
6045150	BLACK PLINTH 90 DEGREE CORNER 150mm	1	Pc	8
6046100	BLACK PLINTH 180 DEGREE CORNER 100mm	1	Pc	4
6046150	BLACK PLINTH 180 DEGREE CORNER 150mm	1	Pc	4

PLINTH-SILVER



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
6041100	SILVER PLINTH COVER 100mm*3000mm	1	Pc	10
6041150	SILVER PLINTH COVER 150mm*3000mm	1	Pc	10
6042100	SILVER PLINTH 90 DEGREE CORNER 100mm	1	Pc	8
6042150	SILVER PLINTH 90 DEGREE CORNER 150mm	1	Pc	8
6043100	SILVER PLINTH 180 DEGREE CORNER 100mm	1	Pc	4
6043150	SILVER PLINTH 180 DEGREE CORNER 150mm	1	Pc	4

ROLLING SHUTTER

Roller Shutters are highly efficient door systems which can be used in numerous applications both horizontally and vertically. The roller shutter door is fully-assembled tambour profile and running mechanism system in one box. It enhances contemporary kitchen designing and are used in modular kitchens. Glass roller shutters are made of tempered safety glass and PVC roller shutters are made of high quality plastics, they are suitable for cabinets having a width of 600 mm.

ROLLING SHUTTER - PVC



SPECIFICATIONS

Material - PVC
Finish - Silver
Width - 600mm
Height - 1340mm



SPECIFICATIONS

Material - PVC
Finish - Grey
Width - 600mm
Height - 1340mm

ROLLING SHUTTER

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4020001	ROLLING SHUTTER PVC 600mm - GREY	1	Set	1
4020002	ROLLING SHUTTER PVC 600mm - SILVER	1	Set	1

ROLLING SHUTTER - GLASS



SPECIFICATIONS

Material - Glass
Finish - White
Width - 600mm
Height - 1340mm



SPECIFICATIONS

Material - Glass
Finish - Black
Width - 600mm
Height - 1340mm

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4020005	ROLLING SHUTTER GLASS 600mm - WHITE	1	Set	1
4020004	ROLLING SHUTTER GLASS 600mm - BLACK	1	Set	1

ROLLING SHUTTER - GLASS



ROLLING SHUTTER


SPECIFICATIONS

Material - Glass
Finish - Frosted
Width - 600mm
Height - 1340mm

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
4020003	ROLLING SHUTTER GLASS 600mm - FROSTED	1	Set	1


ROLLING SHUTTER (PVC)

* 600mm Cabinet Size :-

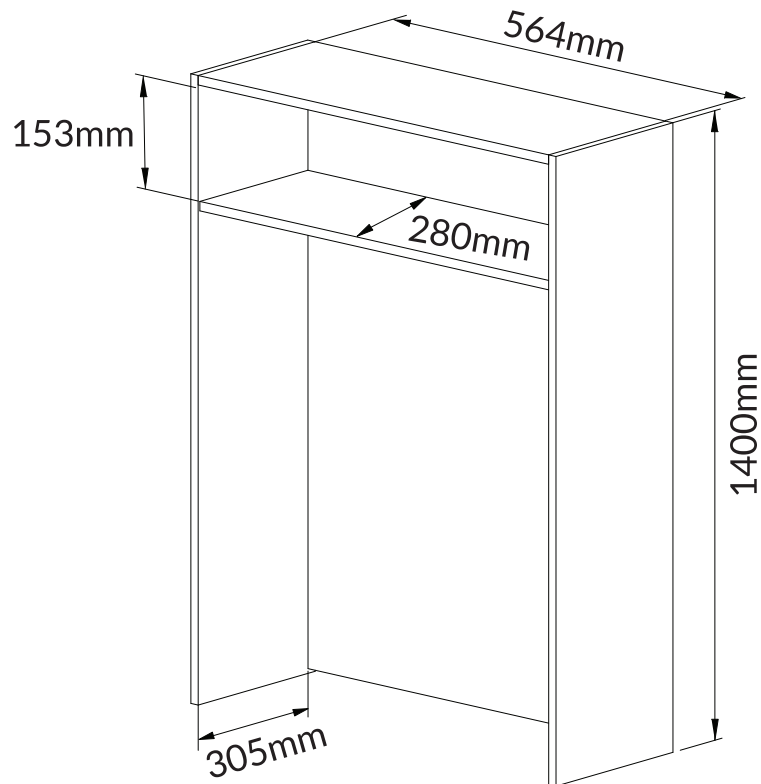


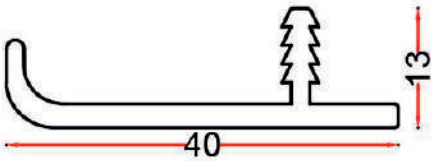



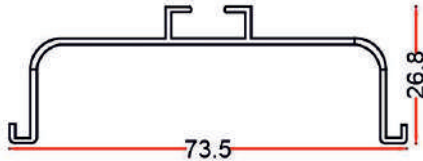

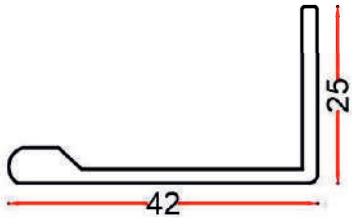





ROLLING SHUTTER (GLASS)




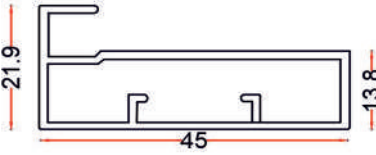


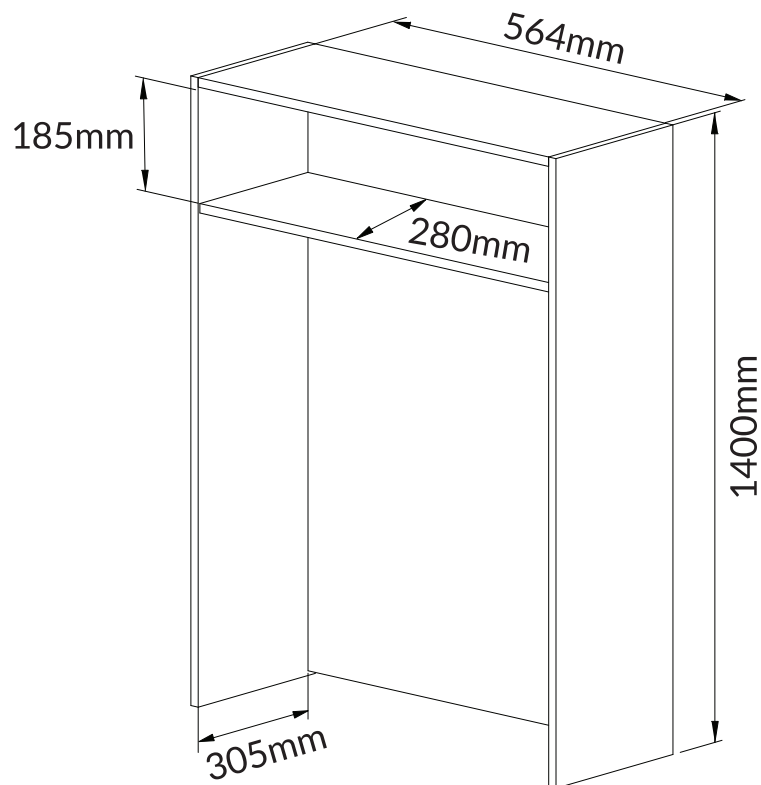






* 600mm Cabinet Size :-



ALUMINIUM PROFILES



			
Products	Drawing	Profile Name - Colour	
7000810		F Profile - Matt	
7000820		F Profile - Rose Gold	
7000830		F Profile - Iron Grey	
7000840		F Profile - Matt Black	
7000850		F Profile - Matt Gold Brush	
7000710		J Gola Profile - Matt	
7000720		J Gola Profile - Rose Matt	
7000730		J Gola Profile - Iron Grey	
7000740		J Gola Profile - Matt Black	
7000750		J Gola Profile - Matt Gold Brush	
7000910		C Gola Profile - Matt	
7000920		C Gola Profile - Rose Matt	
7000930		C Gola Profile - Iron Grey	
7000940		C Gola Profile - Matt Black	
7000950		C Gola Profile - Matt Gold Brush	
7000210		L Profile - Matt	
7000220		L Profile - Rose Gold	
7000230		L Profile - Iron Grey	
7000240		L Profile - Matt Black	
7000250		L Profile - Matt Gold Brush	
7002520		22 mm Frame -- Rose Gold	
7002530		22 mm Frame - Iron Grey	
7002540		22 mm Frame - Matt Black	
7002550		22 mm Frame - Matt Gold Brush	
7002523		22 mm F Handle - Rose Gold	
7002533		22 mm F Handle - Iron Grey	
7002543		22 mm F Handle - Matt Black	
7002553		22 mm F Handle- Matt Gold Brush	

			
Products	Drawing	Profile Name - Colour	
7000110		G Profile - Matt	
7000120		G Profile - Rose Gold	
7000130		G Profile - Iron Grey	
7000140		G Profile - Matt Black	
7000150		G Profile - Matt Gold Brush	
7004510		45 mm Frame - Matt	
7004520		45 mm Frame - Rose Gold	
7004530		45 mm Frame - Iron Grey	
7004540		45 mm Frame - Matt Black	
7004550		45 mm Frame - Matt Gold Brush	
7004511		45 mm L Handle - Matt	
7004521		45 mm L Handle - Rose Gold	
7004531		45 mm L Handle - Iron Grey	
7004541		45 mm L Handle - Matt Black	
7004551		45 mm L Handle - Matt Gold Brush	
7005010		50 mm Frame - Matt	
7005020		50 mm Frame - Rose Gold	
7005030		50 mm Frame - Iron Grey	
7005040		50 mm Frame - Matt Black	
7005050		50 mm Frame - Matt Gold Brush	
7005012		50 mm I Handle - Matt	
7005022		50 mm I Handle - Rose Gold	
7005032		50 mm I Handle - Iron Grey	
7005042		50 mm I Handle - Matt Black	
7005052		50 mm I Handle - Matt Gold Brush	
7000410		J Profile - Matt	
7000420		J Profile - Rose Gold	
7000430		J Profile - Iron Grey	
7000440		J Profile - Matt Black	
7000450		J Profile - Matt Gold Brush	

OSJANG




JEWELLERY BOX
TROUSER RACK
RATTAN STORAGE BASKET
SHOE RACKS
WARDROBE LIFT
TUBE
SHOE RACK - (VERTICAL / REVOLVING)

OSJANG



JEWELLERY BOX



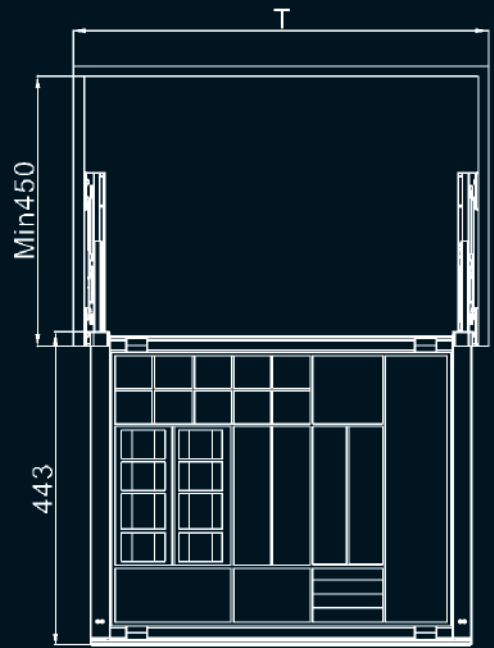

SPECIFICATIONS

Art No. - 5010600
Cabinet Width - 600mm
Size (W, D, H) - 564~584 x 443 x 70mm
Material - High - strength aluminium frame,
with inner box
Colour - Mocca
Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20
with jewellery box
inside with beige fabric

Art No. - 5010900
Cabinet Width - 900mm
Size (W, D, H) - 864~884 x 443 x 70mm
Material - High - strength aluminium frame,
with inner box
Colour - Mocca
Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20
with jewellery box
inside with beige fabric

OSJANG

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5010600	600 mm	1	Set	1
5010900	900 mm	1	Set	1

TROUSER RACK





OSJANG

SPECIFICATIONS


Art No. - 5012600
Cabinet Width - 600mm
Size (W, D, H) - 564~584 x 443 x 70mm
Material - High - strength aluminium frame,
with inner box
Colour - Mocca
Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20

Art No. - 5012900
Cabinet Width - 900mm
Size (W, D, H) - 864~884 x 443 x 70mm
Material - High - strength aluminium frame,
with inner box
Colour - Mocca
Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5012600	600 mm	1	Set	1
5012900	900 mm	1	Set	1

RATTAN STORAGE BASKET



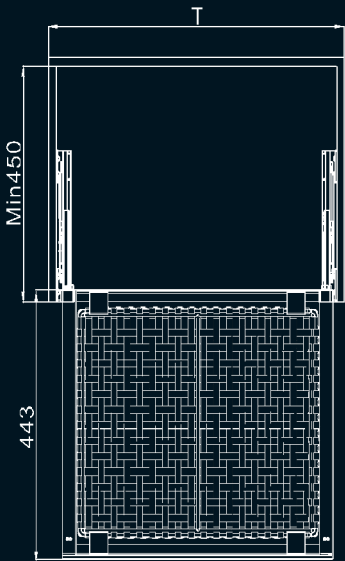

SPECIFICATIONS

Art No. - 5011600
Cabinet (W) - 600
Size (W, D, H) - 564~584 x 443 x 170mm
Material - High - strength aluminium frame,
with PVC rattan basket
Colour - Mocca
Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20
Rattan basket

Art No. - 5011900
Cabinet Width - 900
Size (W, D, H) - 864~884 x 443 x 170mm
Material - High - strength aluminium frame,
with PVC rattan basket
Colour - Mocca
Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20
Rattan basket


OSJANG

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5011600	600 mm	1	Set	1
5011900	900 mm	1	Set	1

BLUE BOOK DETAIL

SHOES RACK



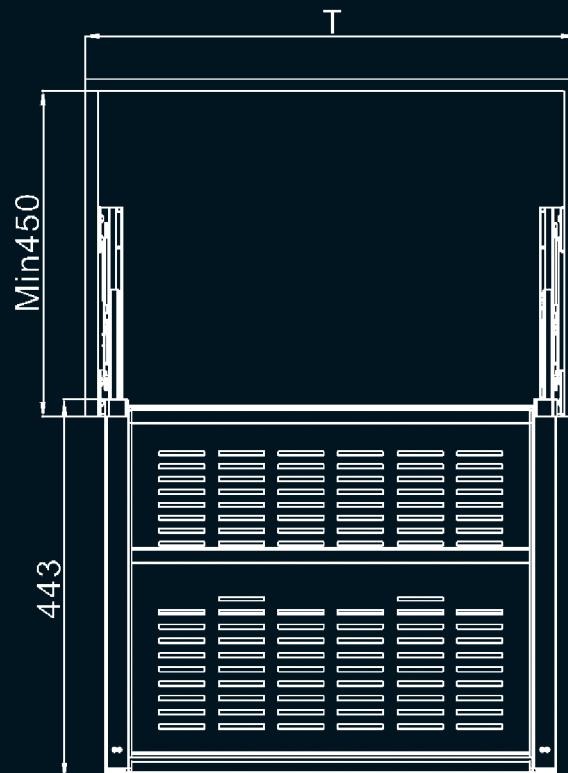

SPECIFICATIONS

Art No. - 5013600

Cabinet (W) - 600mm

Size (W, D, H) - 564~584 x 443 x 170mm

Material - High-strength aluminium frame,
with steel board type shoes rack

Colour - Mocca

Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20

Art No. - 5013900

Cabinet (W) - 900mm

Size (W, D, H) - 864~884 x 443 x 170mm

Material - High-strength aluminium frame,
with steel board type shoes rack

Colour - Mocca


Description - Two-way soft closing
Soft closing distance 53mm
Adjustable max +20

OSJANG

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5013600	600 mm	1	Set	6
5013900	900 mm	1	Set	6


WARDROBE LIFT



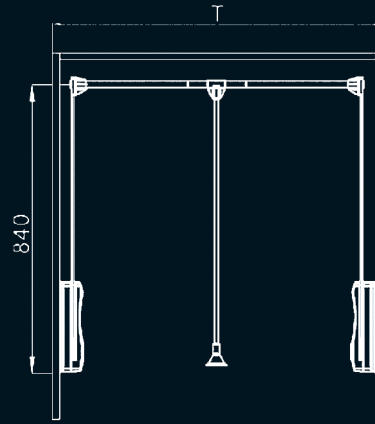

SPECIFICATIONS

Art No. - 5015001
Size (Cabinet width T) - 880 ~ 1270mm
Material - Aluminium
Colour - Mocca
Description - Soft closing
Smooth and quiet

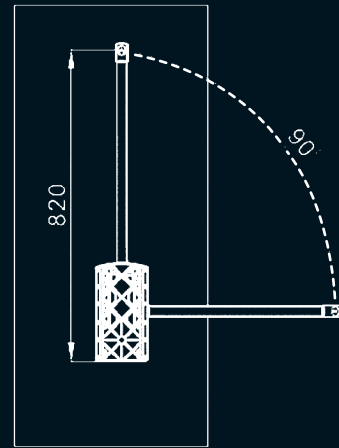


OSJANG

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5015001	880mm- 1270mm	1	Set	6

TUBE



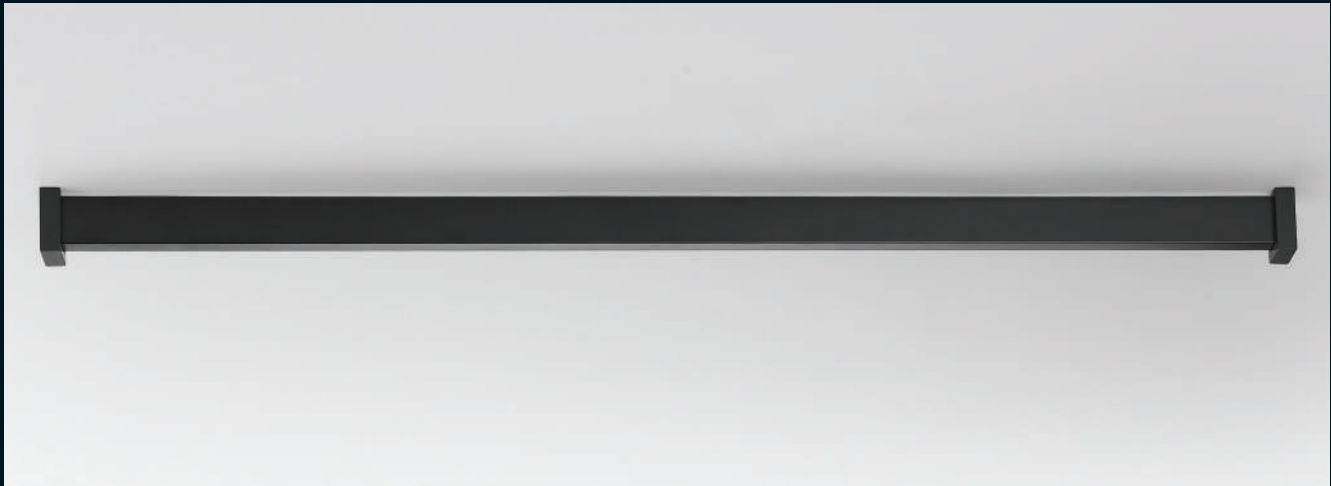

SPECIFICATIONS

Art No. - 5016001
Size - 3000mm
Material - Aluminium
Colour - Mocca
Description - Side mounted clothes hanger
Simple and fashion


Art No. - 5016002
Material - Zamak
Colour - Mocca
Description - 2pc ST4*16 screw

OSJANG

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5016001	3000mm	1	Set	1
5016002	Mount	1	Set	1

REVOLVING SHOE RACK



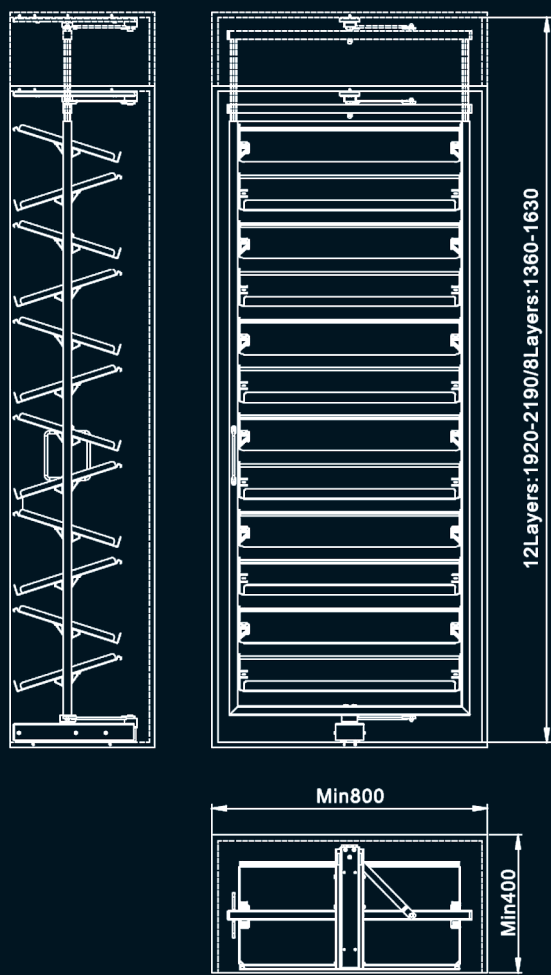

OSJANG

SPECIFICATIONS


Art No. - 5014012
Cabinet Width - 800mm
Size (W, D, H) - 700x340 x 2000 ~ 2250mm
Twelve layers shoe rack

Colour - Mocca
Description - 360 degrees revolving
frame can be adjustable
270mm 12 layers

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5014012	800 mm	1	Set	1

DIGITAL LOCKER



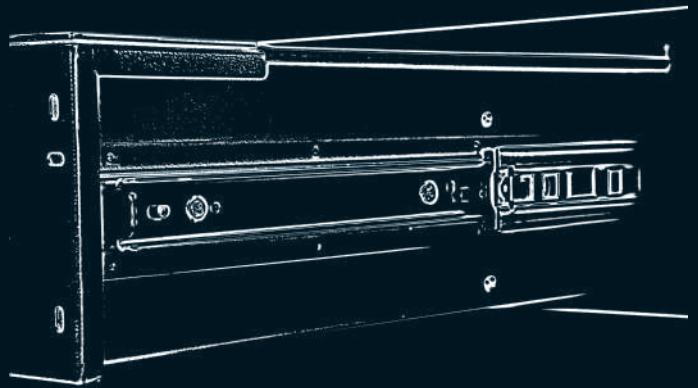

SPECIFICATIONS

Art No. - 5017600
Cabinet Width - 600mm
Size (W, D, H) - 564 x 400 x 150mm
Colour - Mocca
Description - touchscreen password /
fingerprint password / key concealed locker

OSJANG

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5017600	KUMGO- Concealed locker	1	Pc	1

WARDROBE TUBE-BLACK



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5016010	RECTANGULAR WARDROBE TUBE BLACK 12x30 (3000mm)	1	Pc	10
5016011	RECTANGULAR SUPPORT WALL TO WALL	1	Pc	80
5016012	RECTANGULAR END TOP SUPPORT	1	Pc	50
5016013	RECTANGULAR CENTER SUPPORT	1	Pc	50
5016014	RECTANGULAR TWO WAY SUPPORT	1	Pc	20

WARDROBE TUBE-CHROME



ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5016003	OVAL TUBE CP (3000mm)	1	Pc	10
5016004	OVAL WALL TO WALL SUPPORT ECO CP	1	Pc	200
5016005	OVAL WALL TO WALL SUPPORT STANDARD CP	1	Pc	80
5016006	OVAL WALL TO WALL SUPPORT CP PREMIUM	1	Pc	80
5016007	OVAL END TOP SUPPORT CP	1	Pc	50
5016008	OVAL CENTER SUPPORT CP	1	Pc	50
5016009	OVAL SUPPORT TWO WAY CP	1	Pc	20

DOUBLE TRACK SLIDING

**Double
Track Sliding**

SLIDING



Double Track Sliding

Double Track Sliding



Features

- Track length available 2.4 m and 4 m
- Two finishes available aluminium matt and matt black
- Soft opening and soft closing
- Maximum shutter size 1200 x 2400 mm
- Maximum weight capacity 50 kg per shutter
- Bottom cover profile for dust protection

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5019010	Double Track Sliding Kit	1	Set	10
7000511	Sliding Profile Top 2.4M - Matt	1	Set	10
7000512	Sliding Profile Bottom 2.4M - Matt	1	Set	10
7000513	Sliding Profile Cover 2.4M - Matt	1	Set	10
7000541	Sliding Profile Top 2.4M - Matt Black	1	Set	10
7000542	Sliding Profile Bottom 2.4M - Matt Black	1	Set	10
7000543	Sliding Profile Cover 2.4M - Matt Black	1	Set	10
7000611	Sliding Profile Top 4M - Matt	1	Set	10
7000612	Sliding Profile Bottom 4M - Matt	1	Set	10
7000613	Sliding Profile Cover 4M - Matt	1	Set	10
7000623	Sliding Profile Cover 4M - Matt Black	1	Set	10
7000641	Sliding Profile Top 4M - Matt Black	1	Set	10
7000642	Sliding Profile Bottom 4M - Matt Black	1	Set	10




5019010

Soft Closing Sliding Door System Installation Guide

Accessories	Picture	2 Door	3 Door	Accessories	Picture	2 Door	3 Door
Upper runner		4PCS	6PCS	Down runner		4PCS	6PCS
Allen key		1PCS	1PCS	ST4X14 Cross recessed pan head tapping screw		32PCS	48PCS
Upper rail		1PCS	1PCS	Down rail		1PCS	1PCS
Spacer		8PCS	12PCS	Down rail cover (For optional)		1PCS	1PCS
Damper						4PCS	4PCS

Rail Size	Wood door installation picture	Aluminum frame door installation picture	Aluminum frame picture (option)
 38mm 73.1mm Upper rail			 16mm Upper/Down Frame
 38mm 69.1mm Down rail			 16.4mm Middle Frame
 27.6mm 5.3mm Down rail cover (for optional)			 16.4mm Profile Handle


SLIDING

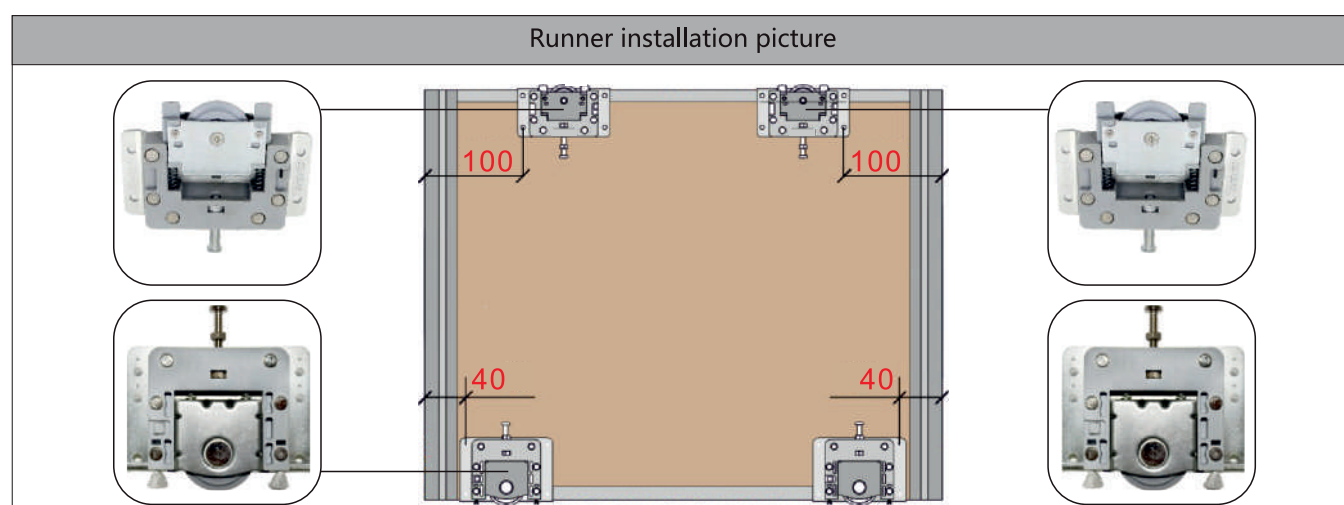


1.Damper installation




Attention for damper direction





Attention for damper direction

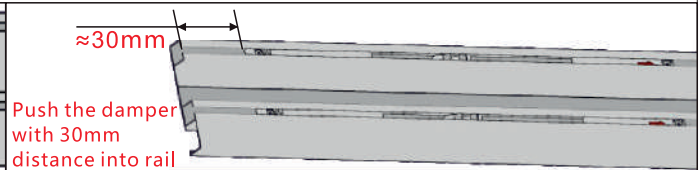

2.Rail installation

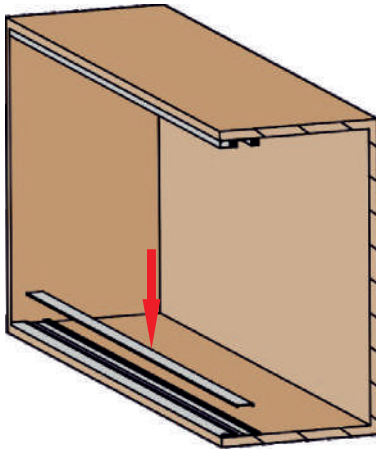


3.Runner installation

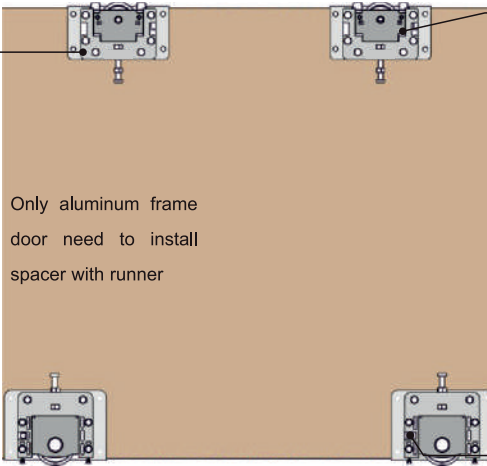



Lock upper runner

Lock down runner



4.Door installation

First install down runner, then upper runner
unlock runner after door installation

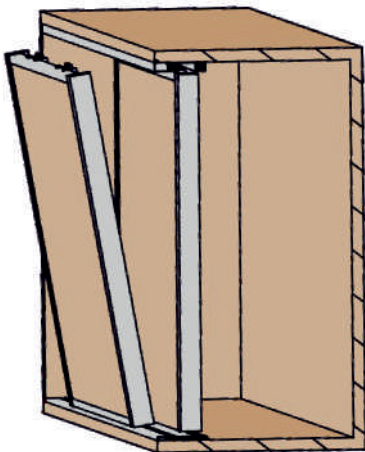


unlock upper runner

unlock down runner




5.Damper position

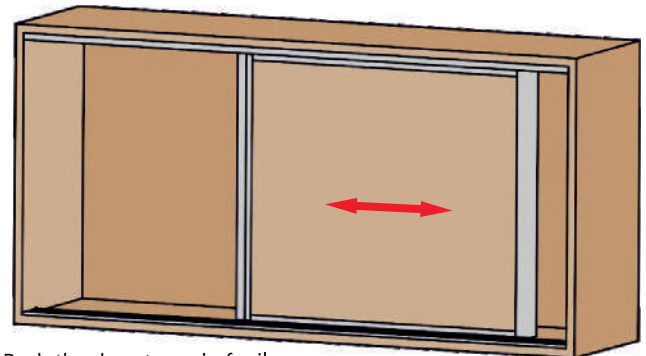


Push the door to end of rail

6.Screw the damper

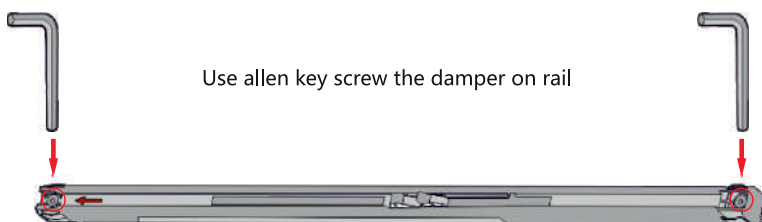

7.Regulate the door gap

1.Regulate the screw on runner

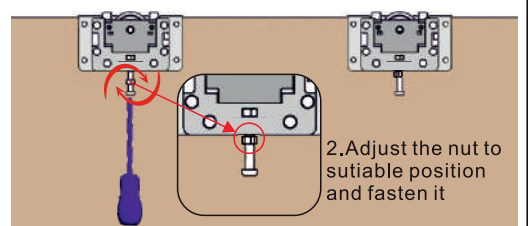


PLUTO DAMPING SLIDING SYSTEM



SLIDING




PLUTO DAMPING SLIDING SYSTEM

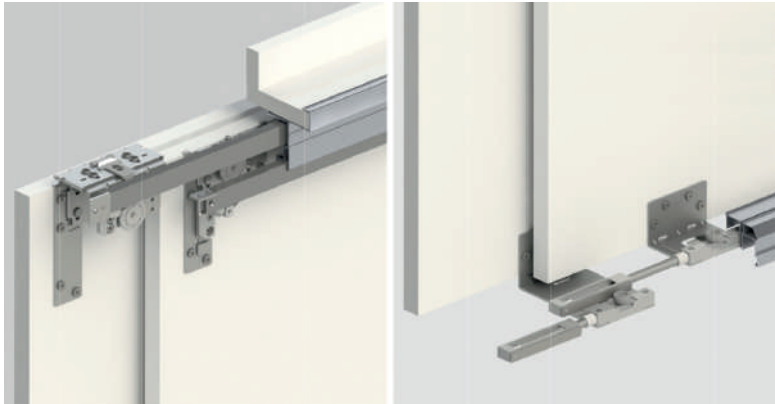

Features

- Available in 3Mtrs only
- Finish Available In Silver Matt
- Each Door Comes With Soft Opening & Soft Closing
- Maximum Shutter Height 2400mm
- Maximum Weight Capacity 50kg Per Shutter

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5019020	PULUTO DAMPING SLIDING SYSTEM (2 Doors)	1	Set	4
5019030	PULUTO DAMPING SLIDING SYSTEM (3 Doors)	1	Set	4

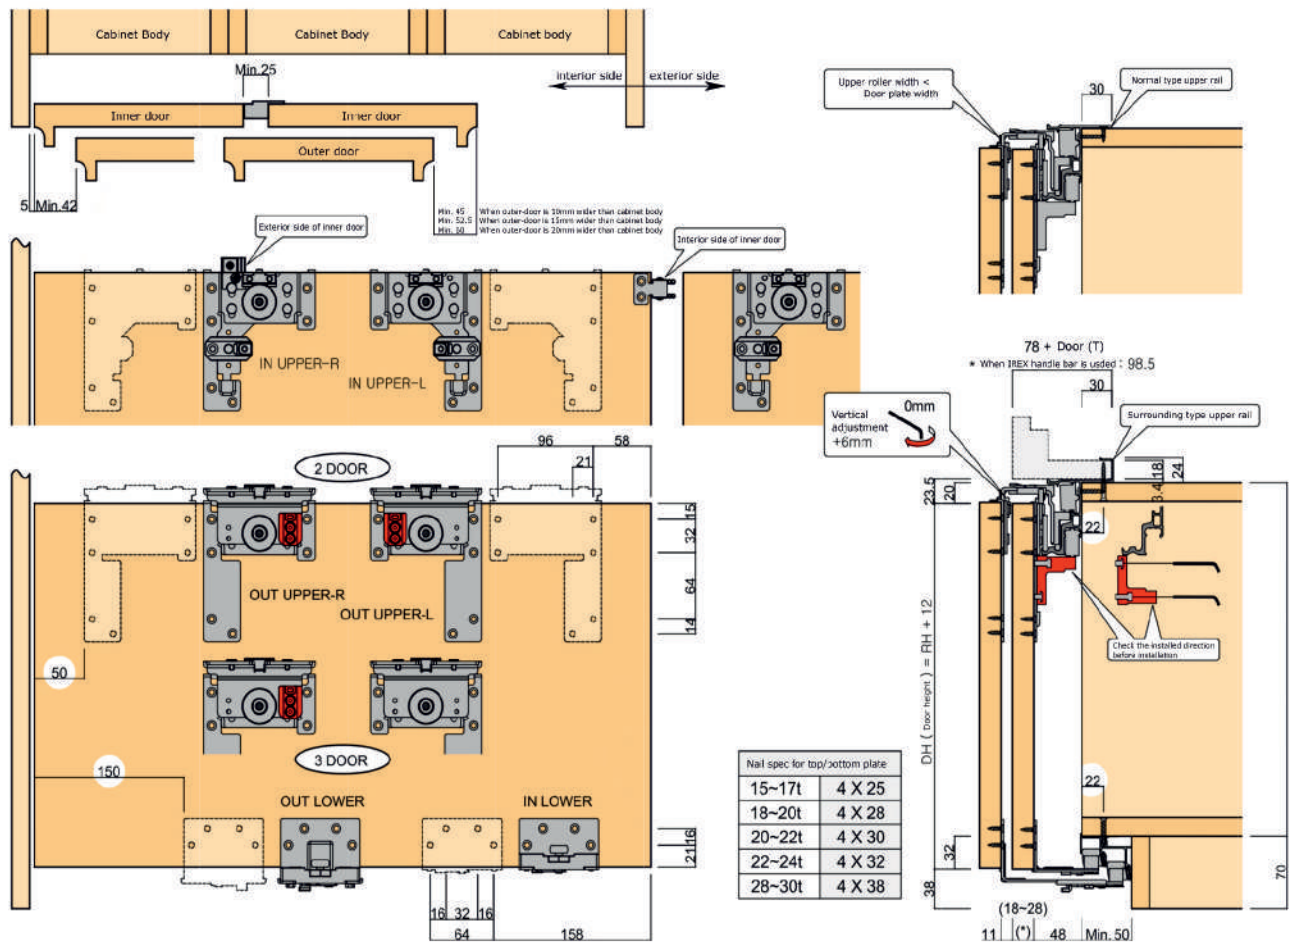


SPECIFICATION	Q'TY		SPECIFICATION	Q'TY		SPECIFICATION	Q'TY		SPECIFICATION	Q'TY	
	2D8	3D11		2D8	3D11		2D8	3D11		2D8	3D11
OUT UPPER -R	1	1	OUT UPPER -L	1	0	HANDLE GUARD M5*6	1	2	INNER DOOR STOPPER 4*16 STEEL SCREW	0	1
						4*38 SCREW	10	10	4*28 SCREW	10	10
			OUT UPPER -LX	0	1	4*16 SCREW	40	60	4*25 SCREW (WASHER HEAD)	10	10
						L- WRENCH (3mm)				1	1
IN UPPER -R	1	2	IN UPPER -L	1	2	LOWER DAMPER				4	4
						UPPER DAMPER (for IN DOOR)				2	4
OUT LOWER	2	2	IN LOWER	2	4	UPPER DAMPER-R (for OUT DOOR)				1	1
						UPPER DAMPER-L (for OUT DOOR)				1	1
			RAIL CONNECTOR STEEL PLATE + M4*15 BOLT	OPTION		MIDDLE DAMPER				0	1


FRONT RUNNING SLIDING SYSTEM

INSTALLATION GUIDE


Drill on side plate & upper rail

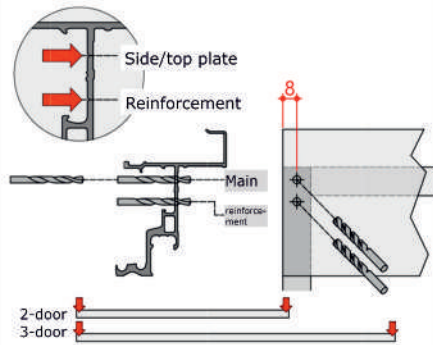

Drill on top plate & upper rail

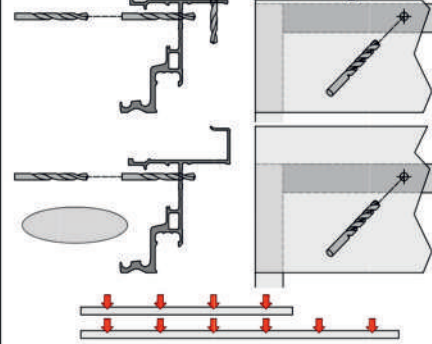


Insert dampers in upper/lower rails

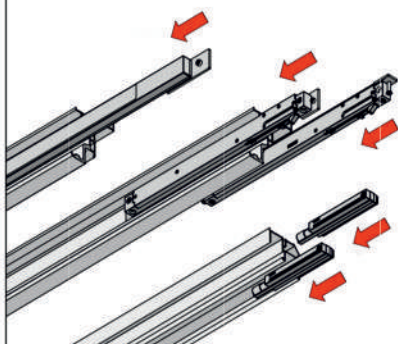


Drill on interior side of top plate


*Only for surrounding type

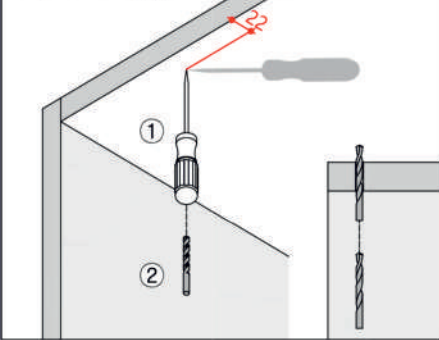


Fix rail position with nails

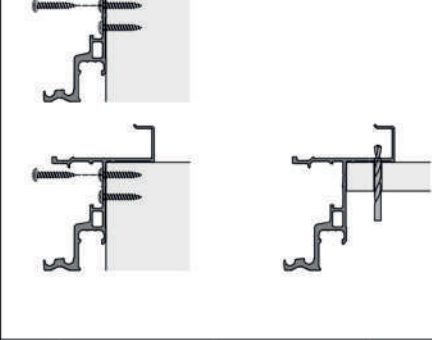


Add more nails to fix the rail firmly

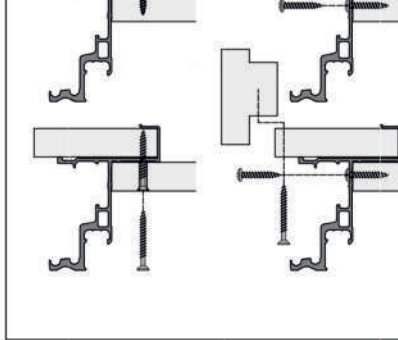


Drill on the bottom plate & install lower rail

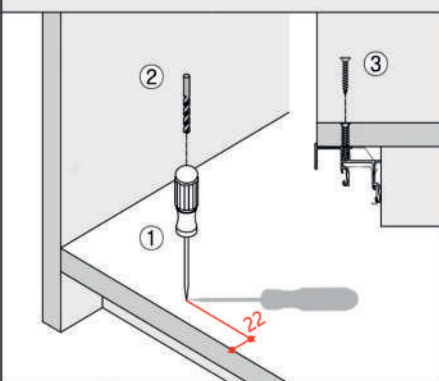


Adjust depth of outer roller (initial D=22)

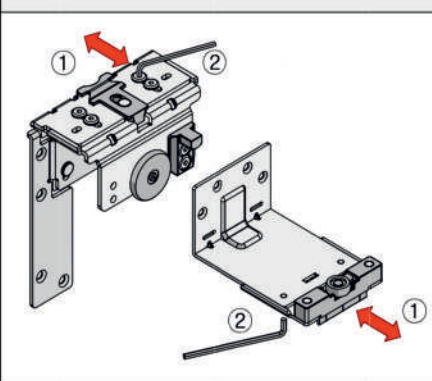


Install handle guard & inner upper roller

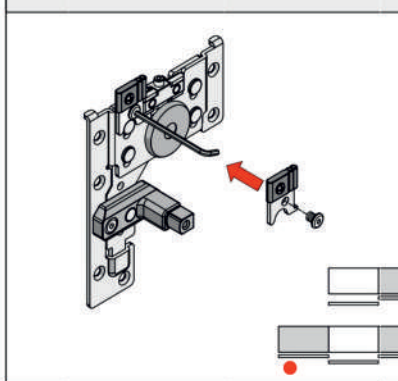


Install inner door stopper for 3-door-type

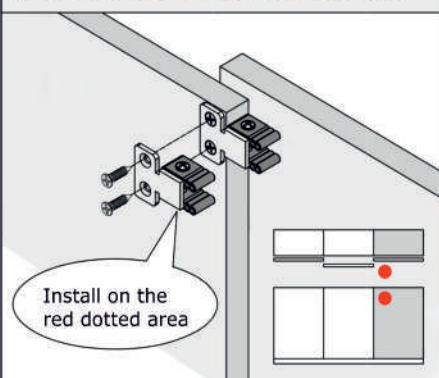


Unfasten vertical adjustment bolt (0mm)

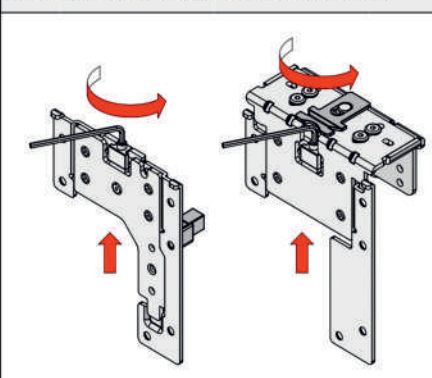

Install upper/lower rollers on the doors

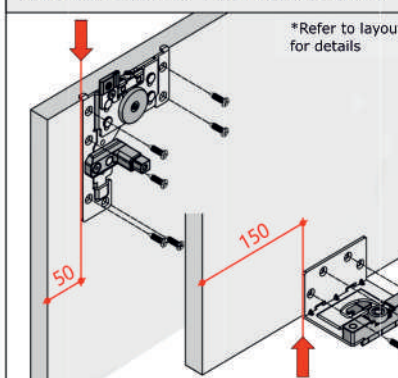


Recommended to install inner door first for 2-door type

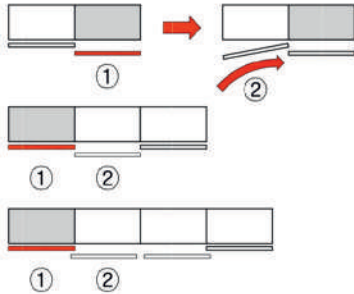


*Inner door can be installed first; if enough moving space for upper damper is obtained.


Release the fixation lever & install inner door

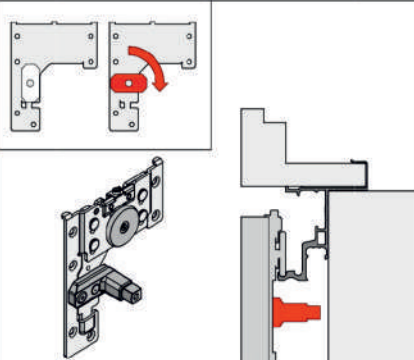


Install inner door upper damper & lock the fixation lever. Then fix the inner lower roller

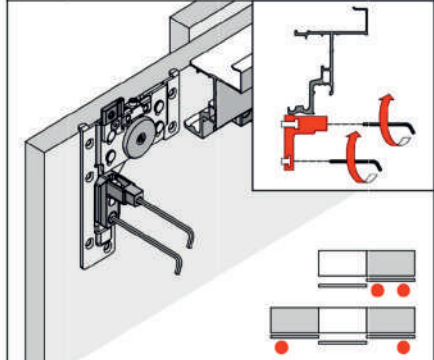


Lock the fixation lever on interior side & fix inner lower roller

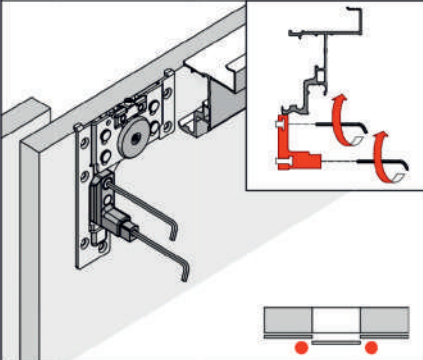


Release the fixation lever & install outer door

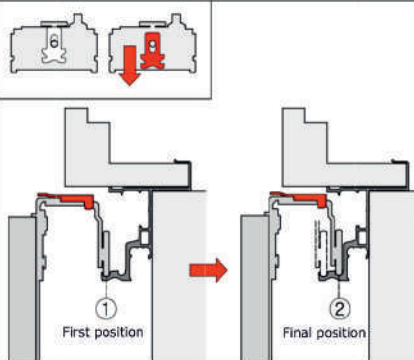


Lock the fixation lever on outer door

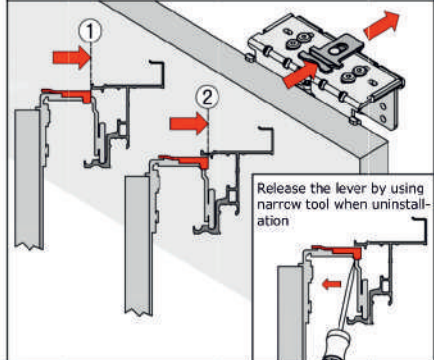


Fix the lower roller for outer door

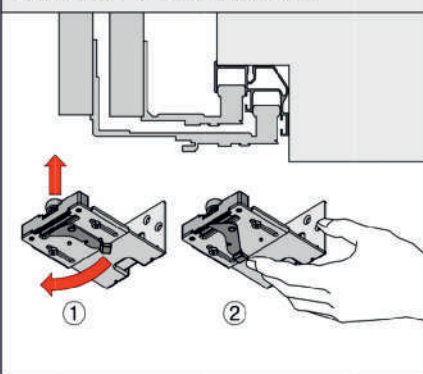


Move the trigger and install on roller

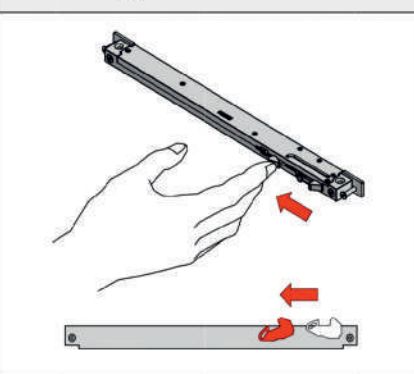

Adjust the damper position by sliding the door & install on appropriate position

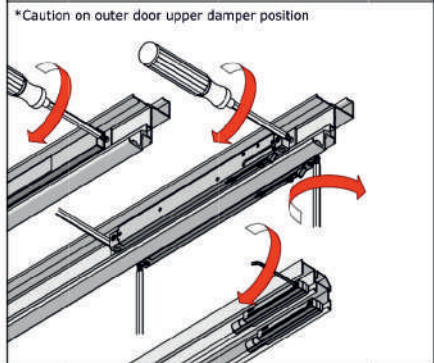


Remove the damper band & adjust bearing position

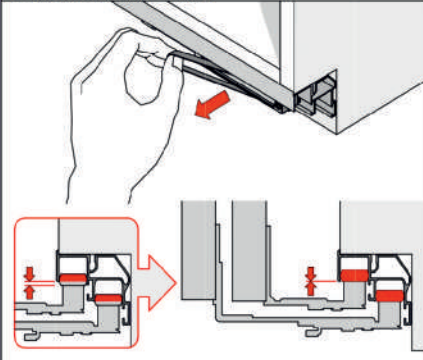


Fasten to adjust door vertical position.

*Unfasten the bolt thoroughly when uninstallation

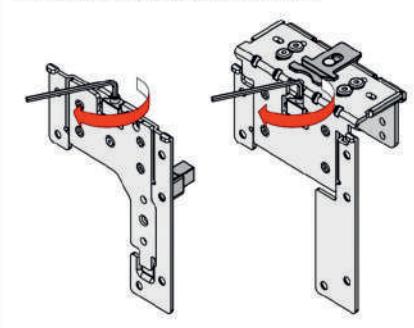


Make sure the fixation lever is fastened tight

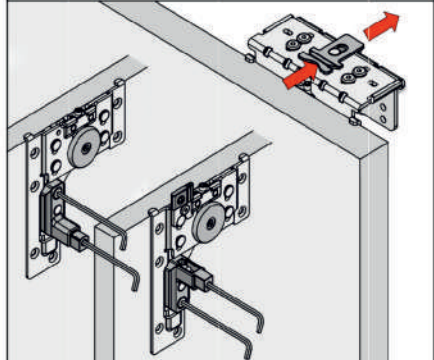


FRONT RUNNING SLIDING SYSTEM

DAMPER & BUFFER LAYOUT CHART

2 / 4 DOORS LAY-OUT

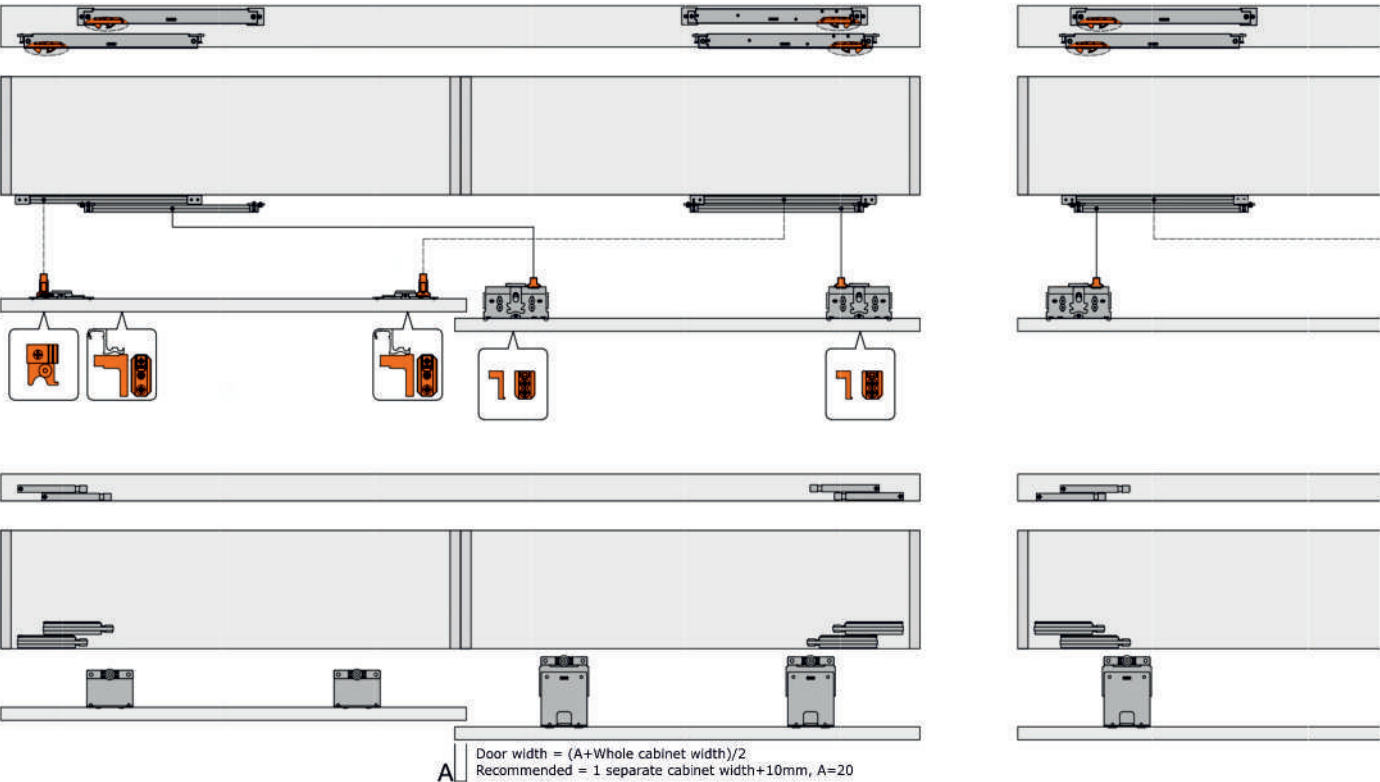

3 DOORS LAY-OUT

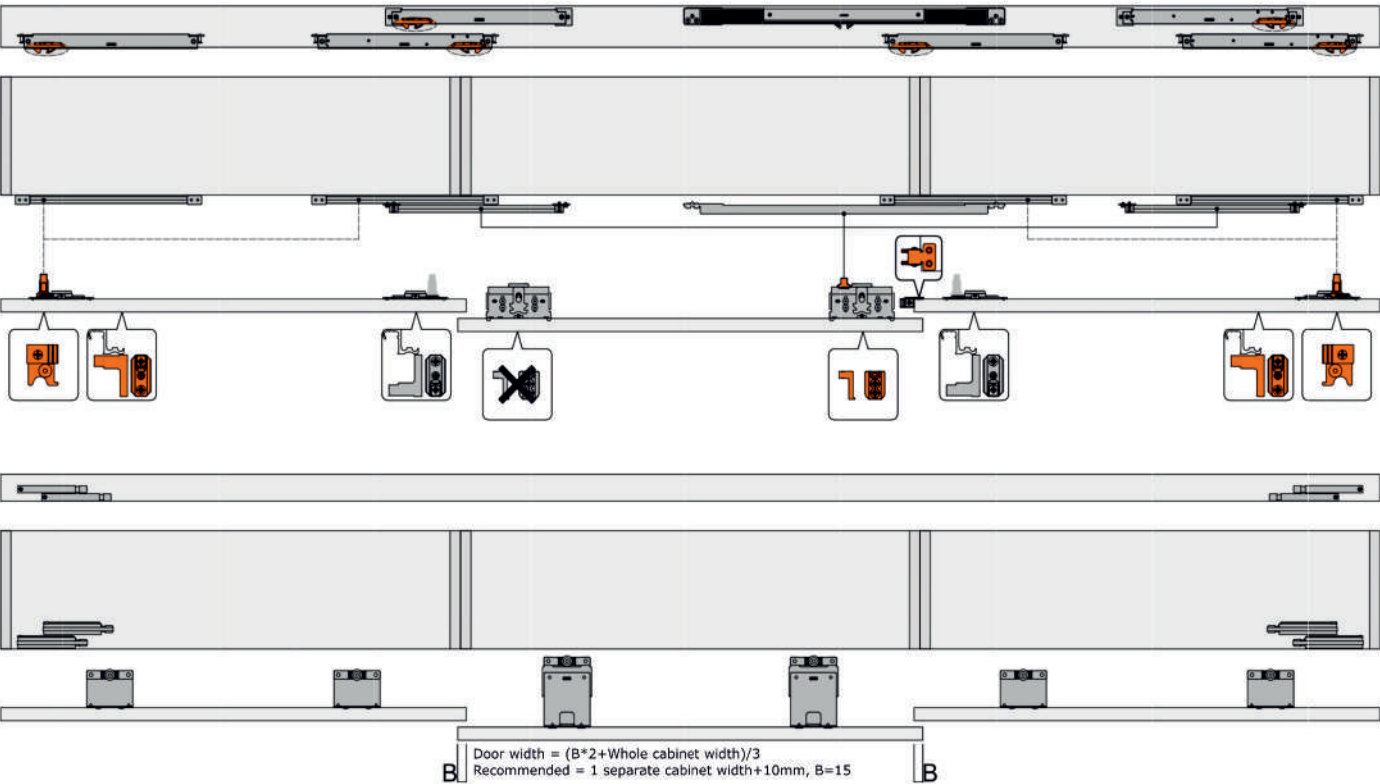

PRODUCT OVER VIEW

I-bar

-bar

-bar 

door width = cabinet width + 10
door-plate W = door width - 20

42
19.5 19 3.5

10 10

1.5 19 3.5 24

L-bar = door width - 30
= door plate W - 10

15 15

H-bar = door width - 30
= door plate W - 10

15 15
19 (cut-out on rear side) 19

T-bar = door width - 30
= door plate W - 10

15 15

Technical drawings of the door handle assembly showing side and front views with dimensions.

Side View Dimensions:

- Top width: 42
- Bottom width: 24
- Overall width: 18-193.5
- Door height = handle bar length
- 2 (Caps)

Front View Dimensions:


- Top cap height: 8
- Cap width: 11
- Cap offset: 2
- Min. 7
- Door height
- 1.7

SLIDING


DOOR HANDLE PROFILE SYSTEM

DOOR HANDLE LAYOUT CHART


PLUTO/ FRONT TYPE

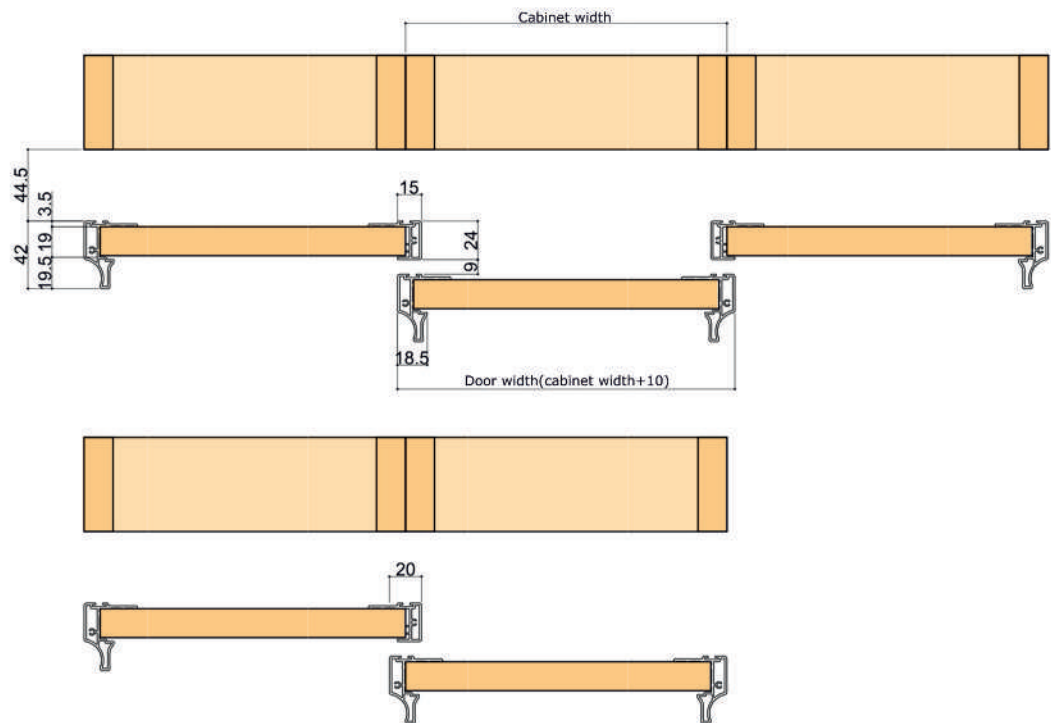

URANOS/ UPPER TYPE

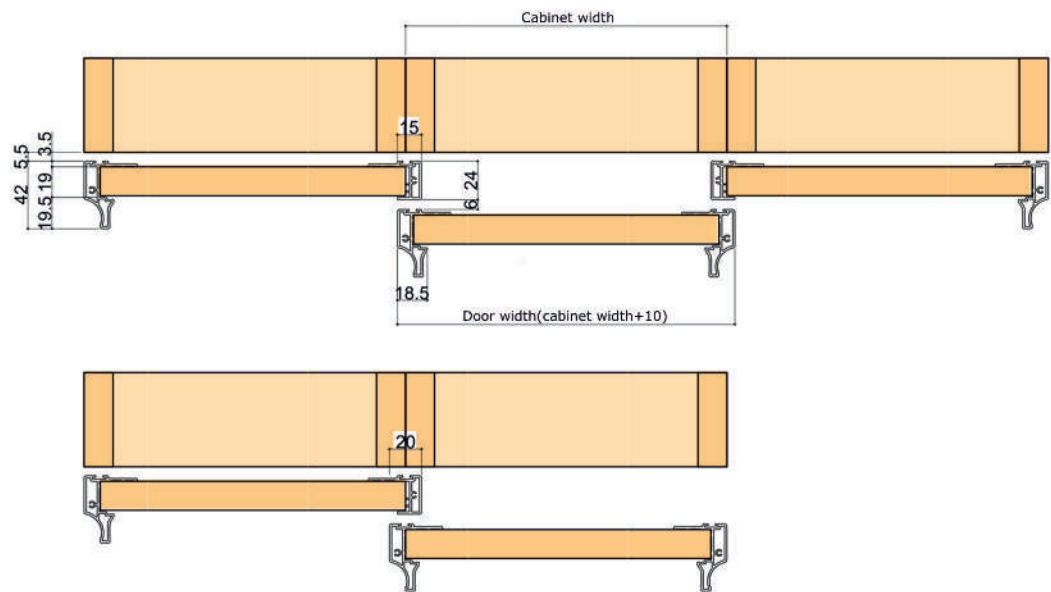

Handle / side bar

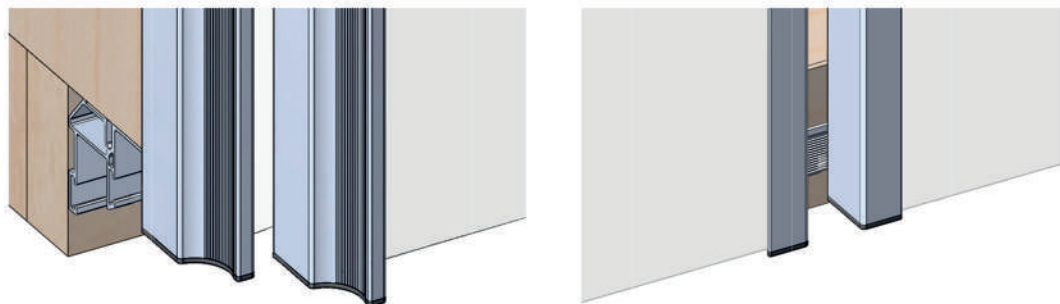

PUSH TO OPEN FITTING



P 2 O
FITTING

PUSH TO OPEN FITTING



Features

- Can Be Used For Aluminium And Wooden Shutters
- maximum height 2700 mm
- maximum width 600 mm
- weight capacity - 20kg/per shutter

ARTICLE CODE	DESCRIPTION	QTY.	UNIT	PU
5018020	PUSH TO OPEN - HEAVY DUTY DAMPING SYSTEM WITH 6 NON SPRING HINGES	1	Set	1

ONE TOUCH PUSH OPENING AND SOFT CLOSING DOOR SYSTEM


User Manual

Attention:

1. Before using this product, please read the function introduction and operation manual carefully, and use it according to the correct method.
2. In case of any abnormality in the process of using the product, please ask the professional installation personnel or the manufacturer for help in time.
3. It is forbidden to disassemble this product by non professional personnel. Unauthorized disassembly of this product may cause accidental injury.
4. Our company will not be responsible for any abnormality or accident caused by failure to operate according to the operation instructions.


OT- one touch push self opening and soft closing door system adopted door size

	Light version	Heavy version	Ultra heavy version
Weight	≤ 7.5 Kg	≤ 20 Kg	≤ 25 Kg
W	≤ 600mm	≤ 2700mm	≤ 2800mm
H	≤ 700mm	≤ 600mm	≤ 600mm
Angle	≤ 110°		



The quantity of unsprung hinges for the door

The quantity of hinges depends on the width, the height and the weight of door. Please take the drawing to the right for reference.

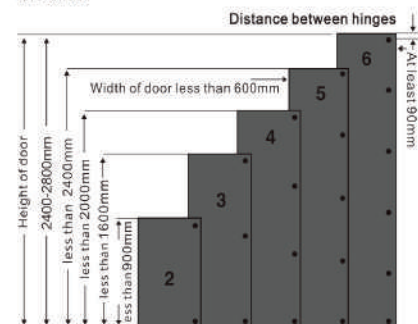


1 Check whether the accessories are complete according to the following list, and carefully read and follow the contents of the warning label


Accessory Name	Sketch	Quantity
OT main part accessory		1
Chute accessory		1
Wooden screw M4x16		4

Accessory Name	Sketch	Quantity
Pan head wood screw M4X14		2
Activator cover		2
Chute installation screw cover		2
Screw hole positioning paper		2


2 Take out the OT main part accessory, pull the crank to the rear and keep it in this direction, then remove the mounting bracket from the OT

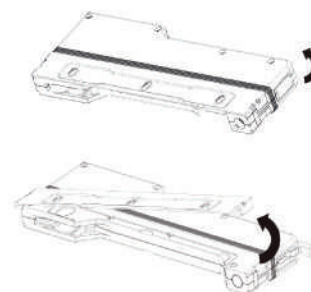

3 Install the matched hinge, and adjust the door to open and close smoothly (the gap is required to be about 2mm)

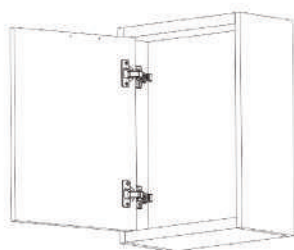

4 Install the mounting bracket on the top plate of the cabinet with the arrow pointing outwards and fix it with three M4 countersunk head screws. Installation parameters are as follows (or punch holes according to the positioning paper)

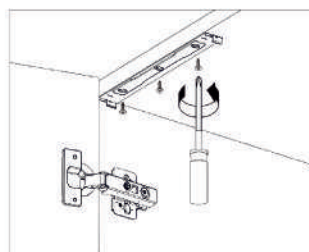


Installation data as below:


Remark: T is the door panel thickness

Full Overlay Installation Data	Side panel	170 101 32 12.5	Top panel
Half Overlay Installation Data	Side panel	179 110 41 12.5	Top panel
Insert Installation Data	Side panel	188 119 50 12.5+T	Top panel


- 5** Install the main body of the OT on the mounting bracket and fasten the clamping position on the main body to the corresponding clamping position on the mounting bracket

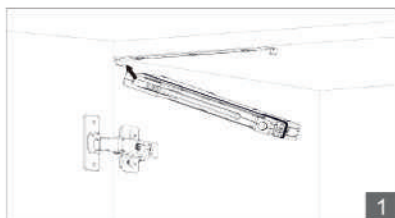

Press the other side of the main body upward into the other side of the mounting bracket for bucking

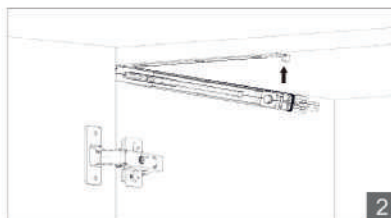


Move the crank from the rear to the front.

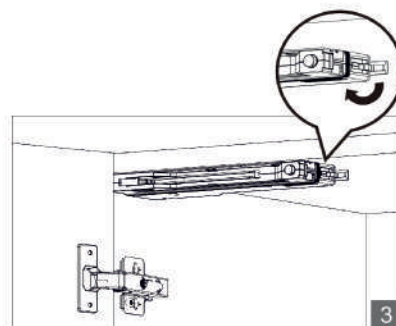

- 6** Install the chute assembly on the door panel with the following installation parameters, or punch according to the positioning paper

Installation parameter: L value changes according to cover position and K value, refer to the following table for details;

$H=T+9+h$, (T for thickness of top panel; h for the height difference between the top of the door panel and the top of the top panel. (Note: If the top of the door panel is flush with the top of the top panel, $h=0$; if the door panel is higher than the top panel h is a positive number; if the door panel is lower than the top panel, h is a negative number))

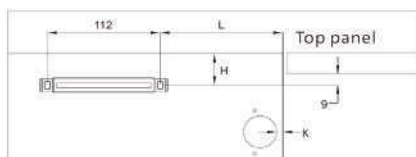

Installation data as below


overlay K	16	17	18	19	20
3	76	77	78	79	80
4	77	78	79	80	81
5	78	79	80	81	82

- 7** Release the putter until it is fully open.


Check whether the chute is relatively parallel to the putter.

According to the parameter table, drive the M4x14 pan-head wood screw into the wood board for installation


(Note: During the release of the push rod, please follow the warning label.)

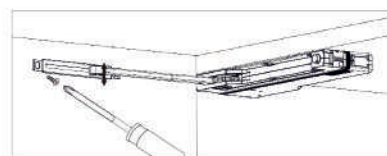


- 8** Put the end of the push rod into the chute part and push the slider to buckle state according to the picture as show in below

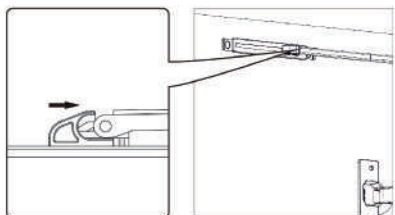


- 9** Push the cover of the chute into the rail by following the arrow direction for installation

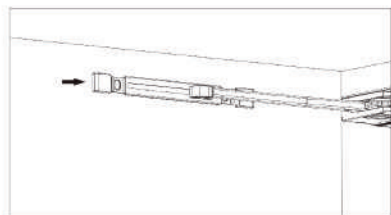


- 10** Close & open the OT in several rounds by normal touch, and check whether the function is normal (The stretching length of the trigger screw can be adjusted according to the sensitivity or the requirement of the door gap)

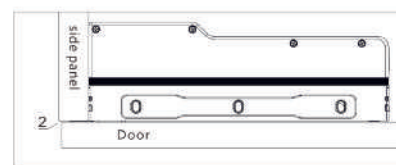

- 11** After confirming that the function is normal, tighten the screw in one cycle, and then push the screw cover by follow the arrow direction to cover the screw

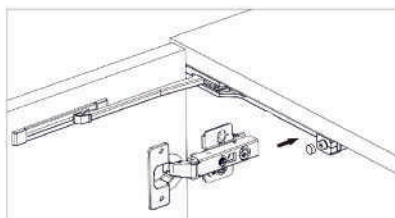

- 12** (optional) push the extension activator componet into the specified slot along the arrow direction, and install it with M4 x 20 pan head wooden screws.

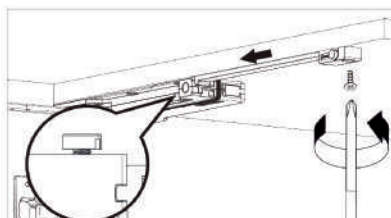

HEAD OFFICE:

SAMSUNG IREX INDIA LLP

F -02, Unit 11 & 12, Emaar The Palm Square,
Golf Course Extn. Road, Gurgaon-122102 (Haryana)
Care: 8700536001
Toll free: 1800 1204 920

Global HQ



Samsung Precision Ind. Co. Ltd.

Incheon, Seoul, South Korea
167, Bongsu-daero, Seo-gu, Incheon-seoul,
South Korea

Warehouse :

Plot No. 178, Sector-4, IMT Manesar,
Gurgaon-122050 (Haryana)

WORKS:

82, Sector-7, IMT Manesar,
Gurgaon-122050 (Haryana)

DISPLAY CENTRES

IREX

Experience Centre Delhi:

13 FF, Mansarovar Garden,
Main Road, Kirti Nagar,
New Delhi-110015

BRASSAGE

C-13, Qutub Plaza, DLF Phase-1,
Gurgaon-122016, (Haryana)

Experience Centre Faridabad:

Amolik Plaza, Sector -81, Greater Faridabad,
Haryana -121006

IREX Boutique Delhi

1488, Gali No. 5, Wazir Nagar, Kotla Mubarakpur,
New Delhi-110003

WEBSITES

www.samsungirexindia.com

www.brassage.in

Follow us on -

www.instagram.com/samsung.irex/
 www.facebook.com/samsungirexindia/
 www.linkedin.com/in/samsung-irex-india-772059183/
 www.twitter.com/SamsungIrex

Follow us on -

[instagram @brassage.in](https://www.instagram.com/brassage.in)

